

SERIES 878 & 880 TERMINAL BLOCKS

THUMB LEVER TYPE NO SCREW AVAILABLE

SPECIFICATIONS AND APPLICATIONS

- THUMB LEVER ACTUATED WITHOUT ANY SPECIAL TOOL TO SECURE THE CABLES
- SUPPLIED WITH STAND-OFFS FOR FLUX REMOVAL.
- ANTI-SHOCK CONTACT DESIGN.
- DIMENSIONS ARE FOR REFERENCE ONLY.
- WE RESERVE THE RIGHT TO CHANGE DIMENSIONS WITHOUT NOTICE.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].
- MARKINGS CAN BE 1 TO 24 OR A TO Z

TECHNICAL DATA

MATERIAL

BODY: GREEN THERMOPLASTIC, UL 94V-0
 TERMINALS: TIN PLATED BRASS
 CAM LEVERS: WHITE THERMOPLASTIC, UL 94V-0

ELECTRICAL


CURRENT RATING: 10 AMPS
 VOLTAGE RATING: 250 VOLTS
 DIELECTRIC VOLTAGE: 2000 VOLTS
 INSULATION RESISTANCE: > 500 M OHMS

MECHANICAL

OPERATING TEMP: -65° + 125°C
 RECOMMENDED AWG: 18 - 22 STRANDED
 APPROVALS: CSA-LR 102085

878 SERIES


DIMENSION: PITCH .200in [5.08mm]

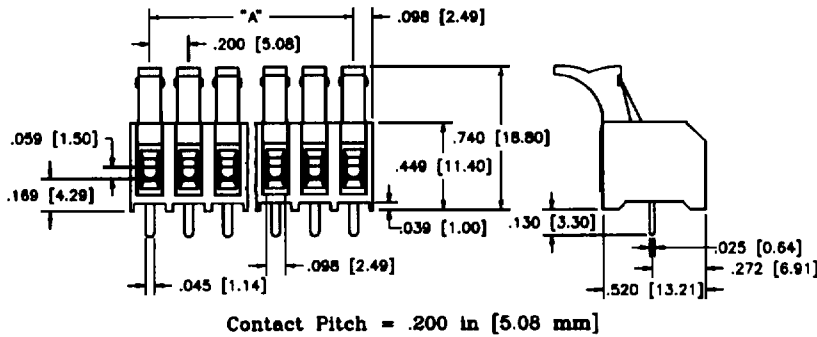

POLE	"A"	POLE	"A"
2	.200 [5.08]	14	2.600 [66.04]
3	.400 [10.16]	15	2.800 [71.12]
4	.600 [15.24]	16	3.000 [76.20]
5	.800 [20.32]	17	3.200 [81.28]
6	1.000 [25.40]	18	3.400 [86.36]
7	1.200 [30.48]	19	3.600 [91.44]
8	1.400 [35.56]	20	3.800 [96.52]
9	1.600 [40.64]	21	4.000 [101.60]
10	1.800 [45.72]	22	4.200 [106.68]
11	2.000 [50.80]	23	4.400 [111.76]
12	2.200 [55.88]	24	4.600 [116.84]
13	2.400 [60.96]		

880 SERIES

DIMENSION: PITCH .197in. [5mm]

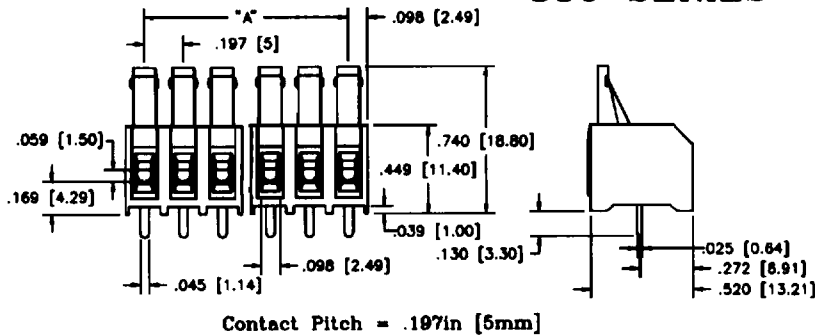

POLE	"A"	POLE	"A"
2	.197 [5]	14	2.559 [65]
3	.394 [10]	15	2.756 [70]
4	.591 [15]	16	2.953 [75]
5	.787 [20]	17	3.150 [80]
6	.984 [25]	18	3.346 [85]
7	1.181 [30]	19	3.543 [90]
8	1.378 [35]	20	3.740 [95]
9	1.575 [40]	21	3.937 [100]
10	1.772 [45]	22	4.134 [105]
11	1.969 [50]	23	4.331 [110]
12	2.165 [55]	24	4.528 [115]
13	2.362 [60]		

ORDERING INFORMATION

