881643-3 - ACTIVE

Multilock Connector System

TE Internal #: 881643-3 Housing for Male Terminals, Wire-to-Wire, 20 Position, Black, Signal, Cable Mount (Free-Hanging), Multilock Connector System View on TE.com >



Connectors > Automotive Connectors > Connector Housings > MULTILOCK, CONNECTOR HOUSING



Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1.8 mm [.071 in]

Connector System: Wire-to-Wire

Number of Positions: 20

Sealable: No

All MULTILOCK, CONNECTOR HOUSING (576)

Features

Product Type Features

Connector & Housing Shape	Circular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	20
Number of Rows	7
Electrical Characteristics	
Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V
Body Features	

S For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 20 Position, Black, Signal, Cable Mount (Free-Hanging), Multilock Connector System



Cable Exit Angle	180°
Body Material	PA
Primary Product Color	Black
Contact Features	
Contact Size	1.8mm
Contact Type	Tab
Mating Tab Width	1.8 mm[.071 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Dimensions	
Product Width	37.3 mm[1.468 in]
Product Length	44 mm[1.732 in]
Product Height	44 mm[1.732 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	252
Packaging Method	Box
Other	
Serviceable	Yes

C For support call+1 800 522 6752

08/03/2022 11:37AM | Page 2

Housing for Male Terminals, Wire-to-Wire, 20 Position, Black, Signal, Cable Mount (Free-Hanging), Multilock Connector System



Connector Position Assurance Capable

No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Multilock Connector System

Housing for Male Terminals, Wire-to-Wire, 20 Position, Black, Signal, Cable Mount (Free-Hanging), Multilock Connector System




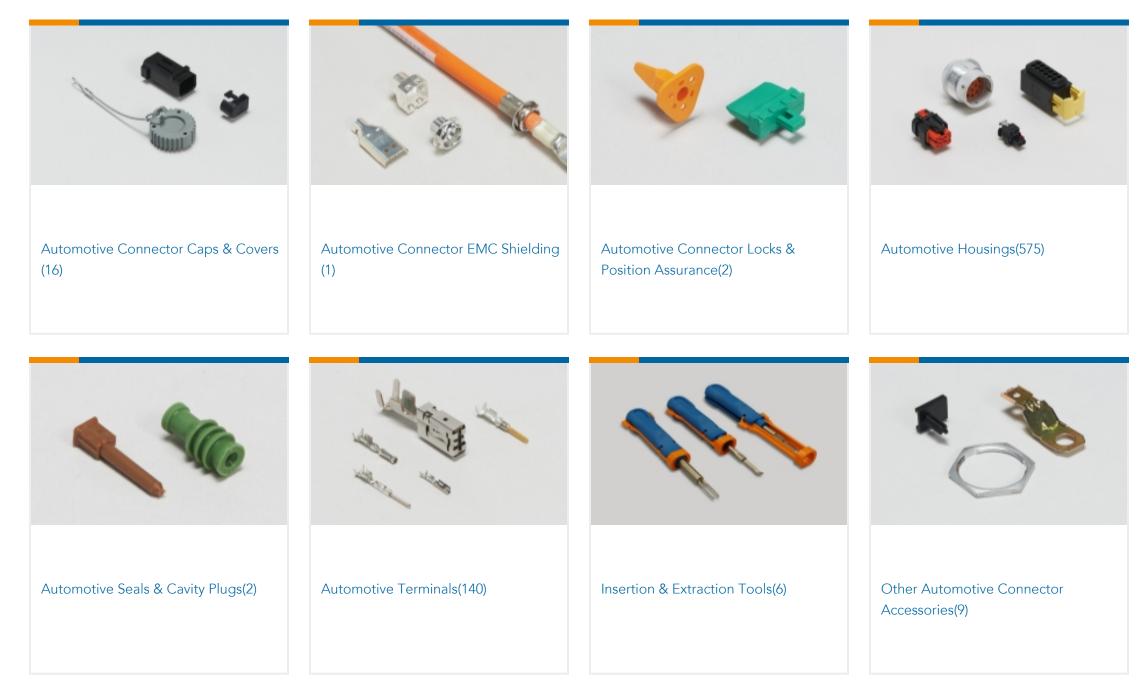



PCB Headers & Receptacles(129)

Customers Also Bought

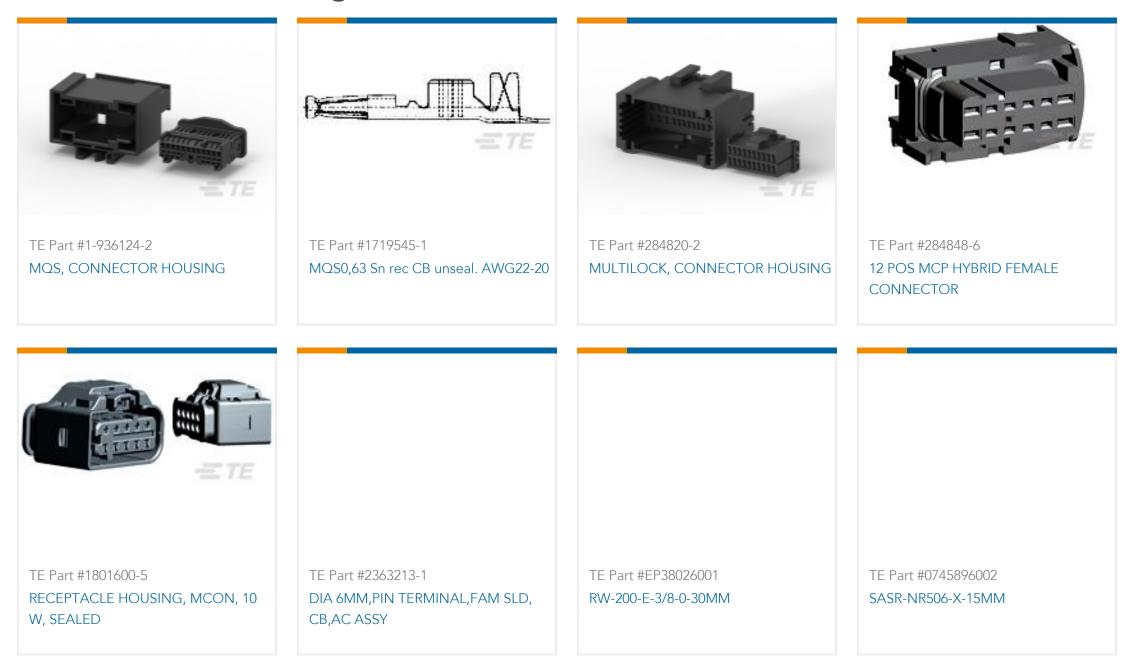

Documents

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 20 Position, Black, Signal, Cable Mount (Free-Hanging), Multilock Connector System



Product Drawings HSG ASSY MULTILOCK 20P TAB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_881643-3_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_881643-3_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_881643-3_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MULTILOCK Connector System

English