
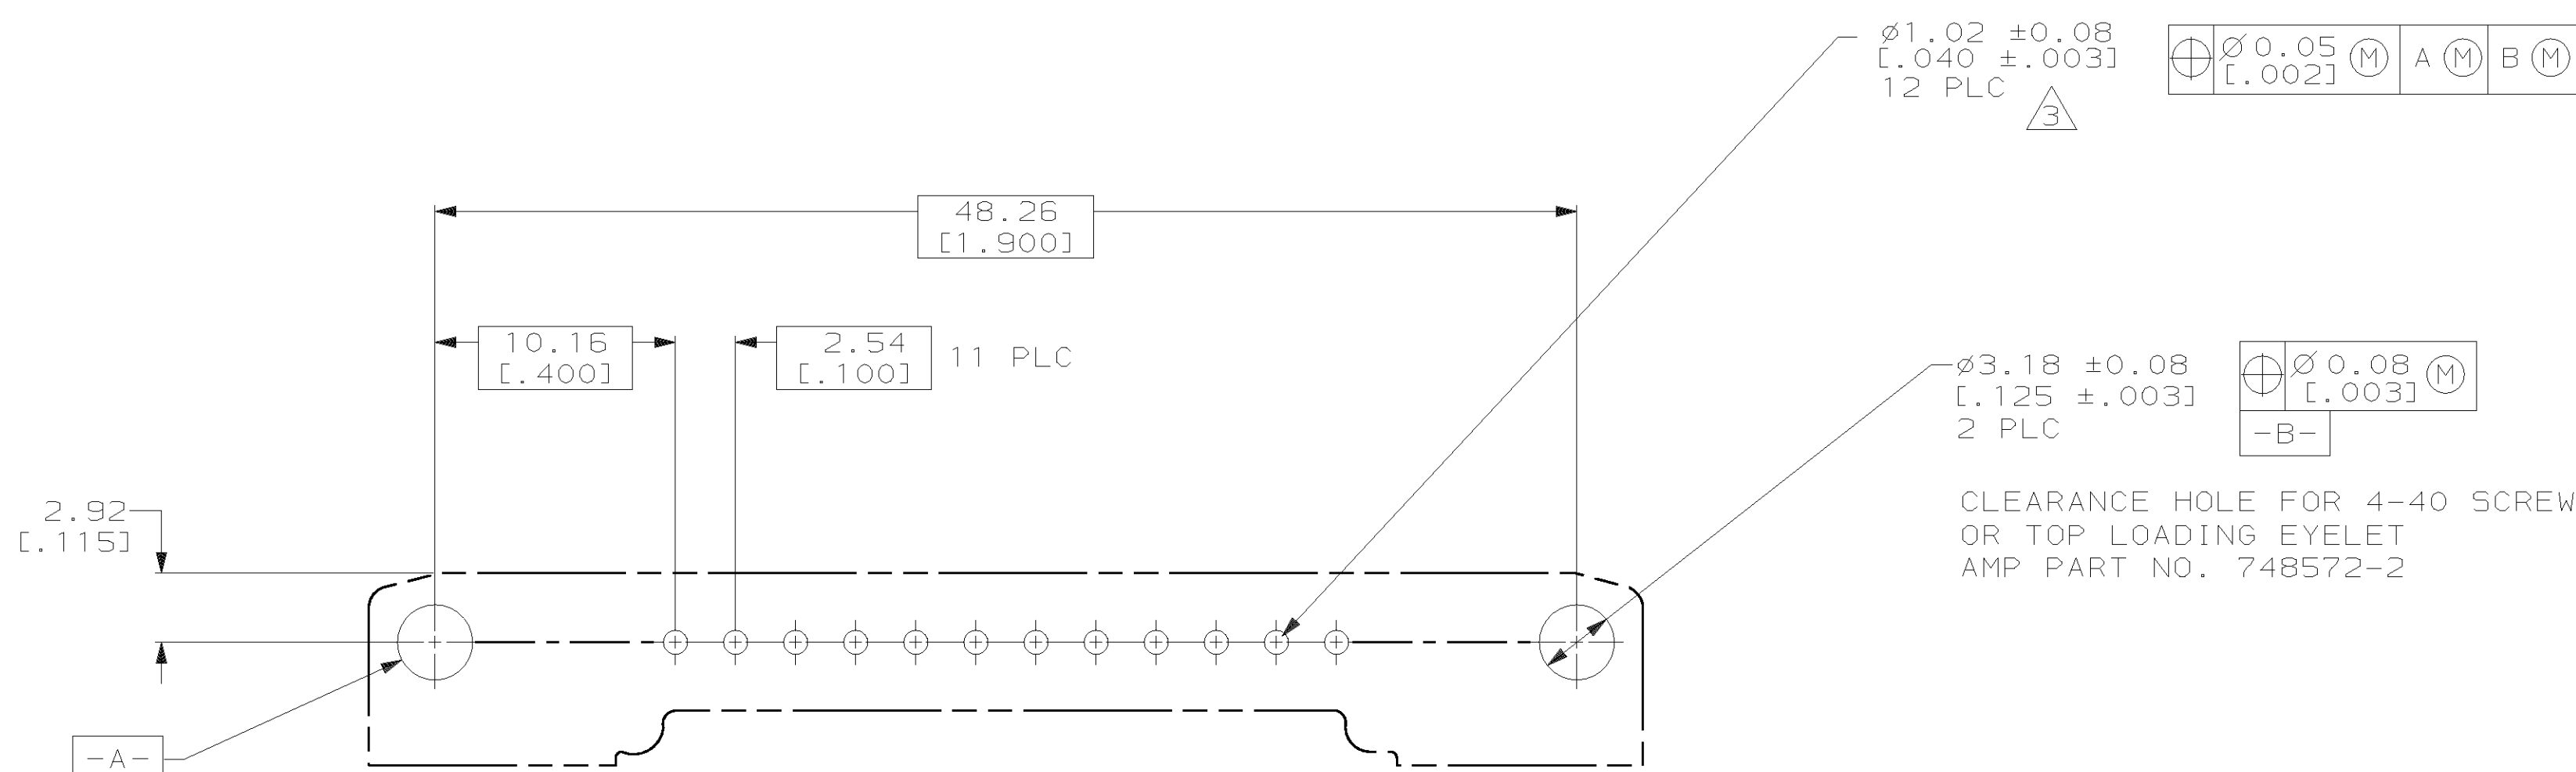
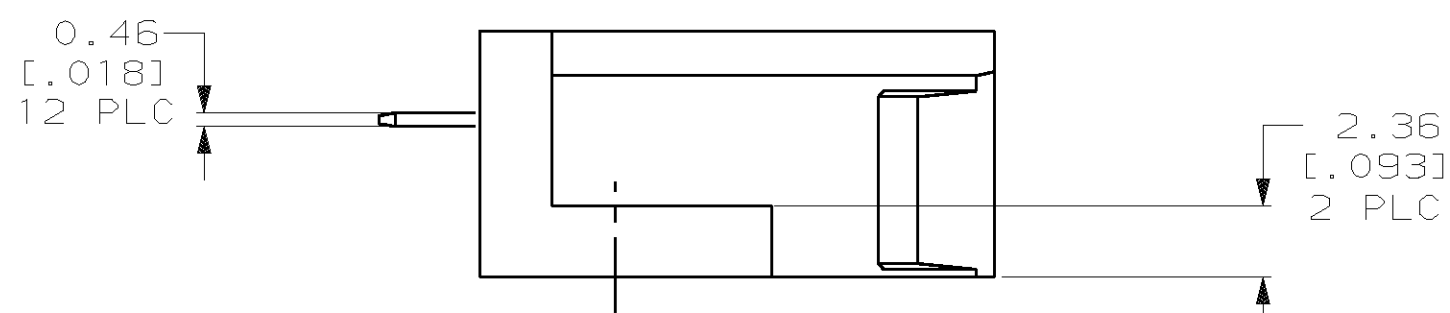
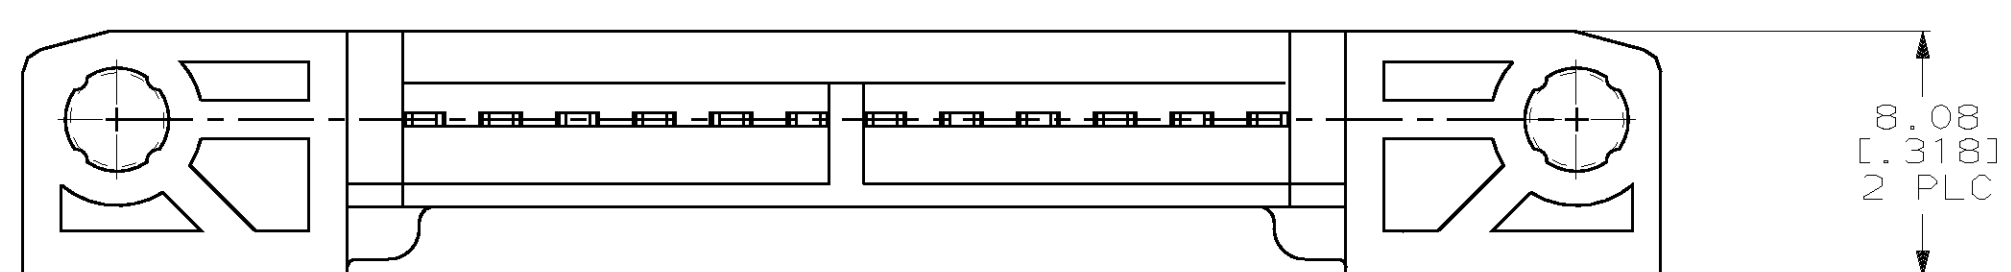
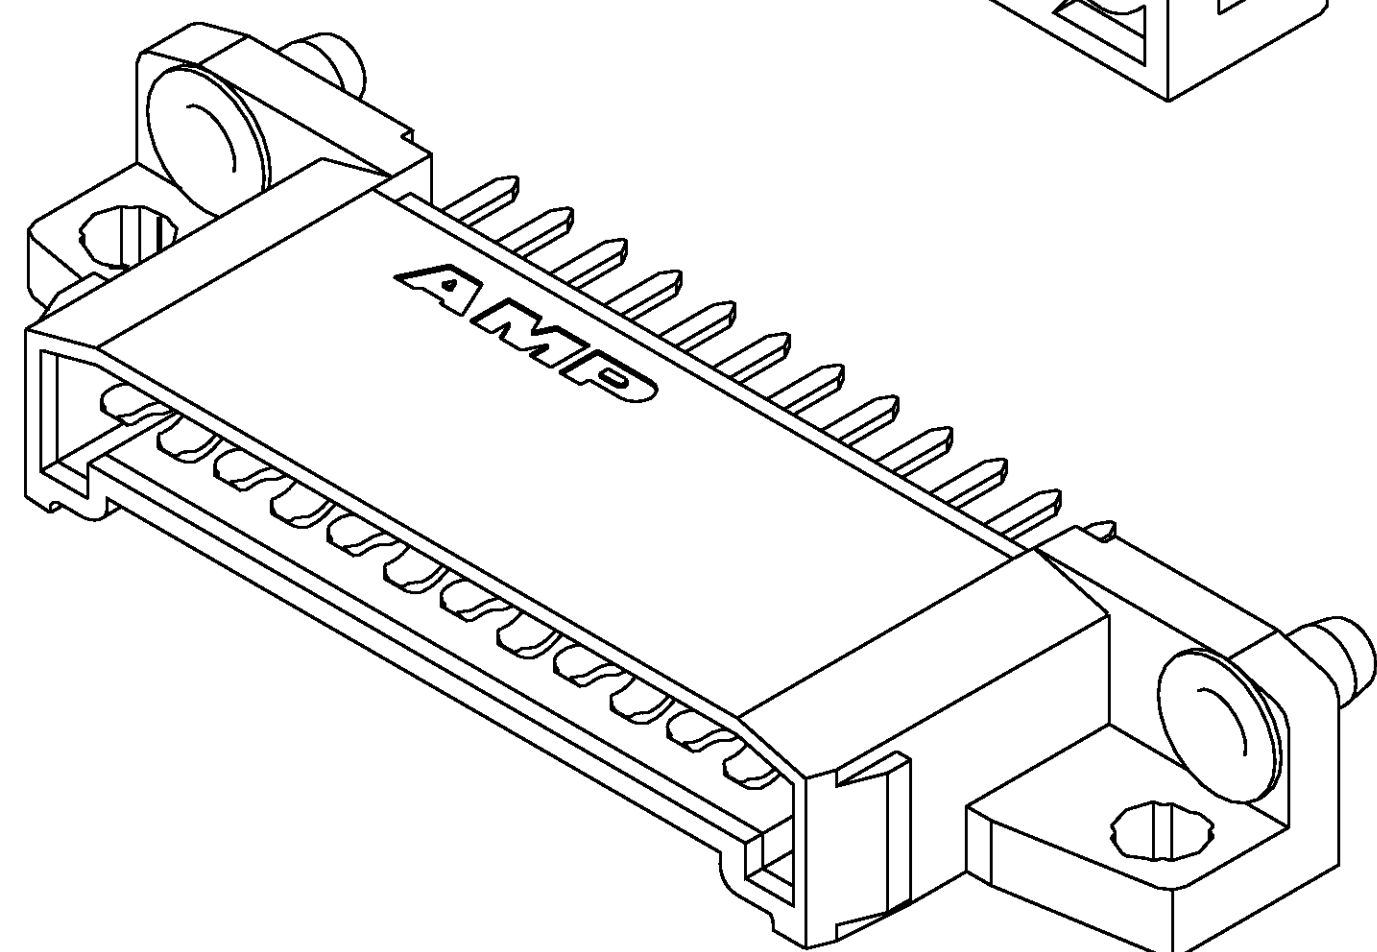
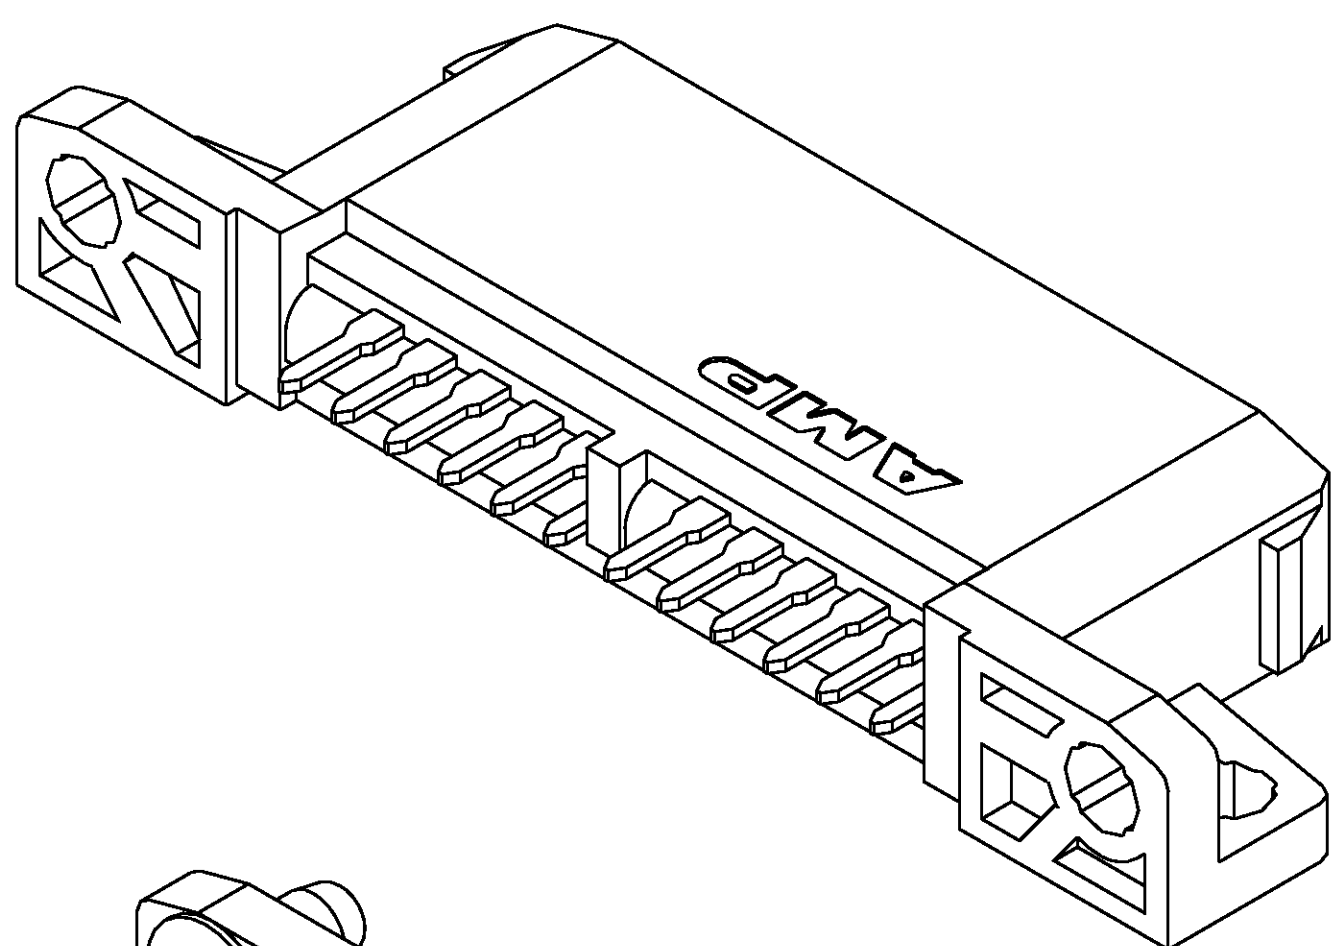


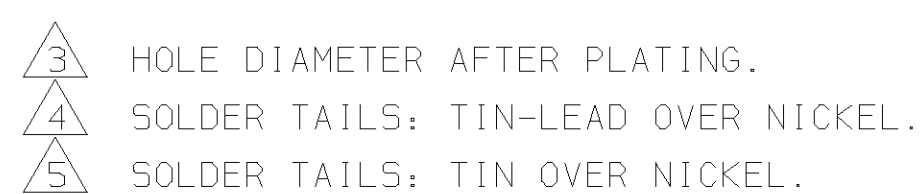

	WITH EYELETS			5.72 [.225]	1.57 [.062]	TO	4.75 [.187]	2-765206-2
	WITH EYELETS			4.19 [.165]	1.57 [.062]	TO	3.17 [.125]	2-765206-1
	WITH EYELETS			3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	2-765206-0
	W/O EYELETS			5.72 [.225]	1.57 [.062]	TO	4.75 [.187]	1-765206-9
	W/O EYELETS			4.19 [.165]	1.57 [.062]	TO	3.17 [.125]	1-765206-8
	W/O EYELETS			3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	1-765206-7
				5.72 [.225]			4.75 [.187]	1-765206-6
OBSOLETE				7.49 [.295]			6.35 [.250]	1-765206-5
	WITH EYELETS			4.19 [.165]			3.17 [.125]	1-765206-4
				3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	1-765206-3
				5.72 [.225]			4.75 [.187]	1-765206-2
OBSOLETE				7.49 [.295]			6.35 [.250]	1-765206-1
				4.19 [.165]			3.17 [.125]	1-765206-0
				3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	765206-9
				5.72 [.225]			4.75 [.187]	765206-8
OBSOLETE				7.49 [.295]			6.35 [.250]	765206-7
	W/O EYELETS			4.19 [.165]			3.17 [.125]	765206-6
				3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	765206-5
				5.72 [.225]			4.75 [.187]	765206-4
OBSOLETE				7.49 [.295]			6.35 [.250]	765206-3
				4.19 [.165]			3.17 [.125]	765206-2
				3.15 [.124]	1.57 [.062]	TO	2.36 [.093]	765206-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.25 [.01] 3 PLC DEC ± 0.13 [.005] ANGLES $\pm$	DR 12-08-89 J.K. DALY	AMP AMP INCORPORATED Harrisburg, Pa. 17105 AMPOWER Wave Crimp System VERTICAL HEADER ASSEMBLY 2.54 [.100] CENTERLINES				
	CHK 12-14-89 CMS					NAME
	APPD 12-14-89 GEB					
	APPD 12-14-89 JEL					
MATERIAL	PRODUCT SPEC 108-1308					
HOUSING: POLYESTER 1 2	FINISH	APPLICATION SPEC 114-49005	SIZE D	CAGE CODE 00779	DRAWING NO 765206	
POLYESTER - HIGH TEMP	SILVER ON MATING END, ALL OVER NICKEL.	WEIGHT -	SCALE 4:1	SHEET 1 OF 1		

CUSTOMER DRAWING