

968137-6 ✓ ACTIVE

AMP | Micro Power Quadlock


TE Internal #: 968137-6

Automotive Terminals, Tab, Mating Tab Width 2.8 mm [.11 in], Tab Thickness .024 in [.63 mm], 16 – 13 AWG Wire Size, Micro Power Quadlock

[View on TE.com >](#)



Terminals & Splices > Automotive Terminals > MQS, RECEPTACLE AND TAB

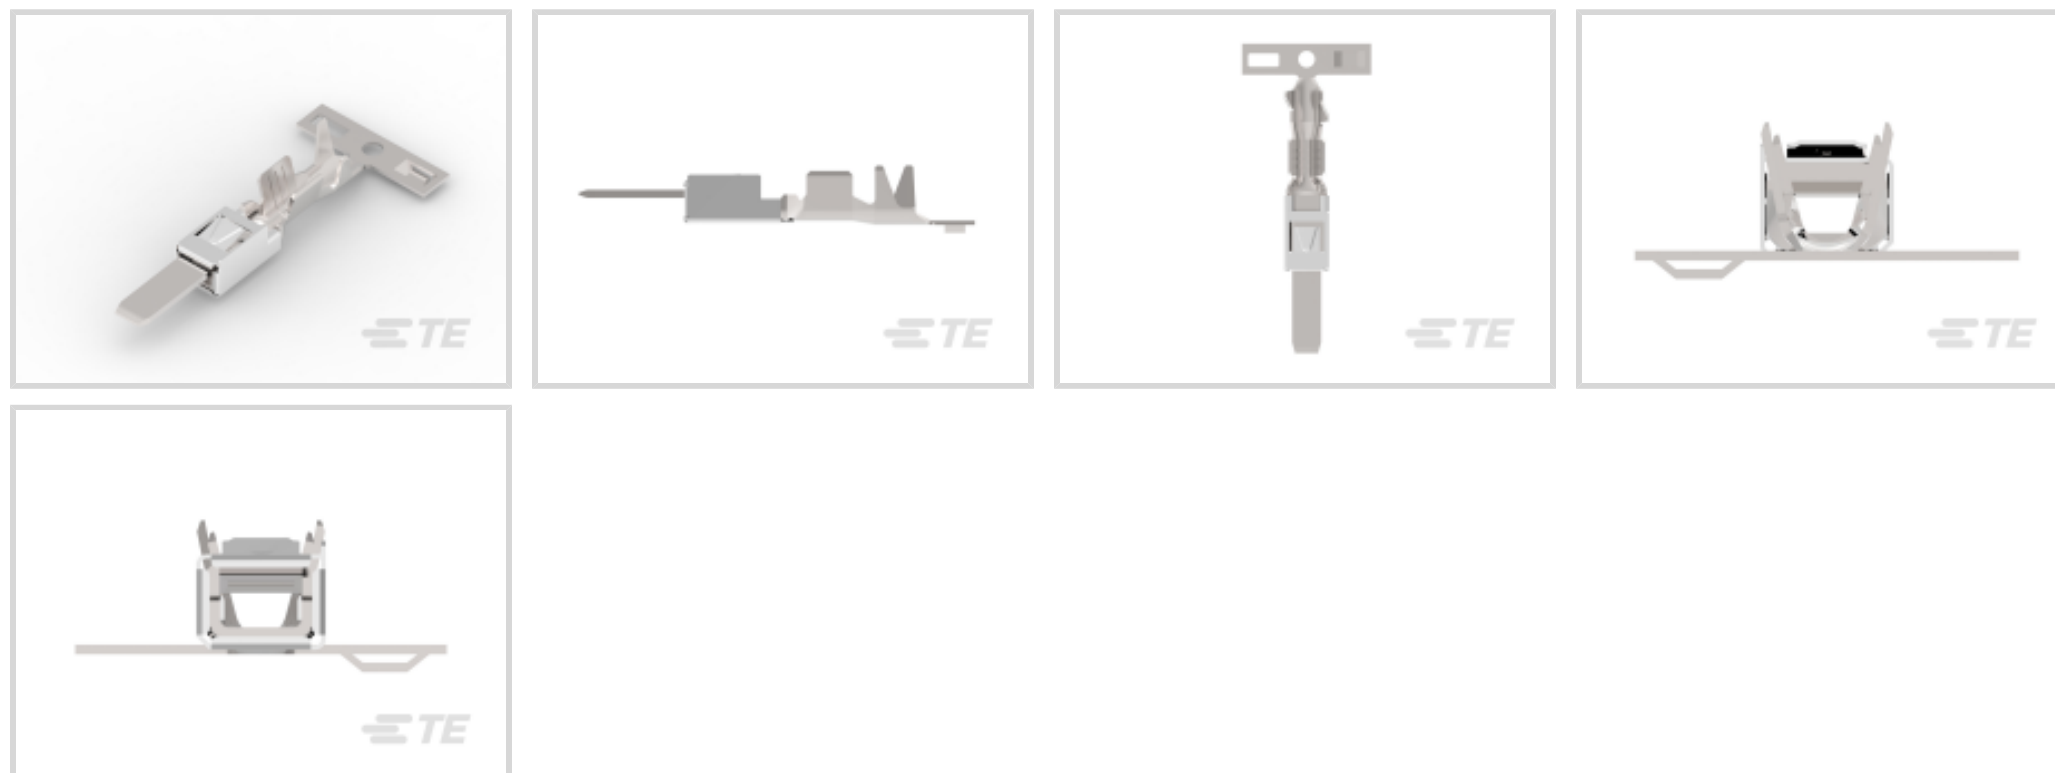

Terminal Type: **Tab**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.63 mm [.024 in]**

Terminal Transmits: **25 – 40 A (Power)**

Wire Size: **16 – 13 AWG**

[All MQS, RECEPTACLE AND TAB \(125\)](#)

## Features

### Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Locking Lance

### Contact Features

Contact Size	2.8mm
Contact Fabrication	Stamped & Formed
Typical Current Rating	34 A
Crimp Type	F-Crimp
Terminal Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.63 mm[.024 in]
Interface Plating	Silver (Ag)
Contact Termination Area Plating Material	Silver (Ag)



### Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire

### Dimensions

Wire Size	1.25 – 2.5 mm <sup>2</sup>
Wire Size Search	13 AWG, 14 AWG, 15 AWG, 16 AWG
Wire Insulation Diameter	1.9 – 3 mm [.075 – .118 in]

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C [176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 – 140 °C [-40 – 284 °F]

### Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

### Industry Standards

Agency/Standard	LV214
-----------------	-------

### Packaging Features

Packaging Method	Reel
Packaging Quantity	4000

### Other

Customer Preferred Contact	No
Terminal Transmits	25 – 40 A (Power)

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2017 (174)



SVHC > Threshold:  
Not Yet Reviewed

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## Compatible Parts



TE Part # 2305570-1  
TERMINAL CUTTER, SIDE FEED



TE Part # 968075-3  
MPQ2,8 Ag rec LL unseal. >1-2,5



TE Part # 6-1579007-3  
EXTRACTION TOOL




TE Part # 2-2151067-1  
OCEAN\_2.0\_APPLICATOR-S-100F140O



TE Part # 2-2151067-2  
OCEAN\_2.0\_APPLICATOR-S-100F140O




TE Part # 58590-1  
PROCRIMP TOOL W/DIE MPQ

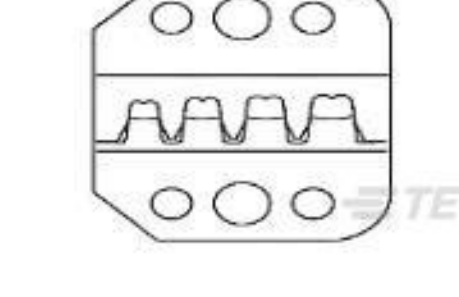


TE Part # 58590-2  
PROCRIMP DIE MPQ

Also in the Series | [Micro Power Quadlock](#)

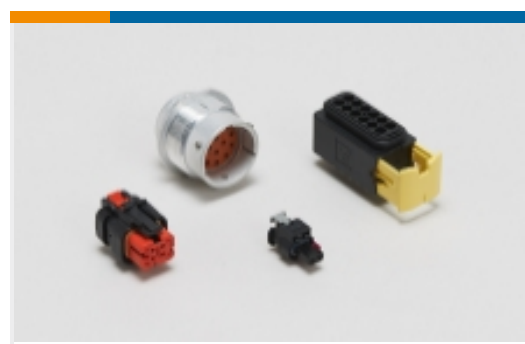


Automotive Housings(1)

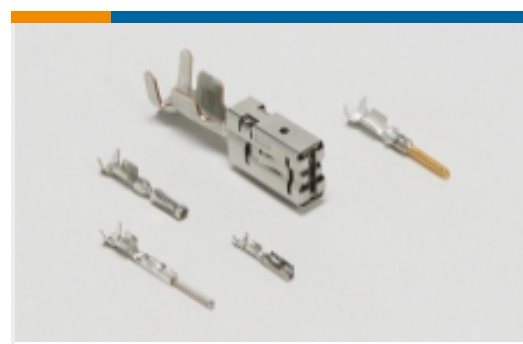

Automotive Terminals(16)



Insertion & Extraction Tools(1)

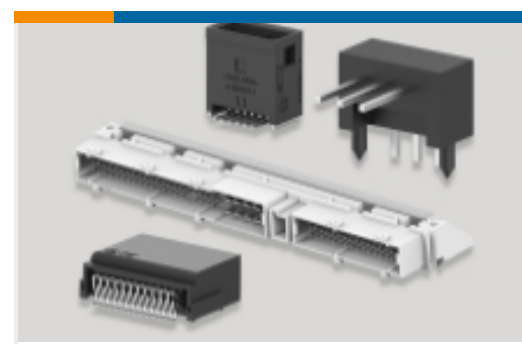


PCB Headers & Receptacles(2)


## Customers Also Bought




TE Part #1-1241418-3  
AMP MCP, RECEPTACLE AND TAB

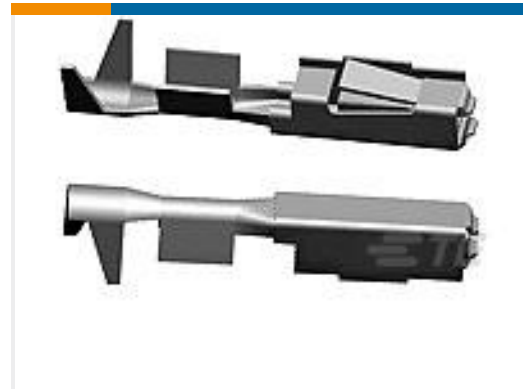

TE Part #968678-2  
MPO2,8 Sn rec LL unseal. 0,35-0,5

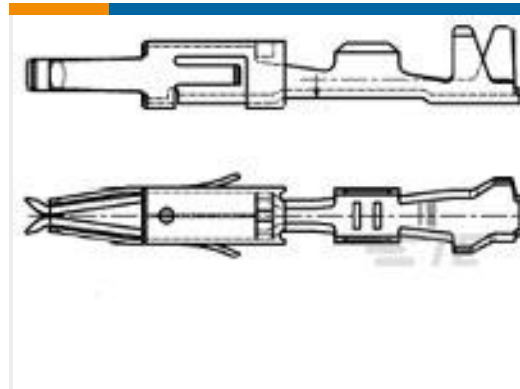

TE Part #965914-1  
MT3 REC 1.6 Contact SRC Au

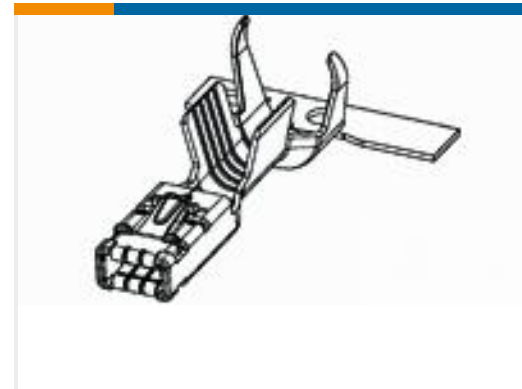

TE Part #1670804-3  
MCON 2.8 TERMINAL - LL



TE Part #929008-2  
MQS1MM BU-KONT 90GR



TE Part #1-962890-1  
TAB RECEPTACLE 0.5-1.0 MM2 PTPPHBZ



TE Part #1-962891-1  
FAST STECKHUELSE3,3



TE Part #1-962892-1  
FAST STECKHUELSE8,1



TE Part #1670854-3  
PQ5,2 Ag rec LL unseal. >4,0-6,0

## Documents

### Product Drawings

MPO2,8 Ag tab LL unseal. >1,0-2,5

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_968137-6\_C\_c-968137-6-c.2d\_dxf.zip



English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_968137-6\\_C\\_c-968137-6-c.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_968137-6\\_C\\_c-968137-6-c.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages

[Micro Quadlok Interconnection System \(MQS\)](#)

English