




## 926005-1 Product Details

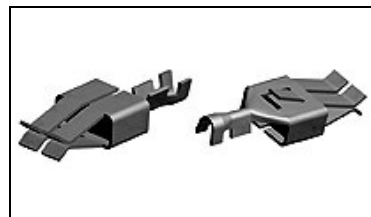

**926005-1**

TE Internal Number: 926005-1

Active

### Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Timer Products Product Line
- Standard Timer Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Documentation & Additional Information	
Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.	<b>Additional Information:</b> <ul style="list-style-type: none"> <li>• <a href="#">Product Line Information</a></li> </ul> <b>Related Products:</b> <ul style="list-style-type: none"> <li>• <a href="#">Tooling</a></li> </ul>

Product Features (Please use the Product Drawing for all design activity)	
<b>Product Type Features:</b> <ul style="list-style-type: none"> <li>• Product Line = Timer Products</li> <li>• <a href="#">Product Type</a> = Contact</li> <li>• Cable Type = FLK (Vehicle Cable Plastic)</li> <li>• Wire/Cable Type = Discrete Wire</li> <li>• Insulation Support = With</li> </ul> <b>Electrical Characteristics:</b> <ul style="list-style-type: none"> <li>• Contact - Rated Current (A) = 25</li> </ul> <b>Termination Features:</b> <ul style="list-style-type: none"> <li>• Wire/Cable Size (AWG) = 15 - 20</li> <li>• Wire/Cable Size (mm<sup>2</sup>) = 0.5 - 1.5</li> <li>• Termination Method to Wire/Cable = Crimp</li> </ul> <b>Dimensions:</b> <ul style="list-style-type: none"> <li>• Mating Area Interface Dimensions (mm [in]) = 4.80 x 0.80 [.189 x .031], 5.80 x 0.80 [.228 x .031], 6.30 x 0.80 [.248 x .031]</li> </ul> <b>Contact Features:</b> <ul style="list-style-type: none"> <li>• Contact Type = Socket</li> <li>• Contact Design = Standard Flat</li> <li>• Contact Base Material = CuZn30</li> <li>• Contact Plating, Mating Area, Material = Pre-Tin</li> </ul> <b>Configuration Features:</b> <ul style="list-style-type: none"> <li>• GET 0.64 Connector System = No</li> <li>• Single Wire Sealing System = No</li> </ul>	<b>Industry Standards:</b> <ul style="list-style-type: none"> <li>• <a href="#">RoHS/ELV Compliance</a> = RoHS compliant, ELV compliant</li> <li>• <a href="#">Lead Free Solder Processes</a> = Not relevant for lead free process</li> <li>• RoHS/ELV Compliance History = Always was RoHS compliant</li> <li>• Agency/Standard = IEC 664/664A (DIN VDE 0110)</li> </ul> <b>Environmental:</b> <ul style="list-style-type: none"> <li>• Operating Temperature (°C [°F]) = -40 - +110 [-40 - +230]</li> </ul> <b>Conditions for Usage:</b> <ul style="list-style-type: none"> <li>• Applies To = Wire/Cable</li> <li>• Accepts Wire Insulation Diameter, Range (mm [in]) = 2.00 - 3.00 [0.079 - 0.118]</li> </ul> <b>Operation/Application:</b> <ul style="list-style-type: none"> <li>• Application Use = Wire-to-Wire</li> <li>• Contact Transmits (Typical Application) = Power</li> </ul> <b>Packaging Features:</b> <ul style="list-style-type: none"> <li>• Packaging Method = Reel</li> <li>• Packaging Quantity = 2,500</li> </ul> <b>Other:</b> <ul style="list-style-type: none"> <li>• Series = Standard Timer</li> <li>• Brand = AMP</li> <li>• Comment = Refer to the application and product specification for additional information.; With reinforced locking latches.</li> </ul>

Feedback

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed



