

NOTES:

I - MATERIAL : PA66 25% GLASSFILLED, UL94V-0 COLOR BLACK.


2 - PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHERS REGULATIONS AS DESCRIBED IN GS-47-004.

4 - THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.

5 - INDICATES POS I, WHEN MATED WITH 95000 SERIE

6 - FOR USE WITH MINITEK CRIMP TO WIRE CONTACT 77138 (26-30AWG) OR 10044403 (22-24AWG)

7 - PRODUCT SPECIFICATION AS PER 110-036, CRIMP RECOMMENDATIONS AS PER GS-20-058

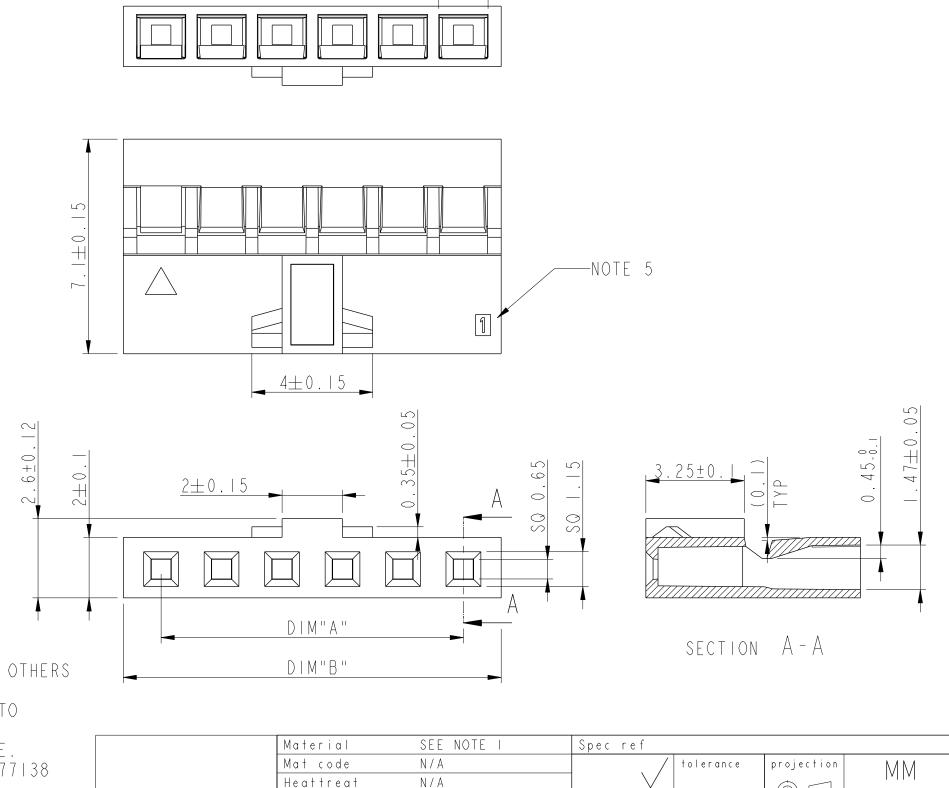

1.65±0.05

3

, , , , , , , , , , , , , , , , , , , ,							
			rev	ecn no	dr	date	Fn
			R	V08-0392	нтв	2008-09-12	C h
TOLERANCES UNLESS OTHERWISE SPECIFIED			S	FII-0047	JCO	2012-06-27	
			T	F12-0803	JCO	2012-09-03	Ар
	0.X	±0.3	U	B-21226	AMA	2015-06-24	
LINEAR	0.XX	±0.13	-	-	-	-	
	0.XXX	±0.050	-	-	-	-	

Plating/Finish

N/A

3

	Dr	D.WHI	LING	1991-02-15			size	Scale
	Eng	S.OLSON 1991-02-15		1991-02-15	Product family	MINITEK	A 3	8:1
27	Chr	J.COMF	PAGNON	11-04-04	Model Name	90312	ECN	
03	Appr	JCO		- 2 - 0	Model Revision		REL Level	proi_release
24	F	FS MINITEK CTW HSG.SGL ROW POLARIZING & LATCHING		o u	90312			
	Pro/	E file	catalo	g no		CUSTO)MER	I of I

 $\pm2^{\circ}$

0°

ANGULAR

2

PDS: Rev:B

STATUS:Released

4

Printed: Jul 03, 2015

 \oplus - \subseteq