


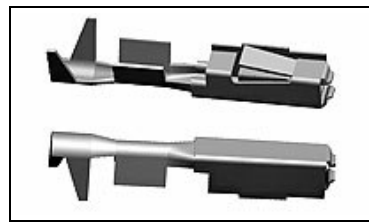

968075-5 Product Details

[Share](#) [Print](#) [Email](#)


968075-5

Micro-Power & Power Quadlok System

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Applies To Wire/Cable
- Contact
- Wire Range = 1.00-2.50² [17-13] mm [AWG]
- Wire/Cable Type = FLR (Thin Walled Cable)
- Wire Type = Stranded

[View all Features](#)
Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 968075-5

Active

[View 3D PDF](#)
[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • Micro Power Quadlok Tabellenzeichnung Buchsenkontakt... (PDF, English) • Buchsenkontakt SOCKET CONTACT (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • Allgemeine Crimpspezifikation / GENERAL CRIMP SPEC. (PDF, German) <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files: (CAD Format & Compression Information)</p> <ul style="list-style-type: none"> • 2D Drawing (DXF, Version B3) • 3D Model (IGES, Version B3) • 3D Model (STEP, Version B3) 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Contact • Wire/Cable Type = FLR (Thin Walled Cable) • Sealed = No • Locking Lance = With • Cable Type = FLR (Thin Walled Cable) <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Method to Wire/Cable = Crimp <p>Dimensions:</p> <ul style="list-style-type: none"> • Insulation Diameter (mm [in]) = 2.20-3.00 [.086-.118] <p>Body Features:</p> <ul style="list-style-type: none"> • Wire Range (mm [AWG]) = 1.00-2.50² [17-13] • Wire Type = Stranded <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Type = Receptacle • Contact Style = None • Contact Finish = Gold 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Applies To = Wire/Cable • Mates with Centerline = 5.08 x 5.08 [.200 x .200] <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Strip • Packaging Quantity = 4,000 <p>Other:</p> <ul style="list-style-type: none"> • Brand = AMP

[Feedback](#)

[Investors](#)

[News Room](#)

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility](#)

[Plan](#)

[Product Cross Reference](#)

[Documents & Drawings](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Find a Phone Number](#)

[Knowledge Base](#)

[Manage Your Account](#)

