



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Multiple Contact Types	Without
Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Socket

Termination Features



Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	Natural
Housing Material	PA 66

Dimensions

	.03 – .09 in
--	--------------

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Assembly Integration Feature	Without
Circuit Application	Power & Signal

Industry Standards

CSA Rating	Certified
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)
UL Rating	Recognized
Agency/Standard Number	E28476
CSA File Number	LR7189
VDE Tested	Yes
Agency/Standard	CSA, UL

Packaging Features

Packaging Method	Bag
Packaging Quantity	1200

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2022
(224)
Candidate List Declared Against: JAN 2022
(223)
SVHC > Threshold:
Not Yet Reviewed

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.


Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer










This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

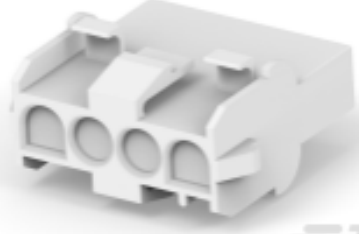 TE Part # 926298-3 04P UNIV.M-N-L.PLUG	 TE Part # 926298-6 UNML PLUG 4WAY	 TE Part # 1586845-1 04P UMNL CAP HSG NATL, GW	 TE Part # 926305-6 UNML4WAY CAP
 TE Part # 926305-7 4P UNIV M-N-L CAP	 TE Part # 2-480703-0 04P UMNL CAP HSG NATL	 TE Part # 794707-1 04P UMNL CAP HSG,BLACK	 TE Part # 643252-1 04P UMNL ASSY MOD HSG V0



Also in the Series | Universal MATE-N-LOK

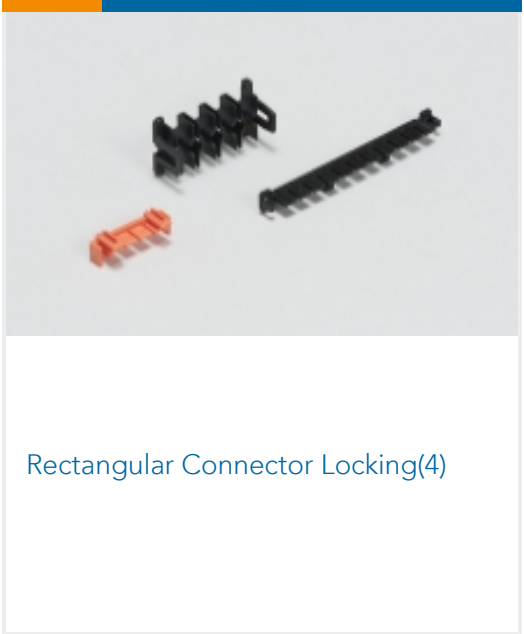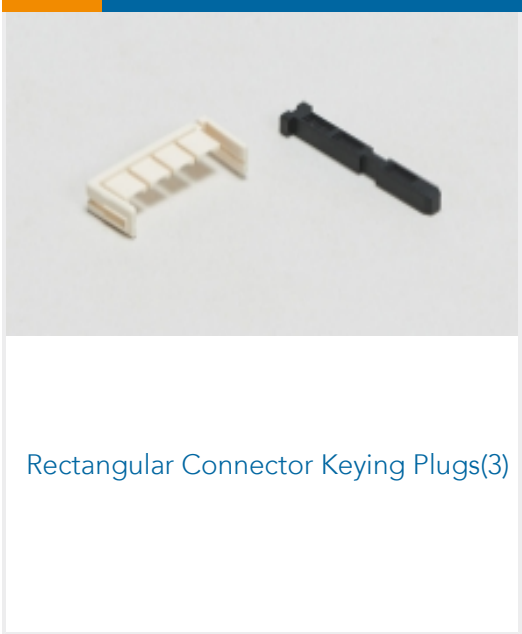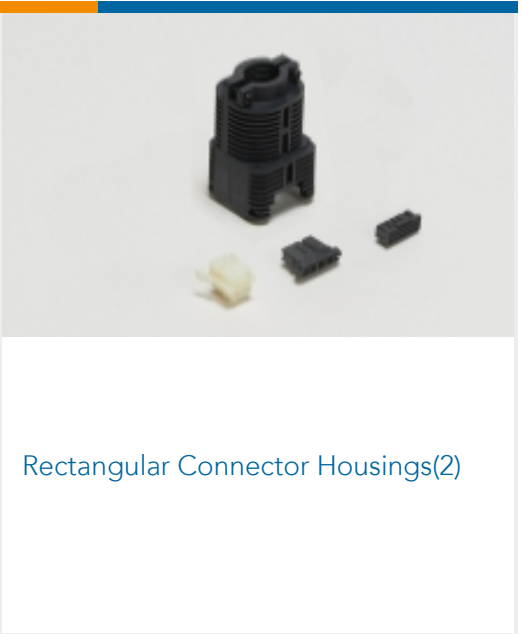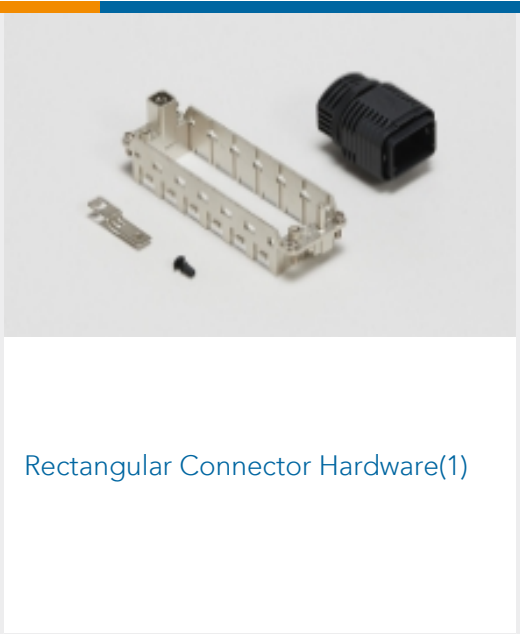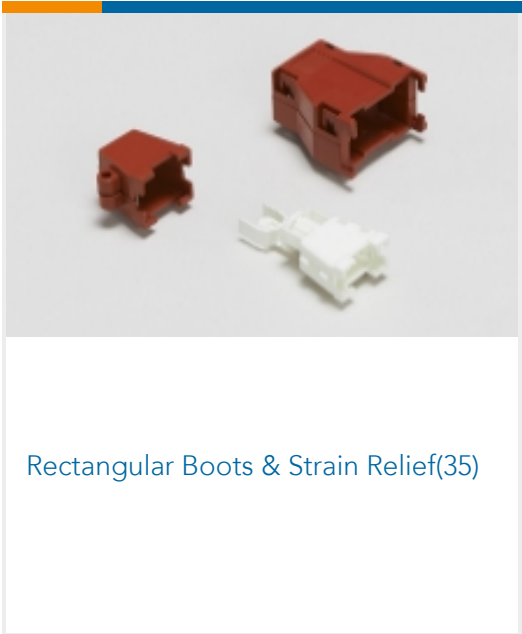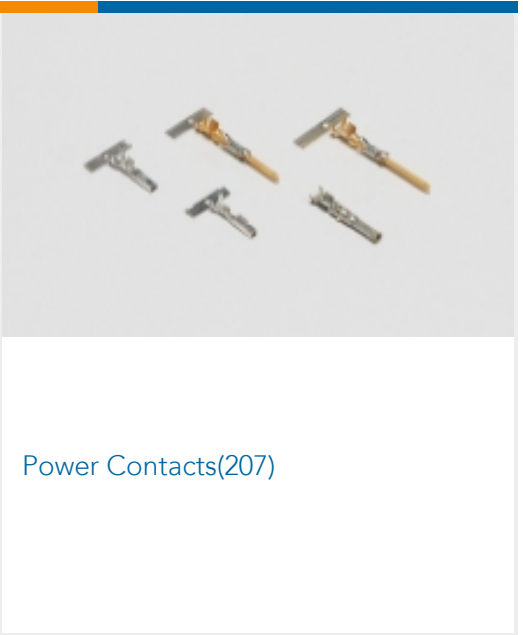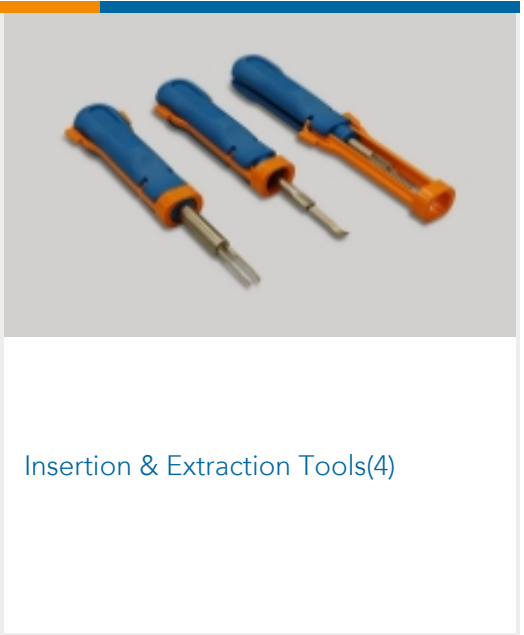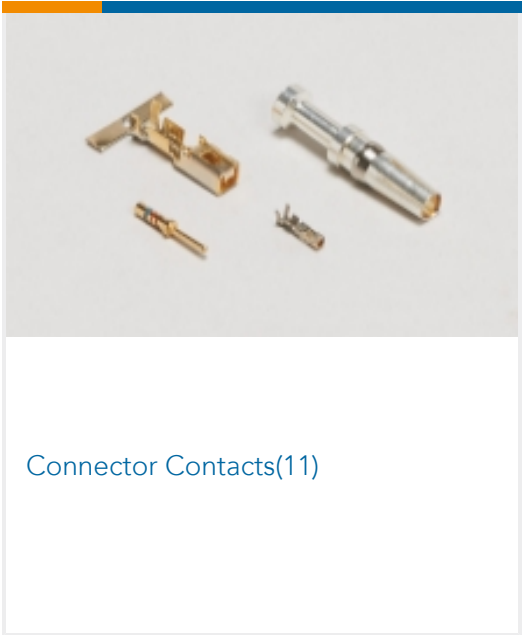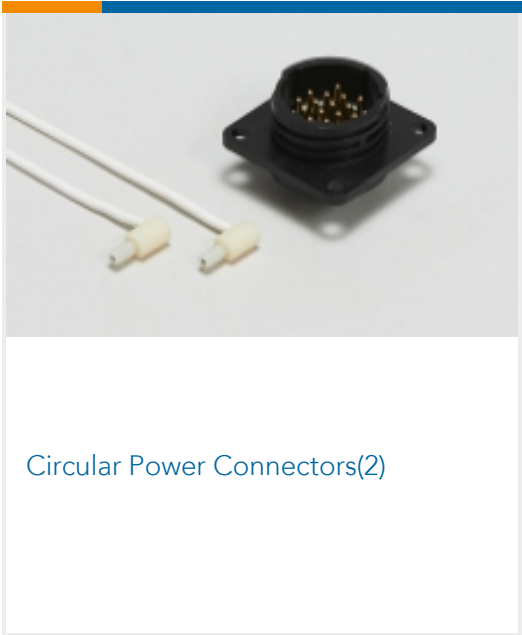

Customers Also Bought





TE Part #2315739-3 8POS,0.50,HDR ASSY,180DEG,COD C, HSL	TE Part #2315739-4 8POS,0.50,HDR ASSY,180DEG,COD D, HSL	TE Part #2326782-2 20POS,HYBRID,HDR ASSY,90DEG, SLDR	TE Part #2362662-1 8POS,0.50,HDR ASSY,90DEG,KEY-A, KEY-D
--	--	---	---

Documents

Product Drawings

UNIVERSAL MATE-N-LOK 4 WAY PLUG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_926298-7_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_926298-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_926298-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Glow Wire, V-0 Universal MATE-N-LOK Connector Housings Flyer

English

Product Specifications

Application Specification

German

Product Environmental Compliance

MD_926298-7_05152015257_dmtec

English

MD_926298-7_05152015257_dmtec

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

926298-7

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, .25 in [6.35 mm] Centerline, Wire & Cable, UL 94V-0, Universal MATE-N-LOK



VDE Certificate

English