


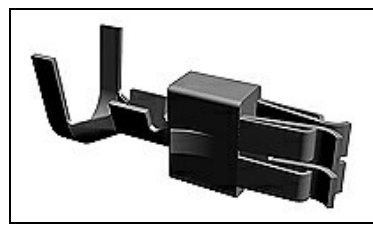

# 929923-1 Product Details

[Share](#) [Print](#) [Email](#)


**929923-1**

TE Internal Number: 929923-1

Active

[View 3D PDF](#)

## Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

### Product Highlights:

- Timer Products Product Line
- Standard Power-Timer Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

## Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

## Documentation & Additional Information

**Product Drawings:**

- [STANDARD POWER TIMER CONTACT Standard Power Timer Ko... \(PDF, English\)](#)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files: (CAD Format & Compression Information)**

- [2D Drawing \(DXF, Version C\)](#)
- [3D Model \(IGES, Version C\)](#)
- [3D Model \(STEP, Version C\)](#)

[List all Documents](#)

**Additional Information:**

- [Product Line Information](#)

**Additional Product Images:**

- [Line Drawing](#)

**Related Products:**

- [Tooling](#)

## Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- Product Line = Timer Products
- Product Type = Contact
- Cable Type = FLK (Vehicle Cable Plastic), FLR (Thin Walled Cable)
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

**Electrical Characteristics:**

- Contact - Rated Current (A) = 40

**Termination Features:**

- Wire/Cable Size (AWG) = 13 - 17
- Wire/Cable Size (mm<sup>2</sup>) = 1 - 2.5
- Termination Method to Wire/Cable = Crimp

**Dimensions:**

- Mating Area Interface Dimensions (mm [in]) = 4.80 x 0.80 [.189 x .031], 5.80 x 0.80 [.228 x .031], 6.30 x 0.80 [.248 x .031]

**Contact Features:**

- Contact Type = Socket
- Contact Design = Flat with Single Wire Sealing
- Contact Base Material = CuFe2
- Contact Plating, Mating Area, Material = Pre-Tin

**Configuration Features:**

- GET 0.64 Connector System = No
- Single Wire Sealing System = Yes

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- Agency/Standard = IEC 664/664A (DIN VDE 0110)

**Environmental:**

- Operating Temperature (°C [°F]) = -40 - +130 [-40 - +266]

**Conditions for Usage:**

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 2.20 - 3.00 [0.0866 - 0.118], 2.70 - 3.70 [0.106 - 0.145], 6.00 [0.236]

**Operation/Application:**

- Application Use = Wire-to-Wire
- Contact Transmits (Typical Application) = Power

**Packaging Features:**

- Packaging Method = Loose Piece
- Packaging Quantity = 500

**Other:**

- Series = Standard Power-Timer
- Brand = AMP
- Comment = Wire insulation diameter of 6.0 mm maximum would include wire seal.; One wire seal required per contact.; Refer to the application and product specification for additional information.; Insulation barrel pre-crimped.

Feedback

## Corporate Information

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

## Quick Links

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

## Customer Support

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

## Keep Me Informed

