953118-3 • ACTIVE


MQS

TE Internal #: 953118-3 PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > SIGNAL HEADER



Connector System: Wire-to-Board

Number of Positions: 40

Centerline (Pitch): 2.54 mm [.1 in]

Sealable: No

PCB Mount Orientation: Vertical

All SIGNAL HEADER (414)

Features

Product Type Features

Hybrid Header

No

Connector & Housing Shape

Rectangular

PCB Connector Assembly Type	PCB Mount Header				
Header Type	Fully Shrouded				
Connector System	Wire-to-Board				
Sealable	No				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Number of Sections	1				
Number of Signal Positions	40				
Number of Positions	40				
PCB Mount Orientation	Vertical				
Number of Rows	4				
Electrical Characteristics					
Nominal Voltage Architecture	12 V				
Operating Voltage	12 VDC				
Body Features					

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS



Primary Product Color	White
Connector Code	3
Contact Features	
Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Mating Area Plating Material	Tin (Sn)
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mounting Holes	Without
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Interface
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Length	32.5 mm[1.28 in]
Connector Width	25.9 mm[1.02 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	21.5 mm[.846 in]
Usage Conditions	
Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C[149 °F][15 °F][167 °F][176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Shielded	No
Circuit Application	Signal

PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS



Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Type	Tray
Packaging Quantity	432
Other	
Interface Number	208-15554
•	
Product Compliance For compliance documentation, visit the product page on TE.com>	
•	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	·
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS




TE Part # 953122-3 40W MQS COVER ASSY (15D)

Also in the Series | MQS

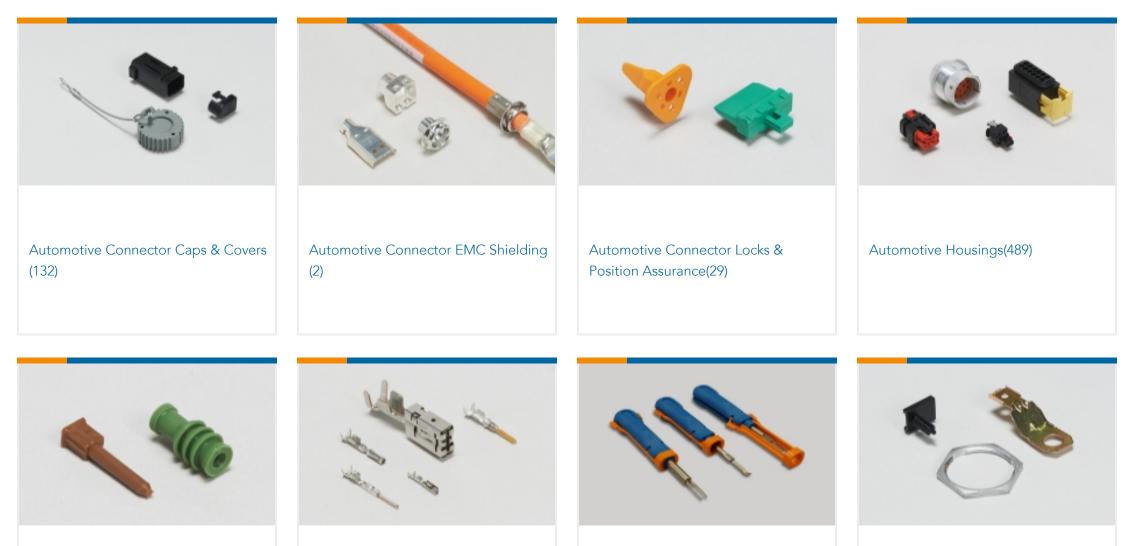

Automotive Seals & Cavity Plugs(26)	Automotive Terminals(96)	Insertion & Extraction Tools(42)	Other Automotive Connector
			Accessories(13)



PCB Headers & Receptacles(207)

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS



PIDER P ETE			
TE Part #8-1768044-6	TE Part #2007262-1	TE Part #2-1768407-3	TE Part #9541-040C-S-C-3-T
STD12W-EARTH	SFP+ 1x2 Cage Assembly, Light	LBG-STD09/7-COLOURED	PRESSURE I2C 0.6 PSIG SO16



Documents

Product Drawings

40pos MQS .63 header 180deg

French

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_953118-3_A_c-953118-3-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_953118-3_A_c-953118-3-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_953118-3_A_c-953118-3-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications EMBASE 40 VOIES SORTIES DROITES A SOUDER SUR CARTE IMPRIMEE

English

Product Specification

English

Product Environmental Compliance

Product Compliance

English

PCB Mount Header, Vertical, Wire-to-Board, 40 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, MQS



Product Compliance

English