




# 929938-3 Product Details

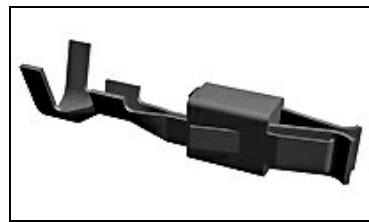

**929938-3**

TE Internal Number: 929938-3

**Active**

[View 3D PDF](#)

## Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

### Product Highlights:

- Timer Products Product Line
- Junior-Power-Timer (JPT) Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

## Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

## Documentation & Additional Information

### Product Drawings:

- [PRODUCT GROUP DRAWING FOR: JUNIOR POWER TIMER CONTACT \(TIF, German\)](#)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version A9\)](#)
- [3D Model \(IGES, Version A9\)](#)
- [3D Model \(STEP, Version A9\)](#)

[List all Documents](#)

### Additional Information:

- [Product Line Information](#)

### Additional Product Images:

- [Line Drawing](#)

### Related Products:

- [Tooling](#)

Feedback

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- Product Line = Timer Products
- Product Type = Contact
- Cable Type = FLK (Vehicle Cable Plastic), FLR (Thin Walled Cable)
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

### Electrical Characteristics:

- Contact - Rated Current (A) = 30

### Termination Features:

- Wire/Cable Size (AWG) = 13 - 17
- Wire/Cable Size (mm<sup>2</sup>) = 1 - 2.5
- Termination Method to Wire/Cable = Crimp

### Dimensions:

- Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x .031]

### Contact Features:

- Contact Type = Socket
- Contact Design = Flat, Steel Cantilever Spring
- Contact Base Material = CuSn4
- Contact Plating, Mating Area, Material = Pre-Tin
- Contact Plating, Mating Area, Thickness (µm [µin]) = 1 [39.37]

### Configuration Features:

- GET 0.64 Connector System = No
- Single Wire Sealing System = Yes

### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- Agency/Standard = DIN ISO 6722 part 1-3 (Old DIN 72551 Part 2), DIN 72 551 Part 5 and 6

### Environmental:

- Operating Temperature (°C [°F]) = -40 - +130 [-40 - +266]

### Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 2.20 - 3.00 [0.0866 - 0.118], 2.70 - 3.00 [0.106 - 0.118], 3.40 [0.134]

### Operation/Application:

- Application Use = Wire-to-Wire
- Contact Transmits (Typical Application) = Power

### Packaging Features:

- Packaging Method = Loose Piece
- Packaging Quantity = 1,000

### Other:

- Series = Junior-Power-Timer (JPT)
- Brand = AMP
- Comment = Wire insulation diameter of 3.4 mm maximum would include wire seal.; Insulation barrel pre-crimped.; Refer to the application and product specification for additional information.; One wire seal required per contact.

## Corporate Information

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

## Quick Links

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

## Customer Support

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

## Keep Me Informed

