

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.
Durability : 60 Cycles

Electrical


Voltage Rating: 25V
Current Rating: 0.5A
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 250V AC/1 min.
Insulation Resistance: 100MΩ

Physical


Housing: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -55°C to +85°C

DDR3 SO DIMM Socket

AS Series
5.2mm Height SMT Type
0.60mm Pitch
204 Pos.

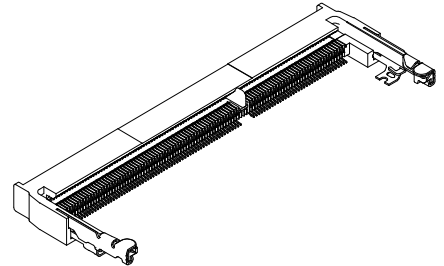

DRAWING

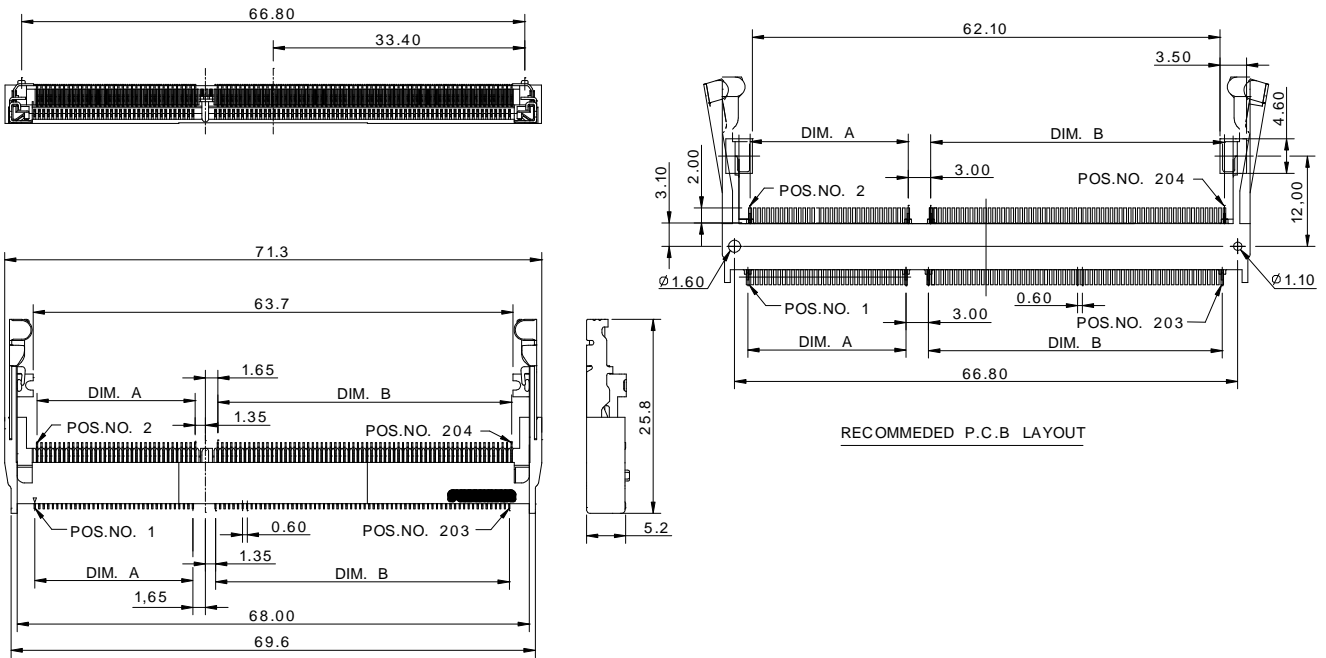

ORDERING INFORMATION

PRODUCT NO.: A S 0 A6 2 * - H 2 * 6 - * H

- Memory Module Socket
- Horizontal Type
- Single Row
- No. Of Pos.
A6=204 Pos.
- SMT Type
- Contact Area Plating
1=Gold Flash
Y=5u"Gold Plating
6=10u"Gold Plating
7=15u"Gold Plating
3=30u"Gold Plating
- H=HALOGEN /LEAD FREE
- Package Code
4=Soft Tray
7=Tape Reel
- 6=Normal Type
- S=Standard
R=Reverse
- 2=5.2mm Height
- H=DDR SODIMM

AS0A62*- H2S6- *H	21.00	39.00
AS0A62*- H2R6- *H	39.00	21.00
P/ N	DIM.A	DIM.B