

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.
Durability : 50 Cycles

Electrical


Voltage Rating: 50V
Current Rating: 0.5A
Contact Resistance: 55mΩ max.
Dielectric Withstanding Voltage: 300V AC/1 min.
Insulation Resistance: 100MΩ

Physical


Housing: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -55°C to +80°C

MINIPCI EXPRESS Socket

AS Series
4.0mm Height SMT Type
0.80mm Pitch
52 Pos.

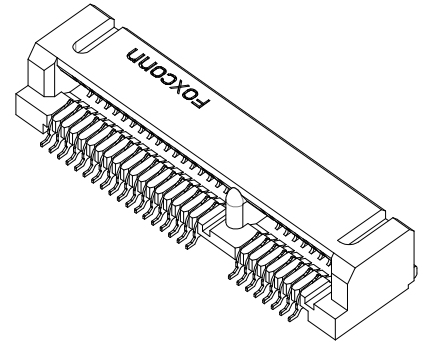

DRAWING

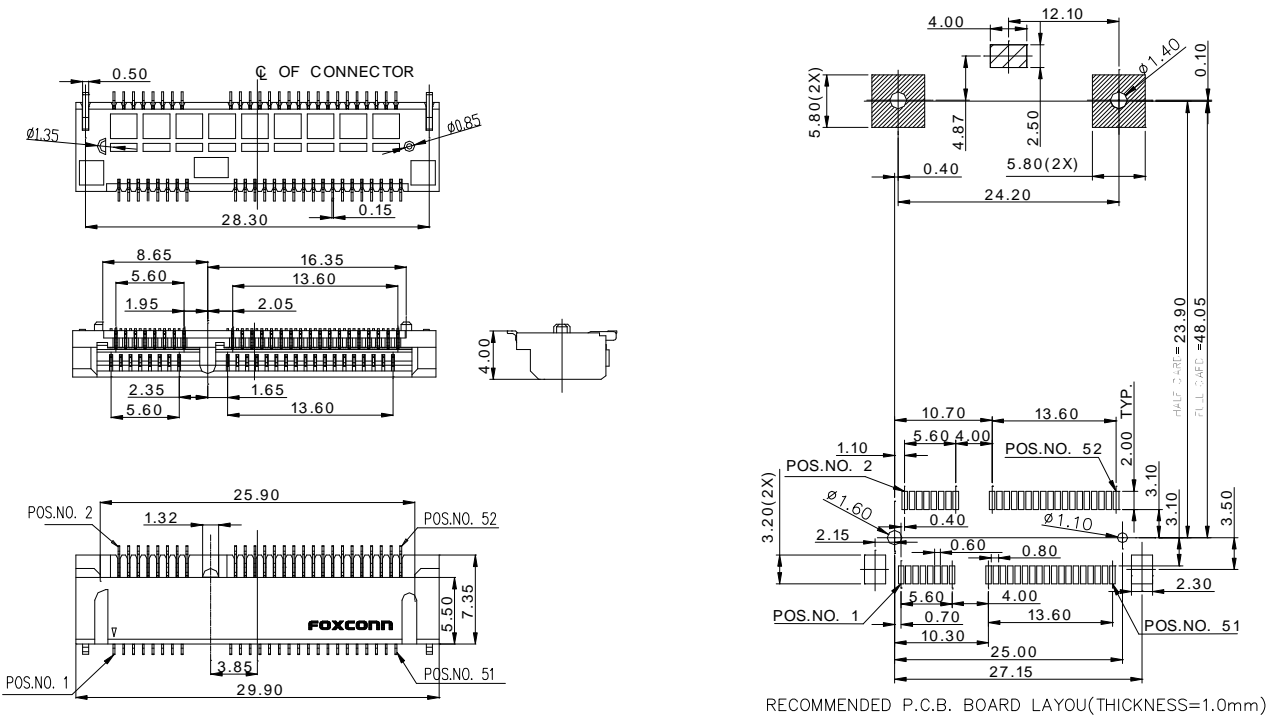

ORDERING INFORMATION

PRODUCT NO.: **A S 0 B2 2 * - S 40 Q - 7 H**

- Memory Module Socket
- Horizontal Type
- Single Row
- No. of Pos.
B2=52Pos.
- SMT Type
- Contact Area Plating
1=Gold Flash
6=10u" Gold plating
- H=Halogen /Lead Free
- Package Code
7=Tape Reel
- Q=General Type
- 40=4.0mm Height
- S=Standard Type