




Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

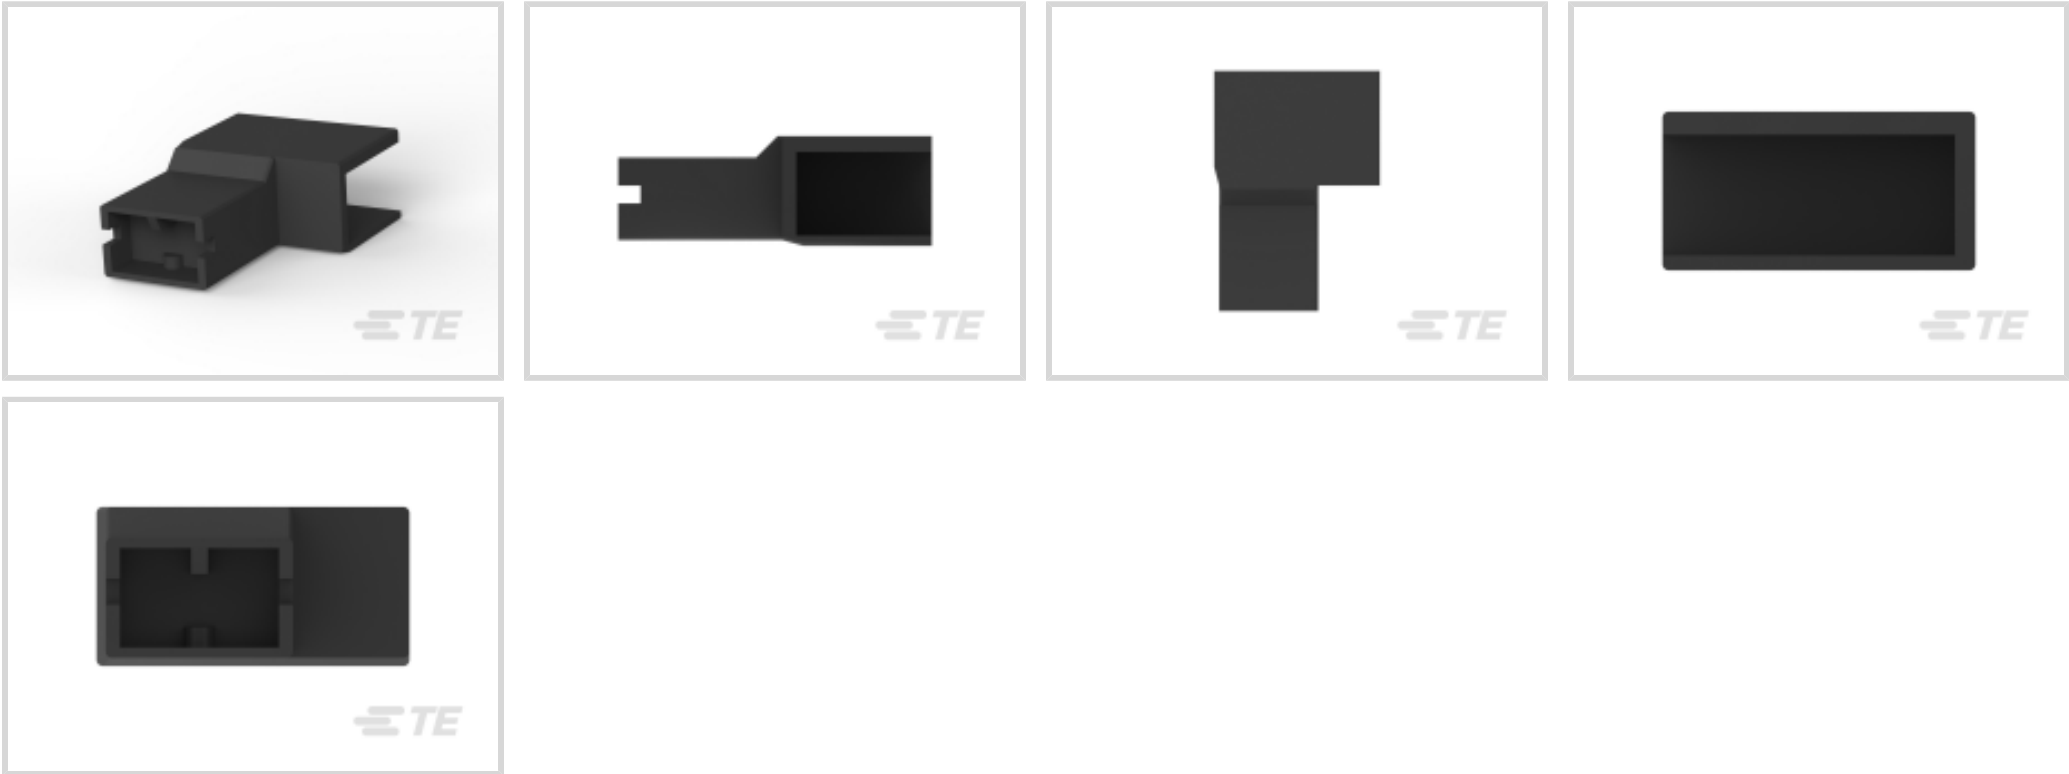

Terminal Type: **Receptacle**
Housing Type: **Receptacle**
Number of Positions: **1**
Terminal Orientation: **Flag**
UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Terminates To	Wire & Cable
Product Type	Terminal Housing
Sealable	No
Connector System	Wire-to-Wire
Housing Type	Receptacle
Insulated	No

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Flag
Contact Mating Retention	With



Mechanical Attachment

Mating Alignment Type	Polarization
Mating Alignment	With
Crimp Terminal Housing Mounting Style	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Method	Carton
------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 926790-6
PL 250 REC TERMINAL-FLAG 17-13
TPBR

TE Part # 926820-4
PL 250 FLAG REC 0.5-1.5 MM2 0.4X.44
PTP

TE Part # 927422-1
POSITIVE LOCK 3P HOUSING PA6.6
BLACK

Also in the Series | Positive Lock 250

Automotive Terminals(1)

Crimp Terminal Housings(203)

Insertion & Extraction Tools(3)

Insulation Boots & Sleeves(4)

Quick Disconnects(189)

Customers Also Bought

TE Part #2272431-1
GET .64 CONNECTOR SYSTEM,
CONNECTOR HSG

TE Part #3-2308295-1
1POS,PCON12,REC HSG,90 DEG,
UNSLD,COD C

TE Part #963892-1
STECKHUELSE 6,3

TE Part #2098067-7
Plug Assembly, Hybrid, BCM, CL, G
Key



TE Part #2133662-1
REC CONN CVR ASSY,64POS,MQS

TE Part #D58196-000
FL2500-NO.2-I9-0-50MM

TE Part #NB09416001
ATUM-16/4-0-40MM

TE Part #1746816-1
0.64/2.3II SEALED CONNECTOR
126POS WIRE

TE Part #2819105-1
HSG FEMALE ASSY 64 WAYS

Documents

Product Drawings

PL 250 HOUSING FLAG PA 6.6 BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_926291-1_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_926291-1_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_926291-1_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Positive Lock Receptacles

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

926291-1

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Flag, UL 94V-2, Black, Polyamide 6.6, Contact Mating Retention, Positive Lock 250

