




AMP | Standard Timer

TE Internal #: 969036-4

Automotive Terminals, Receptacle, Mating Tab Width 5.8 mm / 6.3 mm [.228 in / .248 in], Tab Thickness .031 in [.8 mm], Standard Timer

[View on TE.com >](#)

Terminals & Splices > Automotive Terminals > TIMER, RECEPTACLE AND TAB

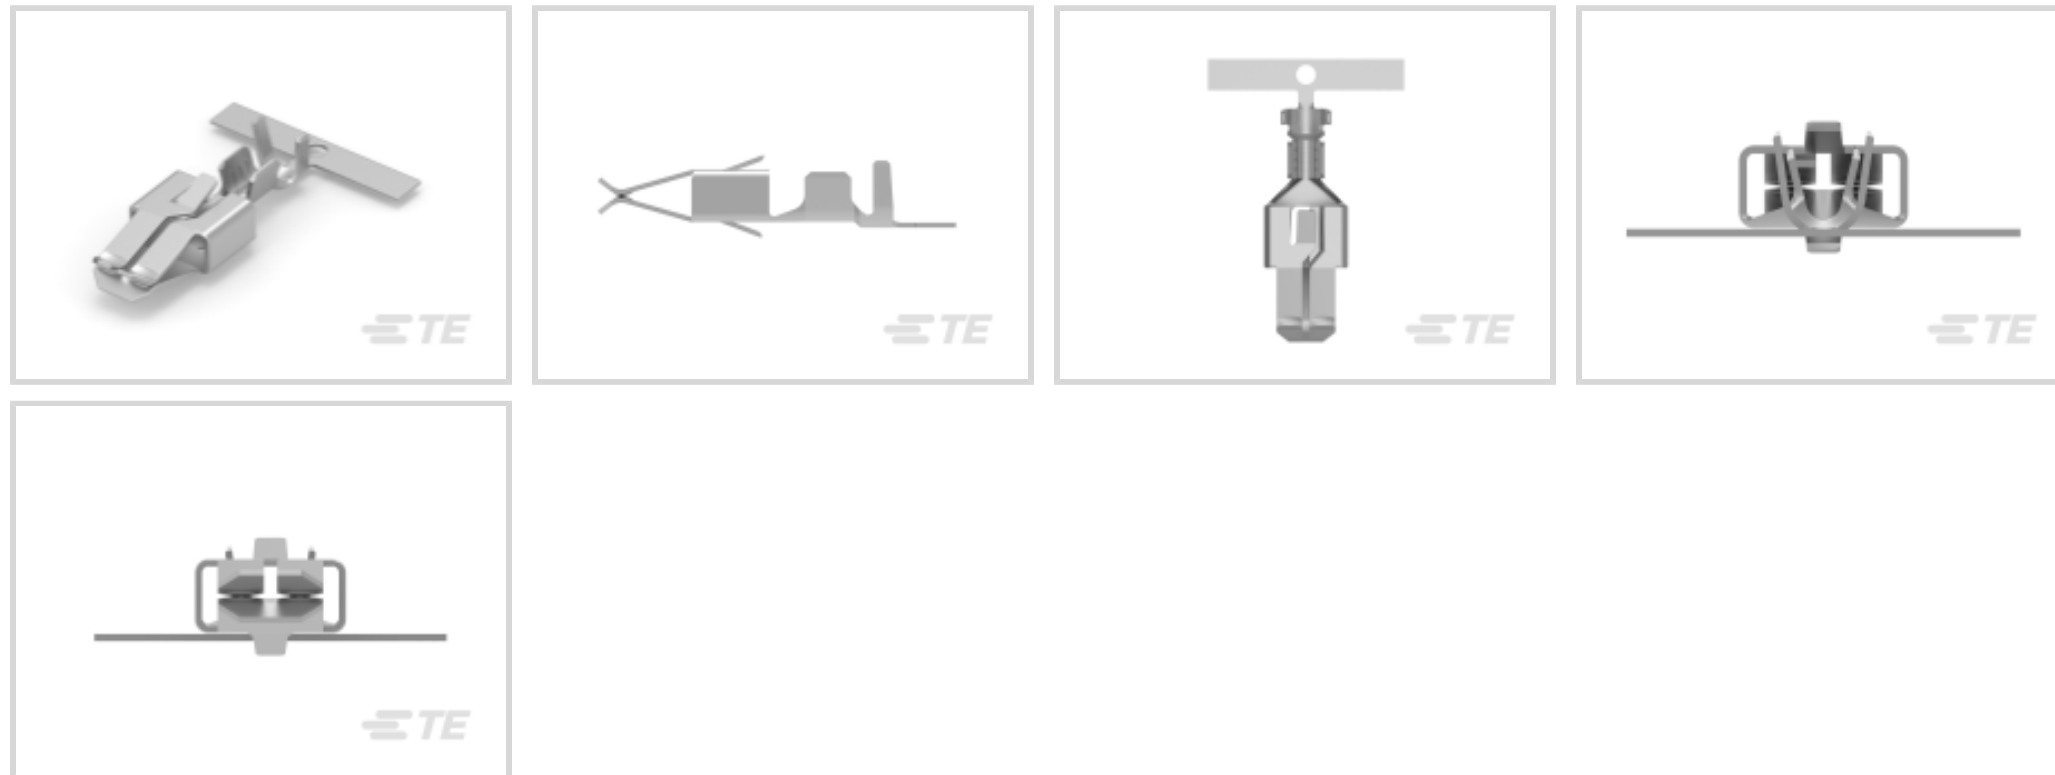

Terminal Type: **Receptacle**

Mating Tab Width: **5.8 mm, 6.3 mm [.228 in, .248 in]**

Mating Tab Thickness: **.8 mm [.031 in]**

Terminal Transmits: **25 – 40 A (Power)**

Wire Size: **20 – 15 AWG**

[All TIMER, RECEPTACLE AND TAB \(344\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Locking Lance

Contact Features

Contact Size	4.8mm
Contact Fabrication	Stamped & Formed
Typical Current Rating	25 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	5.8 mm, 6.3 mm [.228 in][.248 in]
Mating Tab Thickness	.8 mm [.031 in]
Interface Plating	Tin (Sn)
Contact Termination Area Plating Material	Tin (Sn)



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire

Dimensions

Wire Size	.5 – 1.5 mm ²
Wire Size Search	15 AWG, 16 AWG, 17 AWG, 18 AWG, 19 AWG, 20 AWG
Wire Insulation Diameter	2 – 3 mm [.079 – .118 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C [176 °F][185 °F][194 °F][212 °F][221 °F][230 °F]
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Agency/Standard	IEC 664/664A (DIN VDE 0110)
-----------------	-----------------------------

Packaging Features

Packaging Method	Reel
Packaging Quantity	2000

Other

Terminal Transmits	25 – 40 A (Power)
--------------------	-------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 2305570-1 TERMINAL CUTTER, SIDE FEED</p>	 <p>TE Part # 2-2151261-1 OCEAN_2.0_Applicator-S-090F140F</p>	 <p>TE Part # 2-2151261-2 OCEAN_2.0_Applicator-S-090F140F</p>	 <p>TE Part # 2151261-1 OCEAN_2.0_Applicator-S-090F140F</p>
 <p>TE Part # 2151261-2 OCEAN_2.0_Applicator-S-090F140F</p>	 <p>TE Part # 7-2151261-1 OCEAN_2.0_Applicator-S-090F140F</p>	 <p>TE Part # 7-2151261-2 OCEAN_2.0_Applicator-S-090F140F</p>	 <p>KIT REPRESENTATION ONLY</p> <p>TE Part # 7-2151261-7 OCEAN_2.0_SPARE_PART_KIT-090F140F</p>

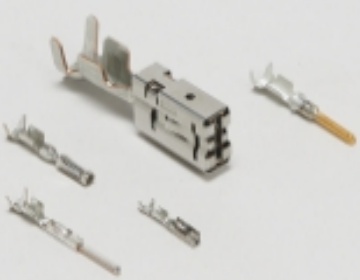Also in the Series | Standard Timer

 <p>Automotive Terminals(10)</p>	 <p>Plug & Socket Lighting Connectors(2)</p>	 <p>Wire-to-Board Connector Assemblies & Housings(12)</p>
---	---	--

Customers Also Bought



TE Part #1744416-9
9 POS EP II HSG, GLOW WIRE




TE Part #1747416-2
DYNAMIC D4200 TAB CONT L



TE Part #1969688-2
PTL 1X2 PCB HEADER VERT STDTMP
KEY A NAT




TE Part #170002-4
SHUR PLUG 20-14 AWG 0.5 X 11.44
TPBR

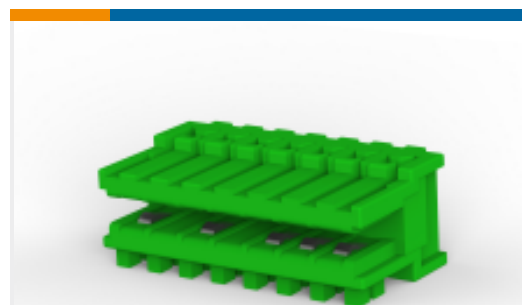

TE Part #2-284931-7
DUOPLUG Standard, female conn.




TE Part #284932-4
DUOPLUG MKI STD,KEYED 1/2,4
POS, ORANGE

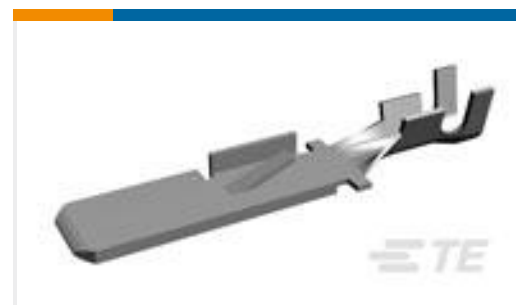

TE Part #969031-2
POS-MATE FLA-STE5,2



TE Part #293153-3
DUOPLUG 2.5 STD KEYED CTCS
SELEC. LOADED

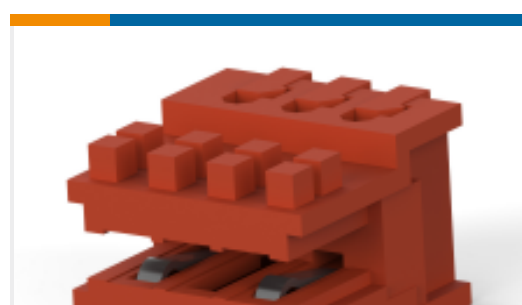

TE Part #4-284931-3
DUOPLUG Standard, female conn.

Documents

Product Drawings

STD TIMER CONTACT

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_969036-4_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_969036-4_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_969036-4_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

Timer Interconnection System

English

Product Specifications

Application Specification

English

Application Specification

English