

DEUTSCH | DEUTSCH DT TE Internal #: DT04-6P-CE01 Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >





Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 9.12 mm [.359 in]

All DEUTSCH DT Series Housings & Connectors (461)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals



Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Modification	End Cap
Connector Seal Code	E Seal
Number of Positions	6
Number of Rows	3
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	

S For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Cable Exit Angle	180°
Body Material	PAGF
Primary Product Color	Gray
Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Mounting Feature	With
Mounting Feature Terminal Position Assurance	With Yes
Terminal Position Assurance	Yes
Terminal Position Assurance Strain Relief	Yes Add By Accessory
Terminal Position Assurance Strain Relief Mating Alignment Type	Yes Add By Accessory Polarized
Terminal Position Assurance Strain Relief Mating Alignment Type Mating Alignment	Yes Add By Accessory Polarized With

Centerline (Pitch)

9.12 mm[.359 in]

Dimensions

Product Width	20.83 mm[.82 in]
Product Length	47.19 mm[1.868 in]
Product Height	24.69 mm[.972 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Accepts Wire Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	12mm Flame Test per Standard UL-94

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Features

Packaging Quantity	500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed

Halogen Content

Not Low Halogen - contains Br or Cl > 900

ppm.

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts


Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



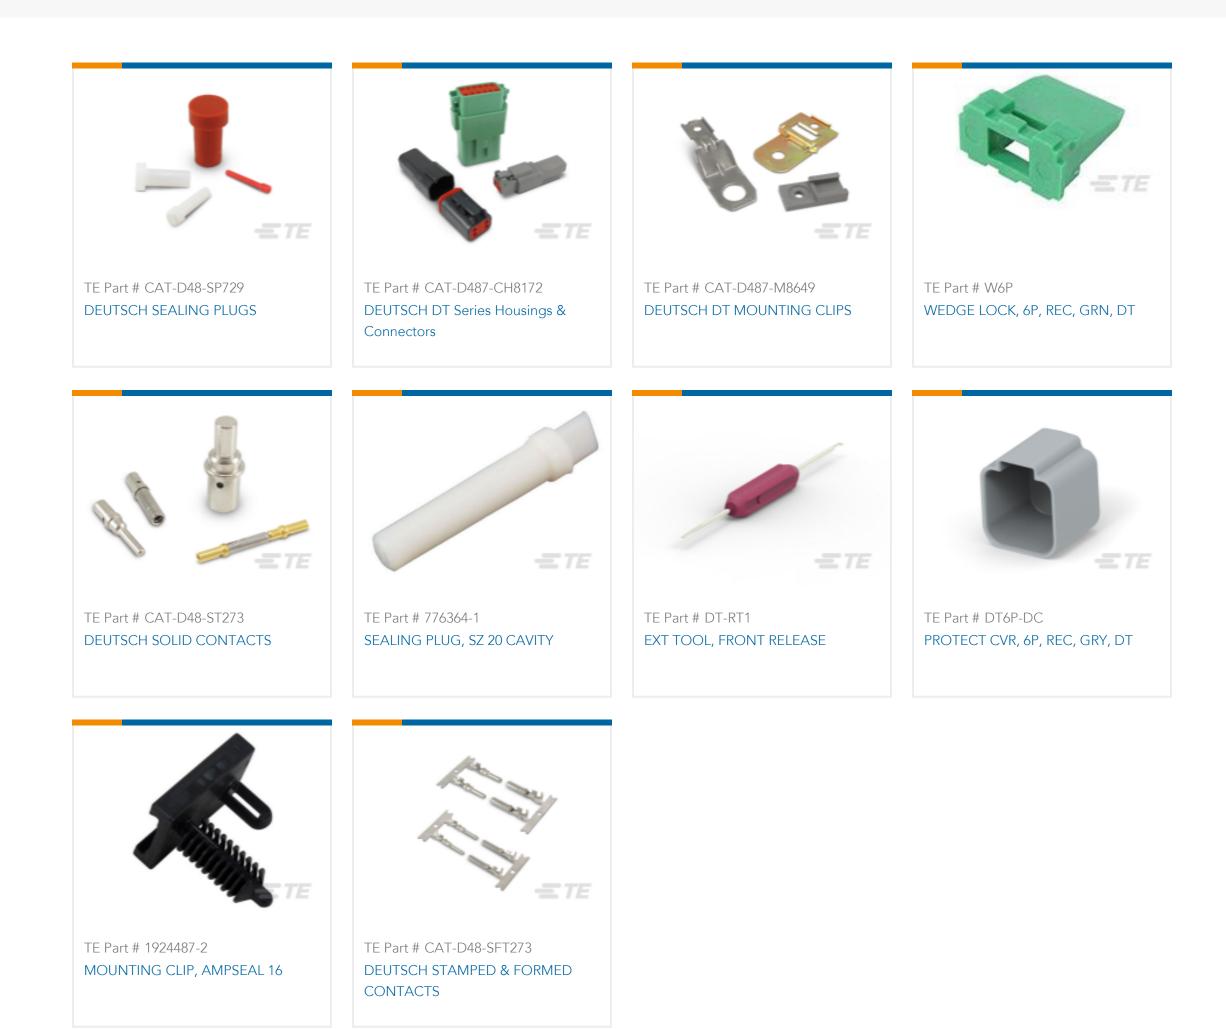

Also in the Series DEUTSCH DT

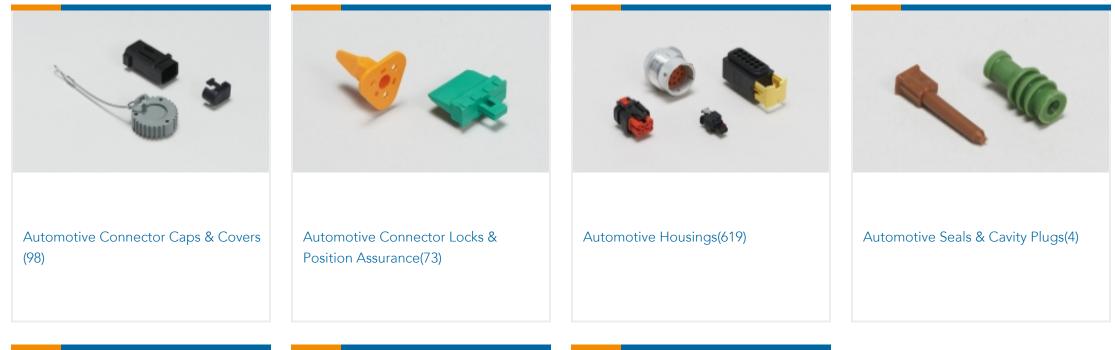

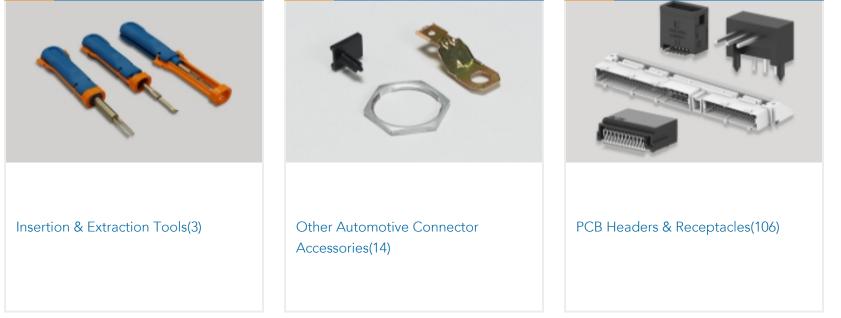

Customers Also Bought

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT





Documents

Product Drawings REC, 6P, GRY, E, CAP

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_DT04-6P-CE01_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT04-6P-CE01_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT04-6P-CE01_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals

UL Report

English