

DEUTSCH | DEUTSCH DT

TE Internal #: DT04-12PA-LE17 Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Connector Housings > DEUTSCH DT Series Housings & Connectors



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 9.12 mm [.359 in]

All DEUTSCH DT Series Housings & Connectors (461)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals



Connector System	Wire-to-Wire		
Sealable	Yes		
Hybrid Connector	No		
Primary Locking Feature	Integrated in Housing		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Blank Cavity Position	0		
Connector Modification	Sealed Flange, Gasket (Sold Separately), End Cap		
Number of Positions	12		
Number of Rows	2		
Electrical Characteristics			
Operating Voltage	250 VAC		
Nominal Voltage Architecture	12 V, 24 V, 48 V		
Body Features			

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Cable Exit Angle	180°
Body Material	PAGF
Primary Product Color	Black
Connector Code	A
Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Mounting Feature	With
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	9.12 mm[.359 in]
Dimensions	
Product Width	88.34 mm[3.478 in]
Product Length	51.89 mm[2.043 in]
Product Height	38.99 mm[1.535 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Accepts Wire Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6K9K

Centerline (Pitch)	9.12 mm[.359 in]	
Dimensions		
Product Width	88.34 mm[3.478 in]	
Product Length	51.89 mm[2.043 in]	
Product Height	38.99 mm[1.535 in]	
Row-to-Row Spacing	4.45 mm[.175 in]	
Accepts Wire Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Agency/Standard	SAE J2030	
Degree of Protection	IP68, IP6K9K	

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



12mm Flame Test per Standard UL-94
100
Box
Yes
No
Compliant
Compliant
No Restricted Materials Above Threshold
Current ECHA Candidate List: JUNE 2022 (224)

Halogen Content

Solder Process Capability

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



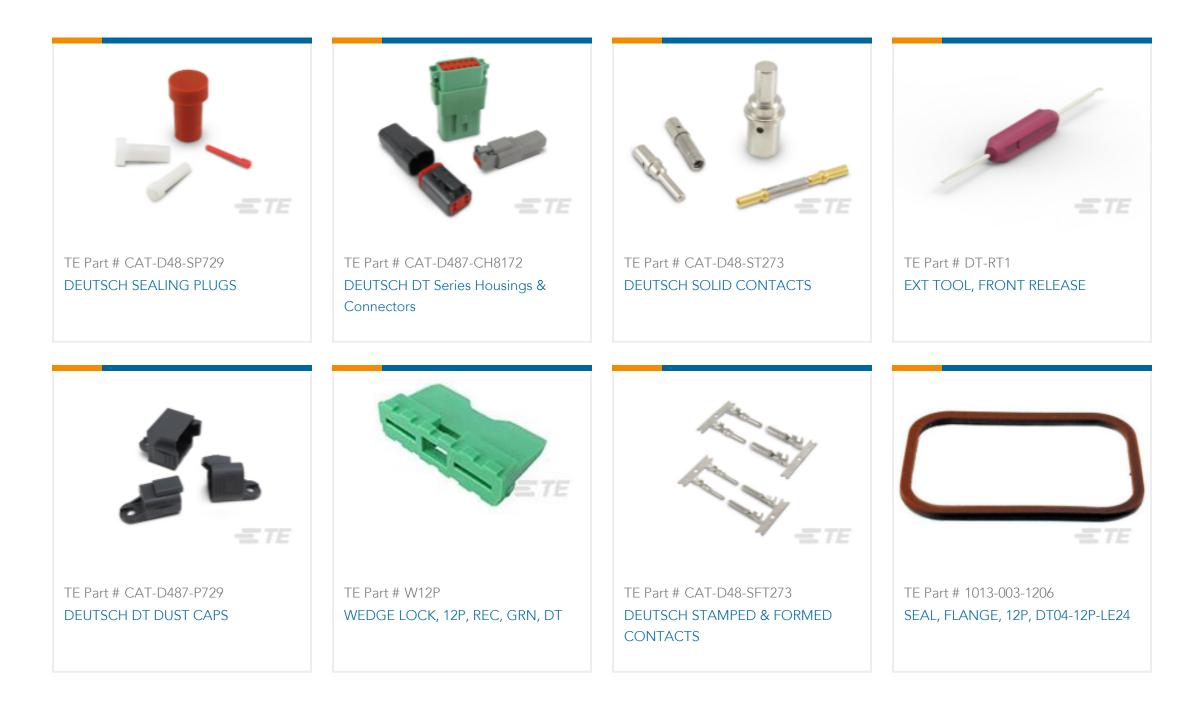


Also in the Series DEUTSCH DT



Automotive	Connector	Caps a	COVCIS	
(98)				

Position Assurance(73)

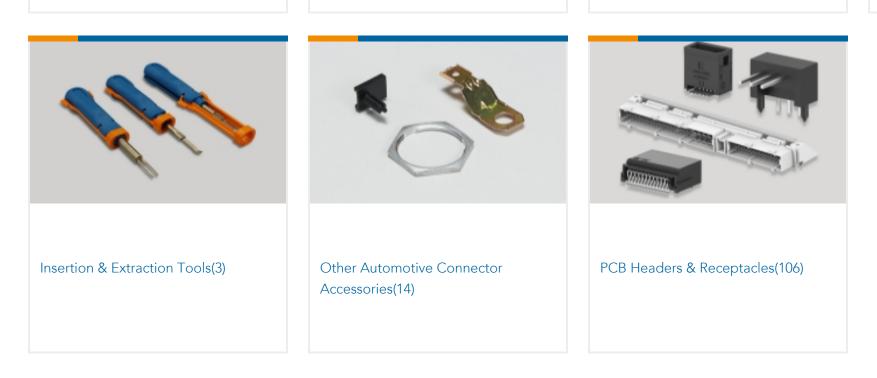

Customers Also Bought



Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





Documents

Product Drawings REC, 12P, BLK, N, CAP, FLANGE, A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE17_99_c-dt04-12pa-le17-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE17_99_c-dt04-12pa-le17-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE17_99_c-dt04-12pa-le17-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English