# DT04-12PA-B016 - ACTIVE

### DEUTSCH | DEUTSCH DT TE Internal #: DT04-12PA-B016 Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Connector Housings > DEUTSCH DT Series Housings & Connectors



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in ]

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 9.12 mm [.359 in ]

#### All DEUTSCH DT Series Housings & Connectors (461)

### Features

### Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals



Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Number of Positions	12
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Body Material	PAGF

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Primary Product Color	Gray
Connector Code	A
Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Manuatina Taatuwa	
Mounting Feature	With
Terminal Position Assurance	Yes
Terminal Position Assurance	Yes
Terminal Position Assurance Strain Relief	Yes Add By Accessory
Terminal Position Assurance Strain Relief Mating Alignment Type	Yes Add By Accessory Keyed
Terminal Position Assurance Strain Relief Mating Alignment Type Mating Alignment	YesAdd By AccessoryKeyedWith
Terminal Position Assurance Strain Relief Mating Alignment Type Mating Alignment Connector Mounting Type	YesAdd By AccessoryKeyedWith

### Dimensions

Product Width	40.56 mm[1.597 in]
Product Length	50.62 mm[1.993 in]
Product Height	22.25 mm[.876 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Accepts Wire Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	12mm Flame Test per Standard UL-94

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



### Packaging Features

Packaging Quantity	250
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Soldor Process Capability	Not raviowed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



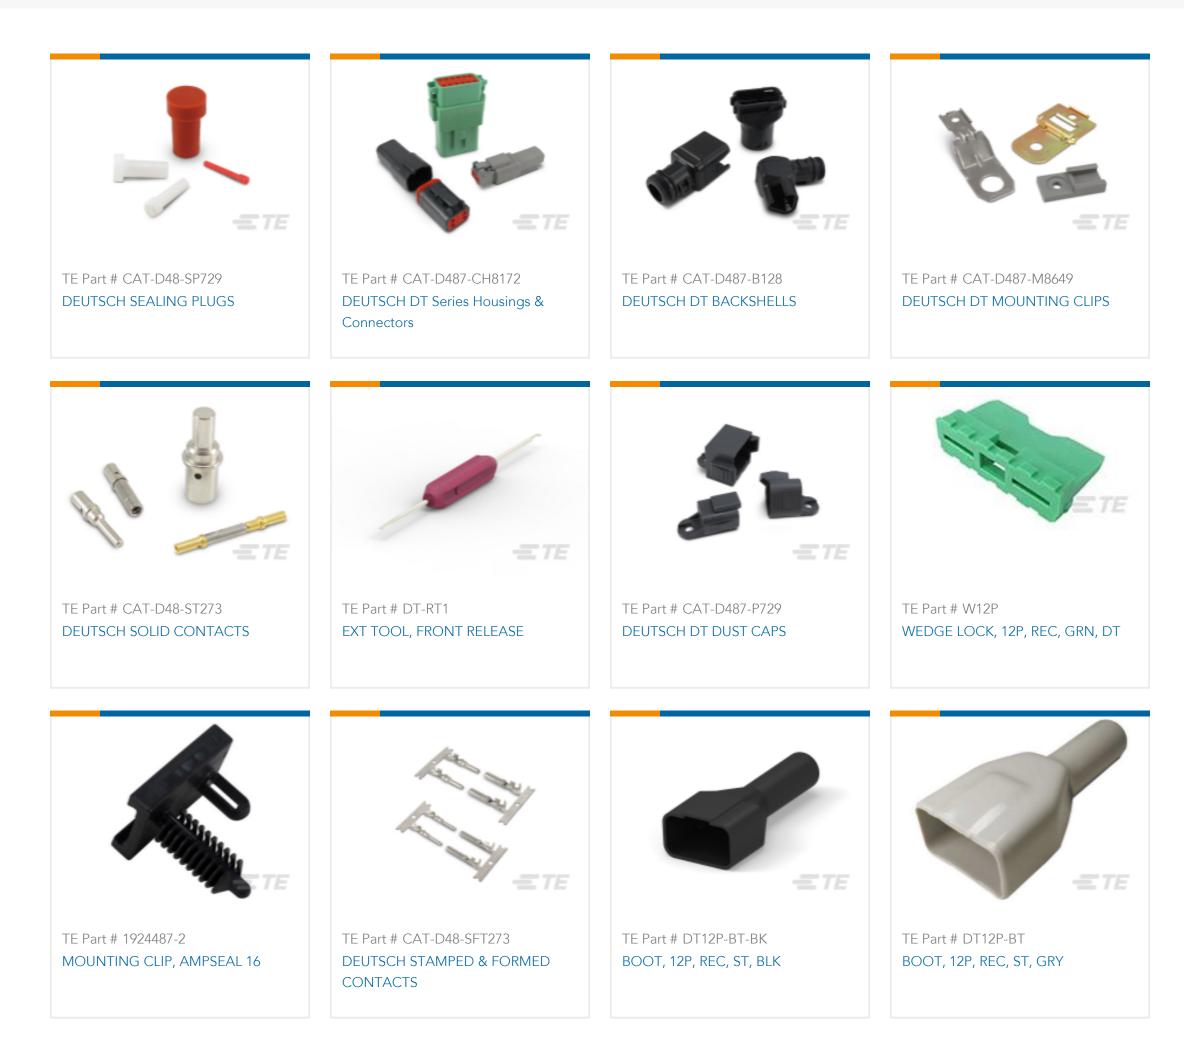




# Also in the Series DEUTSCH DT

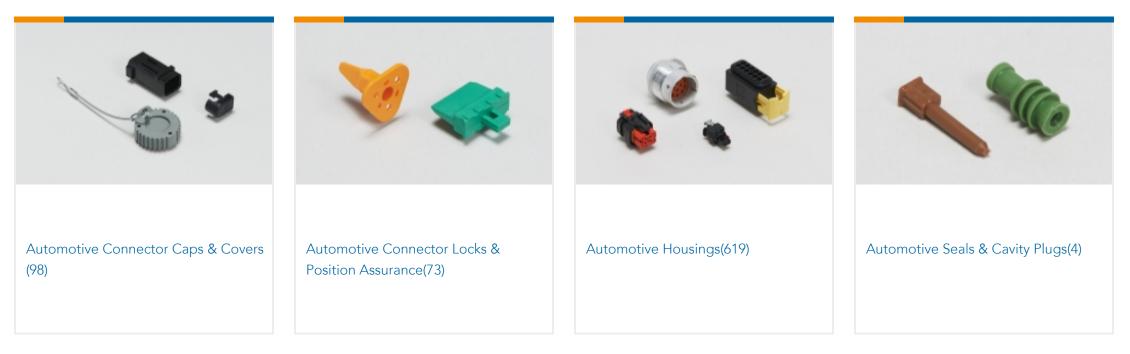


Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



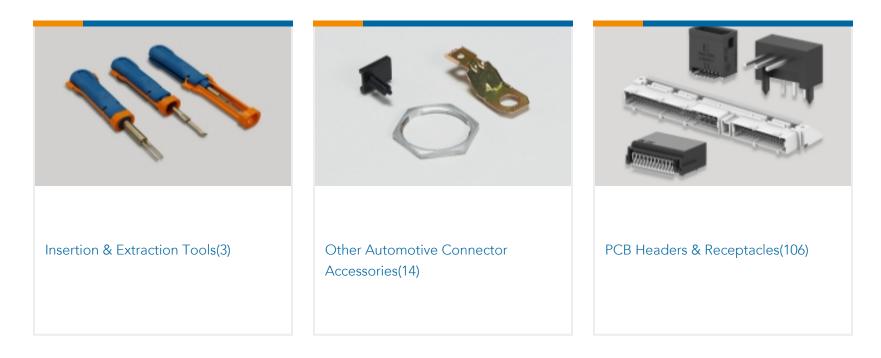

# Customers Also Bought

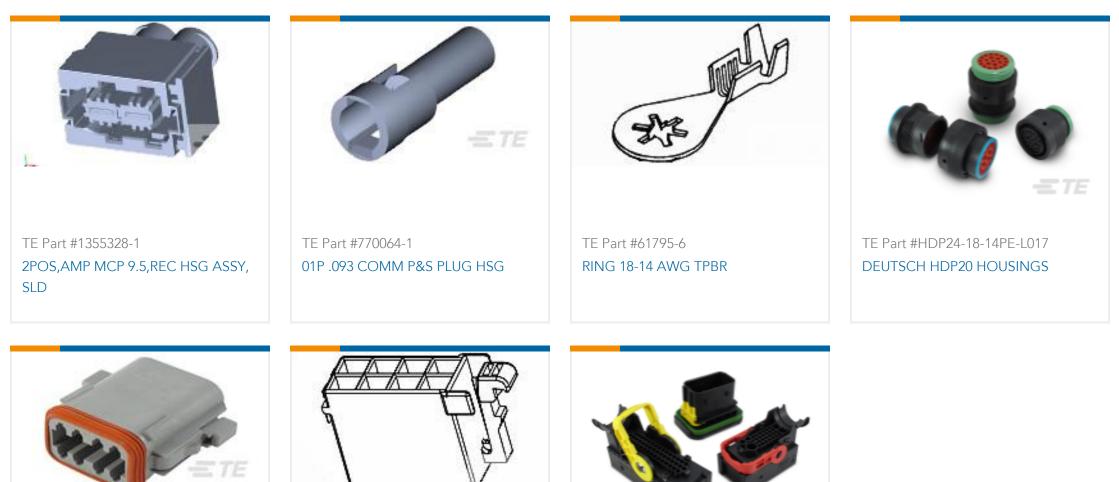

TE Part #DT06-08SA-P012

TE Part #963120-1

TE Part #2-1534127-1

### Documents

### **CAD** Files

### 3D PDF

3D

**Customer View Model** 

#### ENG\_CVM\_CVM\_DT04-12PA-B016\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_DT04-12PA-B016\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_DT04-12PA-B016\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



### CONNECTOR SELECTOR

English

Product Specifications

**Application Specification** 

English

### Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English

Agency Approvals

UL Report

English