


DEUTSCH | DEUTSCH DT

TE Internal #: 1-2303812-4 Housing for Male Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

connectivity

Connectors > Automotive Connectors > Connector Housings > DEUTSCH DT Series Housings & Connectors

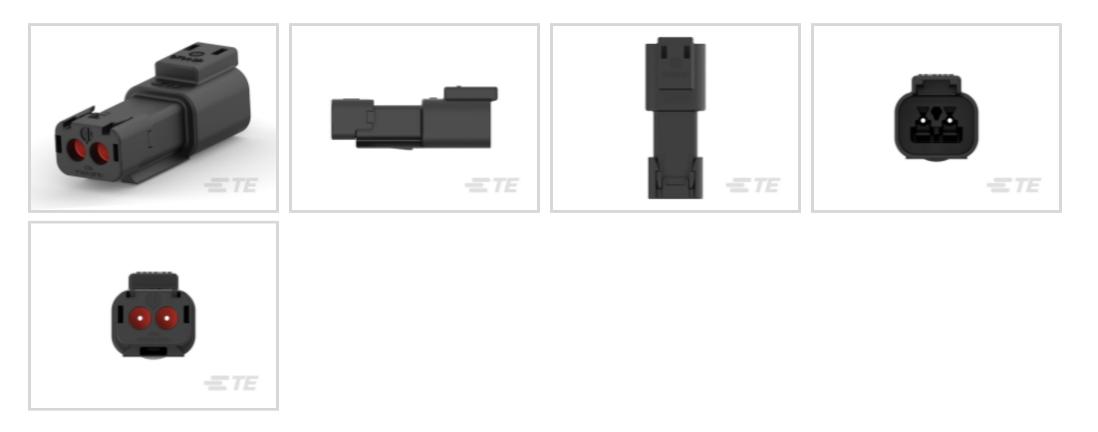

Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 5.46 mm [.215 in]

All DEUTSCH DT Series Housings & Connectors (461)

Features

Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Seal Code	E Seal
Number of Positions	2

Housing for Male Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Body Material	PA GF
Primary Product Color	Black
Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Mounting Feature	With
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5.46 mm[.215 in]
Dimensions	
Product Width	17.15 mm[.675 in]
Product Length	46.18 mm[1.818 in]
Product Height	17.02 mm[.67 in]
Accepts Wire Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	

Housing for Male Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6К9К
UL Flammability Rating	12mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	950
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022

(223) SVHC > Threshold: Not Yet Reviewed

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Male Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT




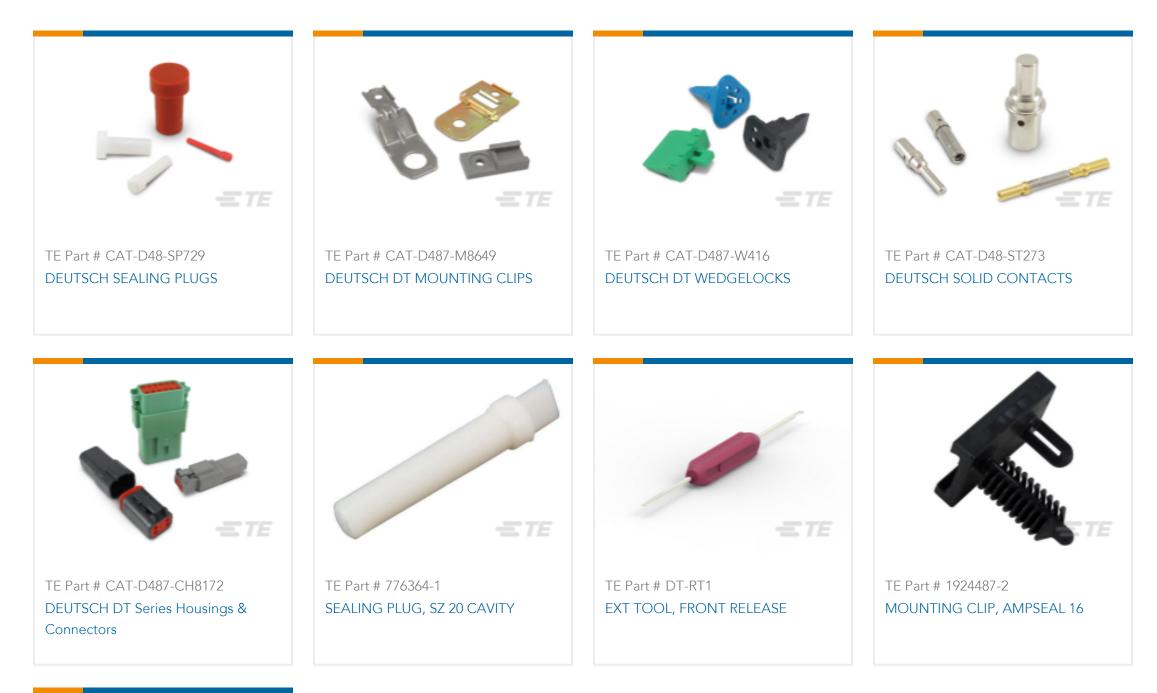




TE Part # CAT-D48-SFT273 DEUTSCH STAMPED & FORMED CONTACTS

Also in the Series DEUTSCH DT

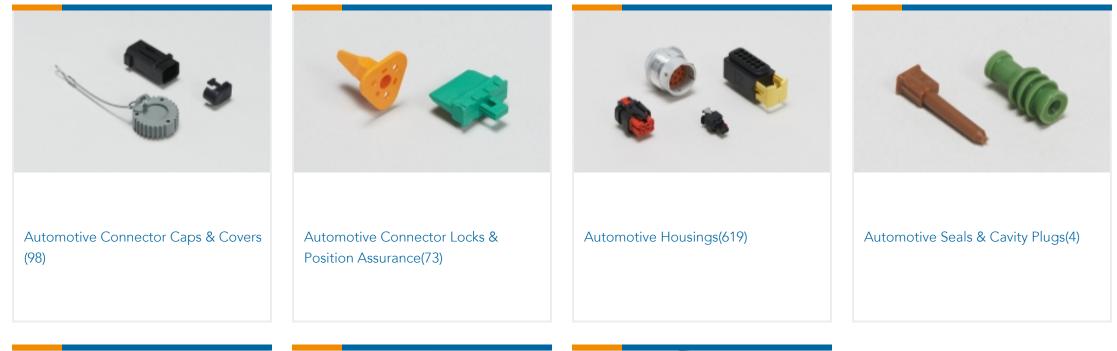

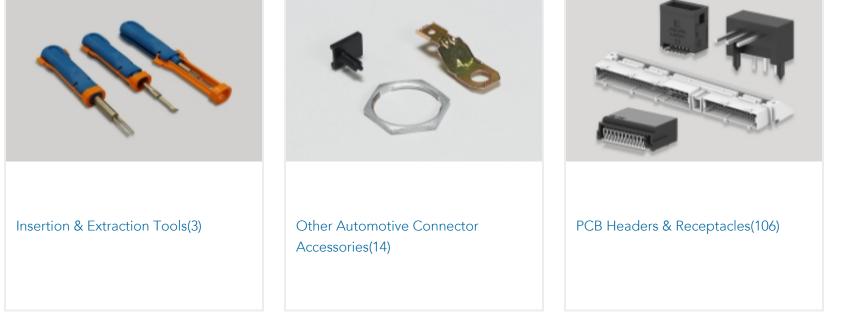


Customers Also Bought

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



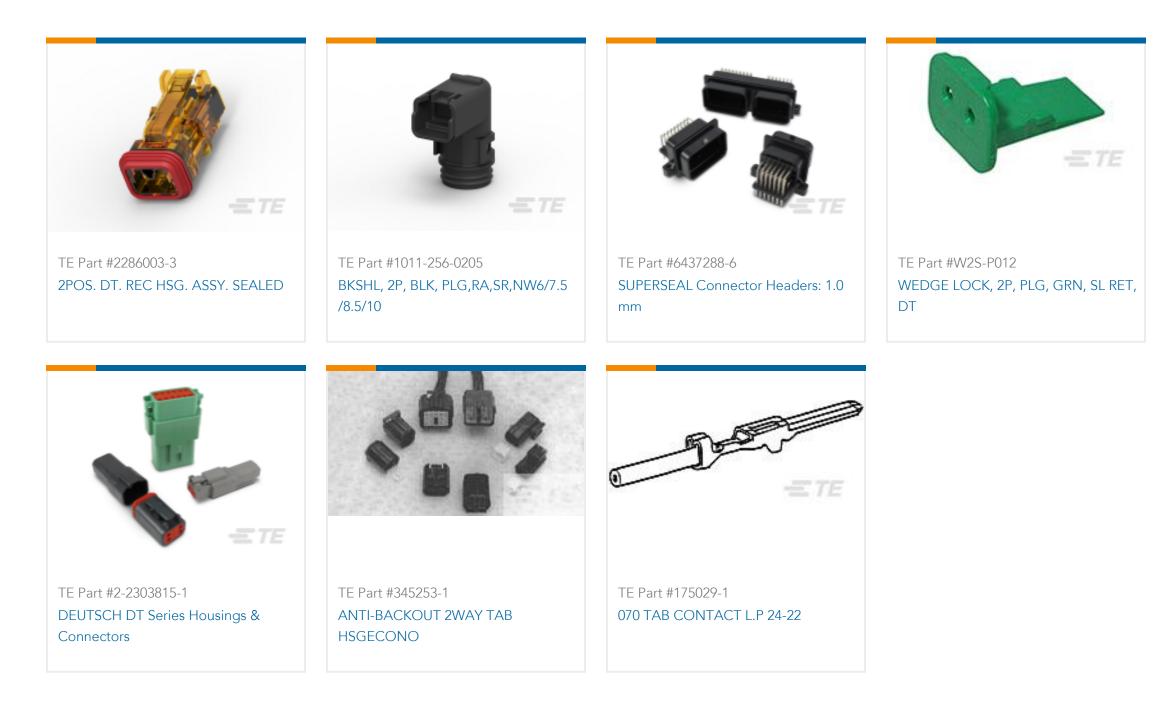

Documents

Product Drawings DT04-2P-TE32, REC, 2P, BLK, E, SNAPCAP

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2303812-4_A.2d_dxf.zip

English

Customer View Model

```
ENG_CVM_CVM_1-2303812-4_A.3d_igs.zip
```

English

Customer View Model

```
ENG_CVM_CVM_1-2303812-4_A.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals UL Report

English