

# DRC23-64PAA-N010 ✓ ACTIVE

DEUTSCH | DEUTSCH DRC

TE Internal #: DRC23-64PAA-N010

PCB Mount Header, Right Angle, Wire-to-Board, 64 Position, .174 in [4.42 mm] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, DEUTSCH DRC

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles > DEUTSCH DRC HEADERS



Connector System: **Wire-to-Board**

Number of Positions: **64**

Centerline (Pitch): **4.42 mm [ .174 in ]**

Sealable: **Yes**

PCB Mount Orientation: **Right Angle**

[All DEUTSCH DRC HEADERS \(41\)](#)

## Features

### Product Type Features

Hybrid Header	No
Connector & Housing Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

### Configuration Features

Number of Sections	4
Number of Signal Positions	64
Number of Positions	64
PCB Mount Orientation	Right Angle
Number of Rows	4

### Electrical Characteristics

Voltage Rating (Max)	250 VAC
Nominal Voltage Architecture	12 V, 24 V
Operating Voltage	250 VAC



### Body Features

Primary Product Color	Black
Connector Code	AA

### Contact Features

Contact Size	Size 20
Contact Type	Pin
Mating Pin Diameter	1.02 mm[.04 in]
Contact Mating Area Plating Material	Gold (Au)
Contact Current Rating (Max)	7.5 A

### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

### Mechanical Attachment

Mounting Holes	With
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	With
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Screw
Mating Retention Type	Locking Interface
Connector Mounting Type	Panel Mount

### Housing Features

Centerline (Pitch)	4.42 mm[.174 in]
--------------------	------------------

### Dimensions

Connector Length	28.63 mm[1.127 in]
Connector Width	133.45 mm[5.254 in]
PCB Thickness (Recommended)	.78 – 1.57 mm[.031 – .062 in]
Profile Height from PCB	38.1 mm[1.5 in]

### Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

### Operation/Application



Shielded	No
----------	----

Circuit Application	Power & Signal
---------------------	----------------

### Industry Standards

Degree of Protection	Not Tested
----------------------	------------

UL Flammability Rating	20mm Flame Test per Standard UL-94
------------------------	------------------------------------

### Packaging Features

Packaging Type	Box
----------------	-----

Packaging Quantity	24
--------------------	----

### Other

Interface Number	DRC23-24PX, DRC23-40PX
------------------	------------------------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # CAT-D799-CH8172  
DEUTSCH DRC HOUSINGS

TE Part # 0504-003-4001  
DUST CAP, 40P, REC, BLK, DRC20

TE Part # 0515-013-4005  
PROTECT CVR, 40P, REC, YEL, DRC20

TE Part # 0515-020-2405  
PROTECT CVR, 24P, REC, YEL, DRC20


TE Part # DRC26-40SA-P019  
PLG, 40P, BLK, N, ZINC CLIP, A

TE Part # DRC26-40SA-PL01  
PLG, 40P, BLK, N, ROUTER CAP, SS CLIP, A


## Also in the Series | DEUTSCH DRC



Automotive Connector Caps & Covers (9)



Automotive Housings(112)



Insertion & Extraction Tools(7)



PCB Headers & Receptacles(41)

## Customers Also Bought



TE Part #292173-8  
CT BOX HDR H SMT 8P O/TAPE BLA




TE Part #1-174961-1  
LOW & MEDIUM POWER HEADER



TE Part #DRC22-50P04  
DEUTSCH DRC HEADERS



TE Part #2174918-1  
PUSH-PUSH SIM CONNECTOR SUPER LOWPROFILE

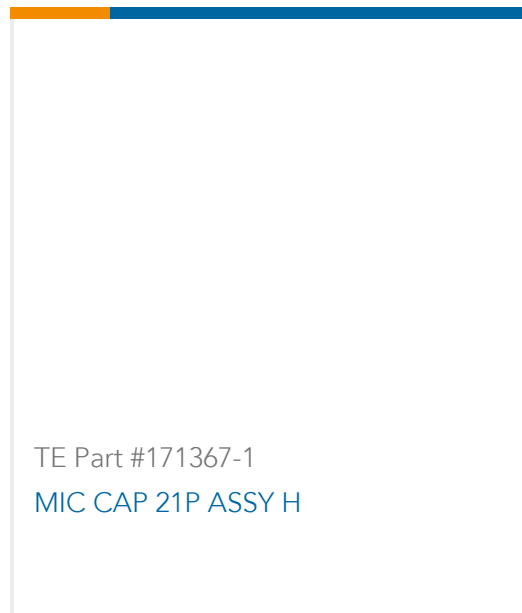

## Documents

### Product Drawings

[HDR, 64P, BLK, RA, AU/NI/CU, AA](#)

English

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_DRC23-64PAA-N010\\_99\\_c-drc23-64paa-n010-99.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_DRC23-64PAA-N010\\_99\\_c-drc23-64paa-n010-99.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_DRC23-64PAA-N010\\_99\\_c-drc23-64paa-n010-99.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

### Agency Approvals

[UL Report](#)

English