

# DTM13-12PA ✓ ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTM


TE Internal #: DTM13-12PA

PCB Mount Header, Right Angle, Wire-to-Board, 12 Position, .165 in [4.19 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Hybrid

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles > DEUTSCH DTM HEADERS

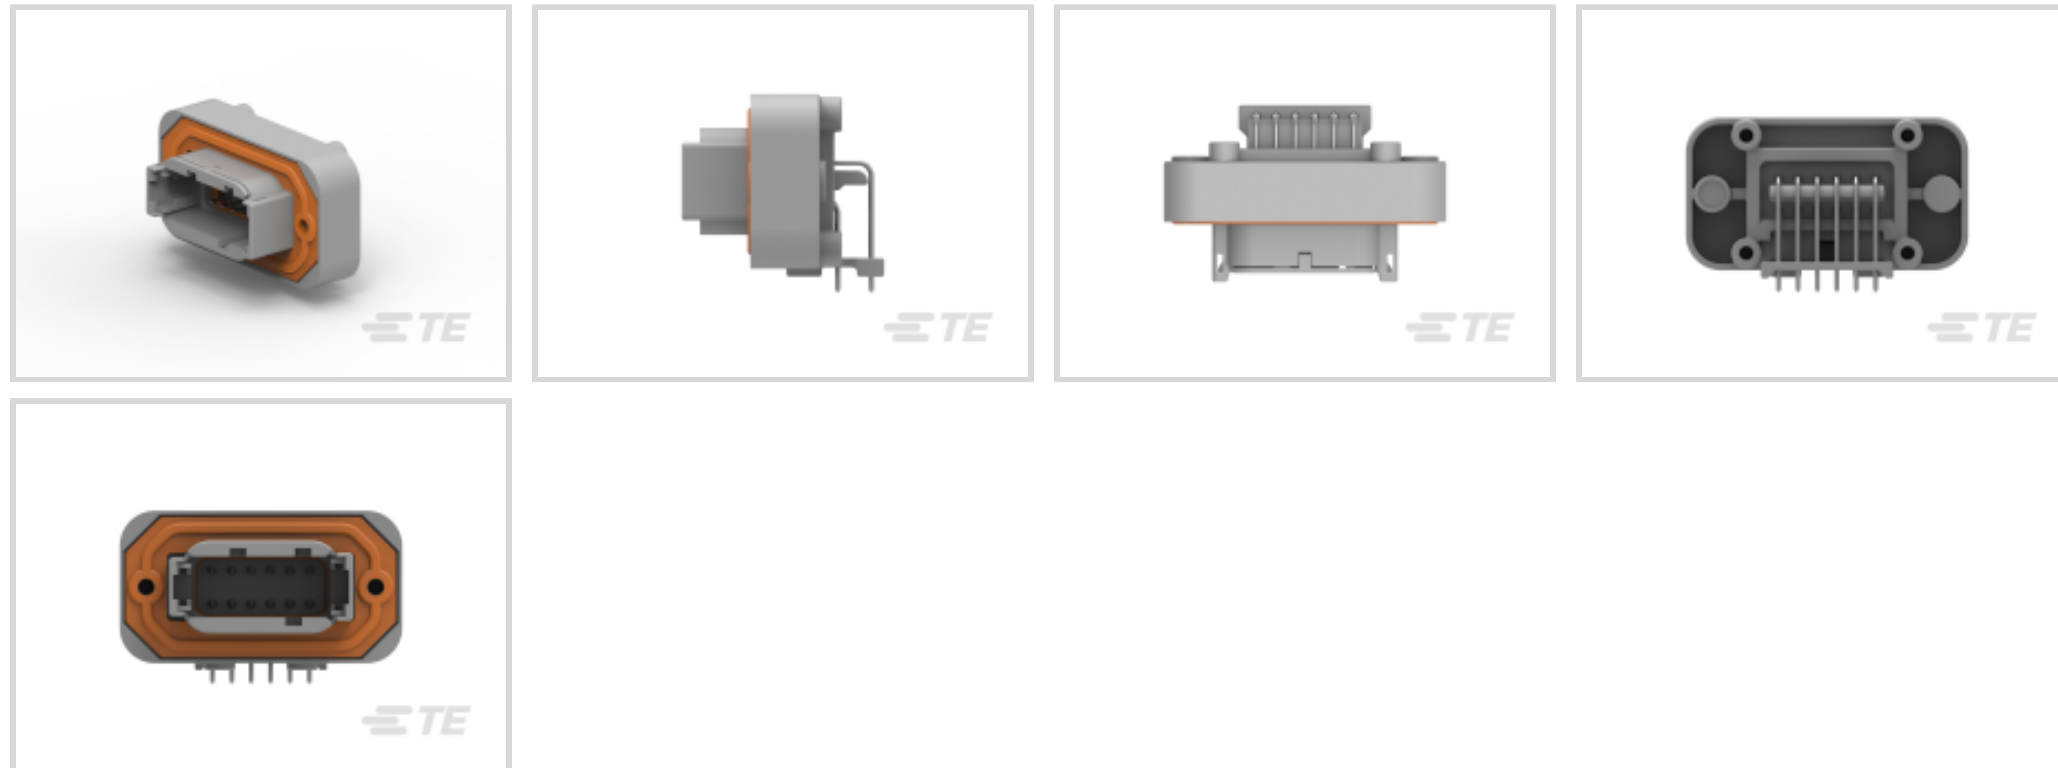

Connector System: **Wire-to-Board**

Number of Positions: **12**

Centerline (Pitch): **4.19 mm [ .165 in ]**

Sealable: **Yes**

PCB Mount Orientation: **Right Angle**

[All DEUTSCH DTM HEADERS \(32\)](#)

## Features

### Product Type Features

Hybrid Header	No
Connector & Housing Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

### Configuration Features

Number of Sections	1
Number of Signal Positions	12
Number of Positions	12
PCB Mount Orientation	Right Angle
Number of Rows	2



### Electrical Characteristics

Voltage Rating (Max)	250 VAC
Nominal Voltage Architecture	12 V, 24 V
Operating Voltage	250 VAC

### Body Features

Primary Product Color	Gray
Connector Code	A

### Contact Features

Contact Size	Size 20
Contact Type	Pin
Mating Pin Diameter	1.02 mm[.04 in]
Contact Mating Area Plating Material	Tin (Sn)
Contact Current Rating (Max)	7.5 A

### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

### Mechanical Attachment

Mounting Holes	With
Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	With
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Screw
Mating Retention Type	Locking Interface
Connector Mounting Type	Board Mount

### Housing Features

Centerline (Pitch)	4.19 mm[.165 in]
--------------------	------------------

### Dimensions

Connector Length	38.23 mm[1.505 in]
Connector Width	60.96 mm[2.4 in]
PCB Thickness (Recommended)	.78 – 2.36 mm[.031 – .093 in]

Profile Height from PCB	35.54 mm[1.36 in]
-------------------------	-------------------

### Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

### Operation/Application

Shielded	No
Circuit Application	Signal

### Industry Standards

Degree of Protection	Not Tested
UL Flammability Rating	20mm Flame Test per Standard UL-94

### Packaging Features

Packaging Type	Box
Packaging Quantity	125

### Other

Interface Number	DTM04-12P
------------------	-----------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




## Compatible Parts



## Also in the Series | DEUTSCH DT

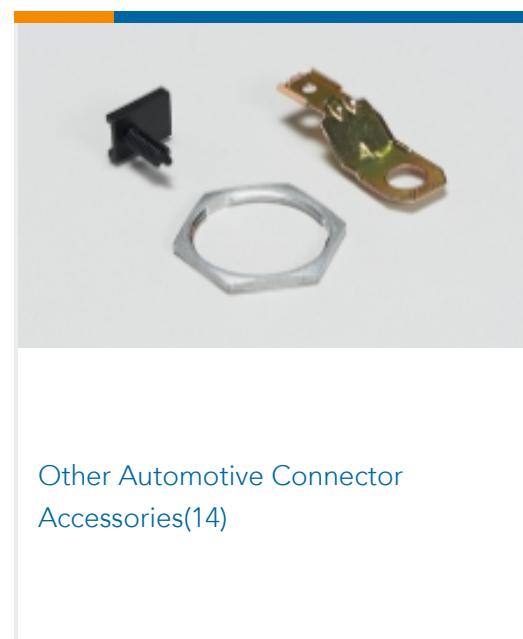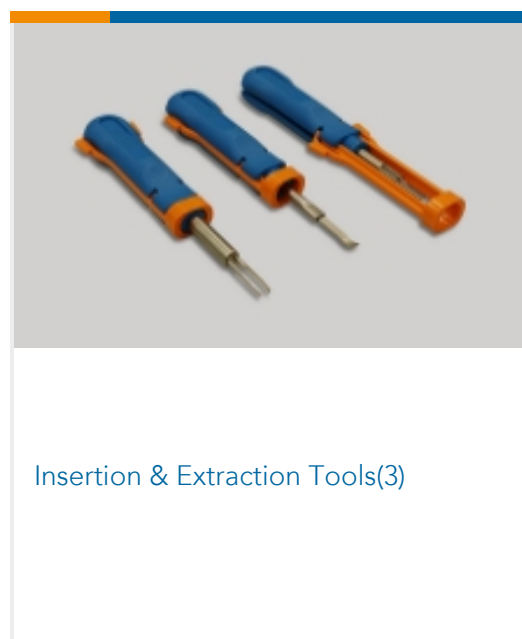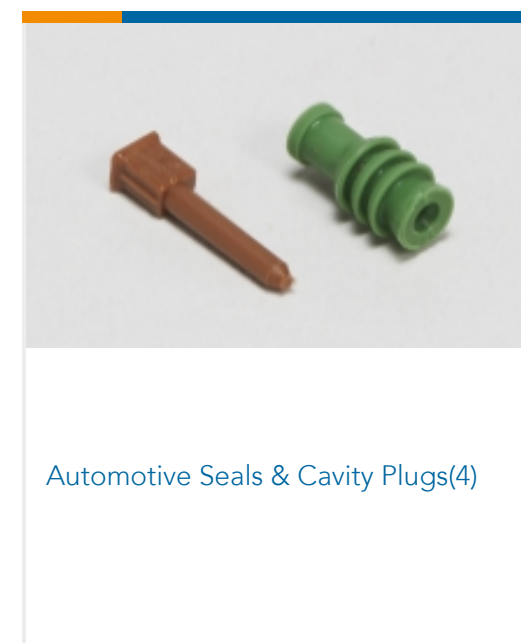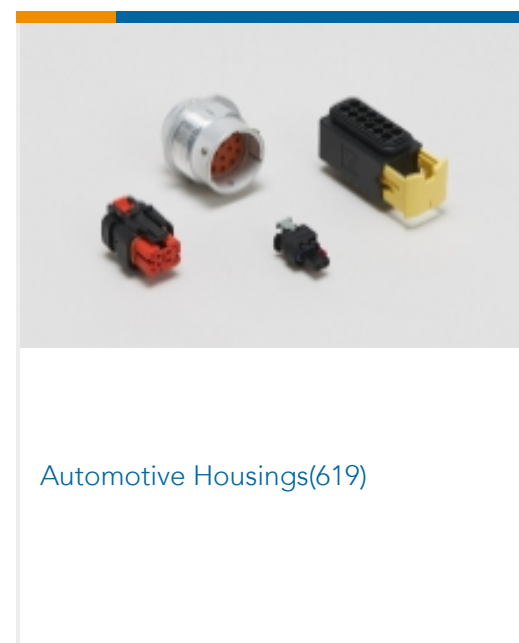

## Also in the Series | DEUTSCH DTM

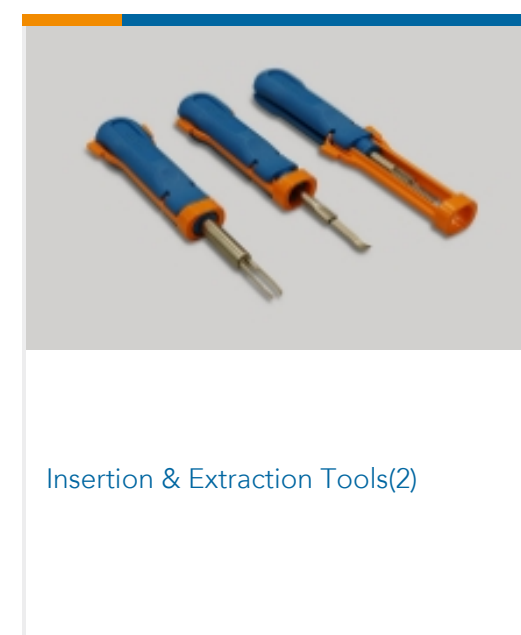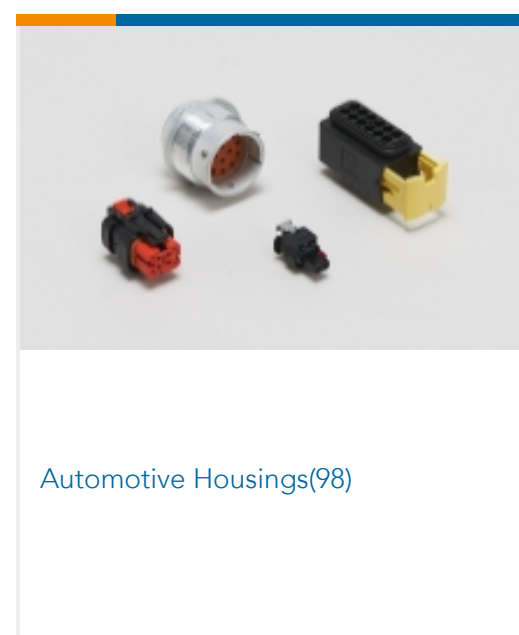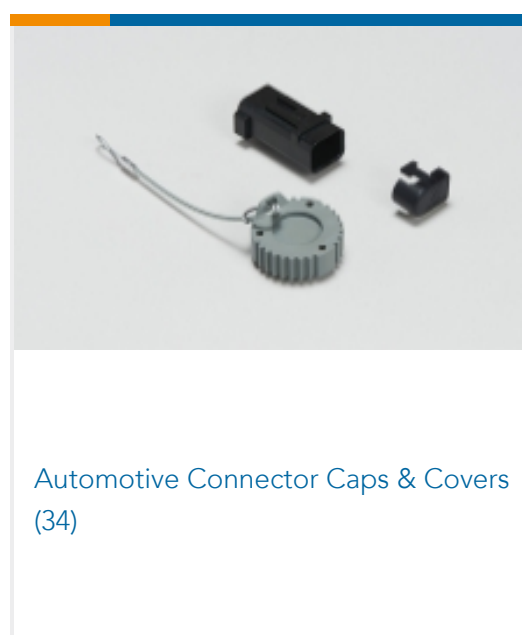



PCB Headers & Receptacles(42)

## Customers Also Bought



TE Part #1-1658528-1  
636-1030LF=FEM SKT BLADE POL 1



TE Part #DTM15-12PB  
HDR, 12P, GRY, ST, NI/CU, B



TE Part #DRC23-64PAA  
DEUTSCH DRC HEADERS



TE Part #DT13-12PA  
HDR, 12P, GRY, RA, NI/CU, A



TE Part #2266323-1  
OCEAN-2.0-APPLICATOR-S-055F062O



**CRIMPER** REPRESENTATION ONLY

TE Part #5-1803407-6  
CRIMPER, WIRE F, SMALL WIRE APPLICATION



TE Part #7-2151500-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-090F130F



TE Part #7-2151549-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-075F087F



TE Part #7-2151920-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-055F060F

## Documents

### Product Drawings

HDR, 12P, GRY, RA, SN/NI/CU, A

English

### CAD Files

Customer View Model

ENG\_CVM\_CVM\_DTM13-12PA\_99.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_DTM13-12PA\\_99.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_DTM13-12PA\\_99.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

## Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

---

## Product Specifications

[Application Specification](#)

English

---

## Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English

---

## Agency Approvals

[UL Report](#)

English