DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM04-08PA Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > DEUTSCH DTM HOUSINGS



Connector & Housing Type: Housing for Male Terminals Mating Pin Diameter: 1.02 mm [.04 in]

Connector System: Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 4.19 mm [.165 in]

All DEUTSCH DTM HOUSINGS (95)

Features

Product Type Features

Connector & Housing Shape

Rectangular

Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Number of Positions	8
Number of Rows	2
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°

Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



Body Material	PAGF
Primary Product Color	Gray
Connector Code	A
Contact Features	
Contact Size	Size 20
Contact Type	Pin
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Mounting Feature	With
Terminal Position Assurance	Yes
Terminal Position Assurance Strain Relief	Yes Add By Accessory
Strain Relief	Add By Accessory
Strain Relief Mating Alignment Type	Add By Accessory Keyed

Centerline (Pitch)

4.19 mm[.165 in]

Dimensions

Product Width	20.22 mm[.796 in]
Product Length	43.69 mm[1.72 in]
Product Height	31.62 mm[1.245 in]
Row-to-Row Spacing	7.11 mm[.28 in]
Accepts Wire Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	20mm Flame Test per Standard UL-94

Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



Packaging Features

Packaging Quantity	500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



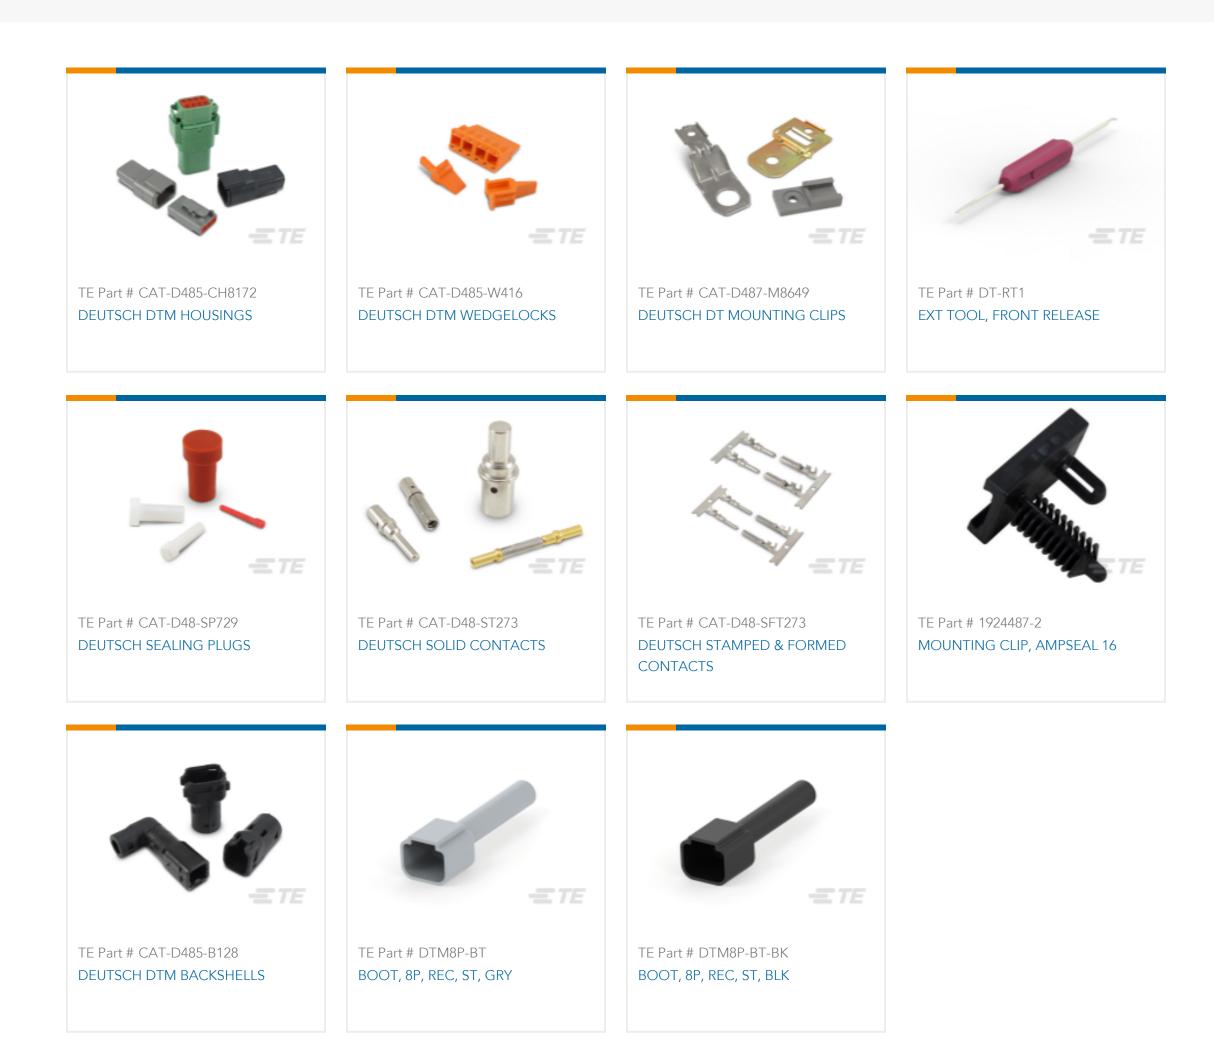

Also in the Series DEUTSCH DT



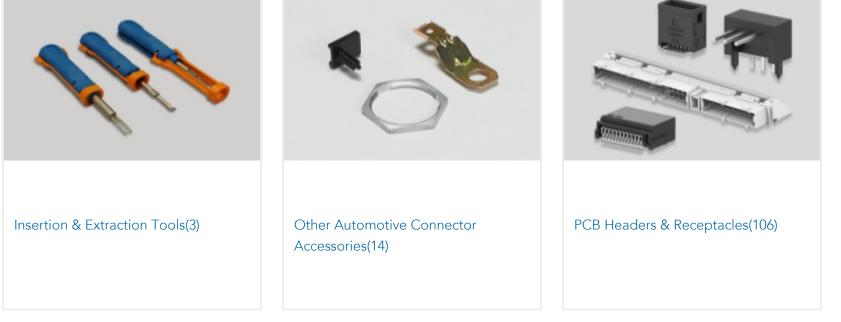


Also in the Series DEUTSCH DTM

& For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



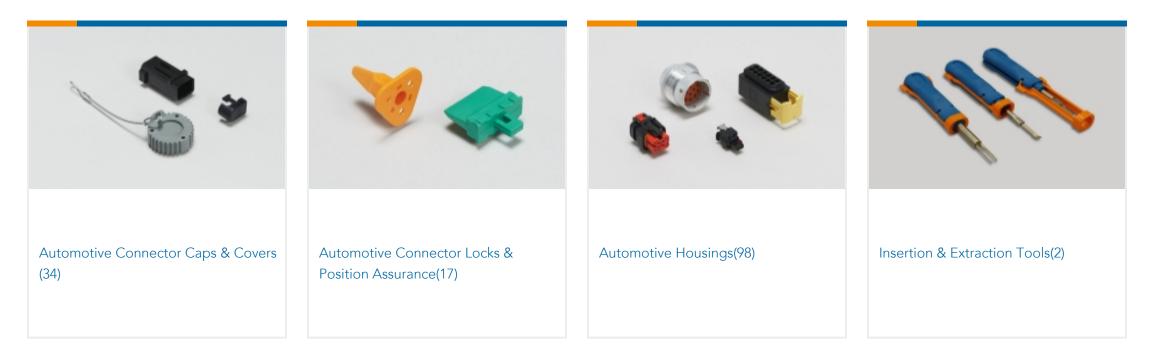



Customers Also Bought



TE Part #DTM06-08SA DEUTSCH DTM HOUSINGS TE Part #WM-8S DEUTSCH DTM WEDGELOCKS

Documents

Product Drawings

REC, 8P, GRY, N, A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTM04-08PA_99_c-dtm04-08pa-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DTM04-08PA_99_c-dtm04-08pa-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTM04-08PA_99_c-dtm04-08pa-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 8 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Engineering Report

English

Product Environmental Compliance MD_DTM04-08PA_1030201797_dmtec

English

MD_DTM04-08PA_1030201797_dmtec

English

Agency Approvals

UL Report

English