# DTM04-2P-E005 ACTIVE

### DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM04-2P-E005 Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid

### View on TE.com >



Connectors > Automotive Connectors > Connector Housings > DEUTSCH DTM HOUSINGS



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.02 mm [.04 in ]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 4.19 mm [.165 in ]

All DEUTSCH DTM HOUSINGS (95)

## Features

## Product Type Features

Connector & Housing Shape

### Rectangular

| Connector & Housing Type          | Housing for Male Terminals |  |
|-----------------------------------|----------------------------|--|
| Connector System                  | Wire-to-Wire               |  |
| Sealable                          | Yes                        |  |
| Hybrid Connector                  | No                         |  |
| Primary Locking Feature           | Integrated in Housing      |  |
| Connector & Contact Terminates To | Wire & Cable               |  |
| Configuration Features            |                            |  |
| Blank Cavity Position             | 0                          |  |
| Connector Modification            | End Cap                    |  |
| Number of Positions               | 2                          |  |
| Number of Rows                    | 1                          |  |
| Electrical Characteristics        |                            |  |
| Operating Voltage                 | 250 VAC                    |  |
| Nominal Voltage Architecture      | 12 V, 24 V, 48 V           |  |
| Body Features                     |                            |  |

Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



| Cable Exit Angle   | 180°                                 |  |
|--|--------------------------------------|--|
| Body Material  | PAGF                                 |  |
| Primary Product Color  | Black                                |  |
| Contact Features   |                                      |  |
| Contact Size   | Size 20                              |  |
| Contact Type   | Pin                                  |  |
| Mating Pin Diameter  | 1.02 mm[.04 in]                      |  |
| Contact Current Rating (Max)   | 7.5 A                                |  |
|  |                                      |  |
| Mechanical Attachment  |                                      |  |
|  | With                                 |  |
| Mechanical Attachment  | With<br>Yes                          |  |
| Mechanical Attachment<br>Mounting Feature  |                                      |  |
| Mechanical Attachment<br>Mounting Feature<br>Terminal Position Assurance   | Yes                                  |  |
| Mechanical Attachment<br>Mounting Feature<br>Terminal Position Assurance<br>Strain Relief                          | Yes<br>Add By Accessory              |  |
| Mechanical Attachment<br>Mounting Feature<br>Terminal Position Assurance<br>Strain Relief<br>Mating Alignment Type | Yes<br>Add By Accessory<br>Polarized |  |

Centerline (Pitch)

4.19 mm[.165 in]

## Dimensions

| Product Width  | 16.54 mm[.651 in]             |  |
|--|-------------------------------|--|
| Product Length   | 42.67 mm[1.68 in]             |  |
| Product Height   | 16.21 mm[.638 in]             |  |
| Accepts Wire Insulation Diameter Range                 | 1.35 – 3.05 mm[.053 – .12 in] |  |
| Usage Conditions                                       |                               |  |
| Operating Temperature (Max)                            | 125 °C[257 °F]                |  |
| Operating Temperature Range                            | -55 – 125 °C[-67 – 257 °F]    |  |
| Operation/Application                                  |                               |  |
|  |                               |  |
| Circuit Application                                    | Power & Signal                |  |
|  | Power & Signal                |  |
| Circuit Application                                    | Power & Signal<br>SAE J2030   |  |
| Circuit Application Industry Standards                 |                               |  |
| Circuit Application Industry Standards Agency/Standard | SAE J2030                     |  |

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



| Packaging Quantity                   | 1000 |
|--------------------------------------|------|
| Packaging Method                     | Box  |
| Other                                |      |
| Serviceable                          | Yes  |
| Connector Position Assurance Capable | No   |

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JUNE<br>2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |
| Solder Process Capability                     | Not reviewed for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid








TE Part # 1924487-2 MOUNTING CLIP, AMPSEAL 16

## Also in the Series DEUTSCH DT



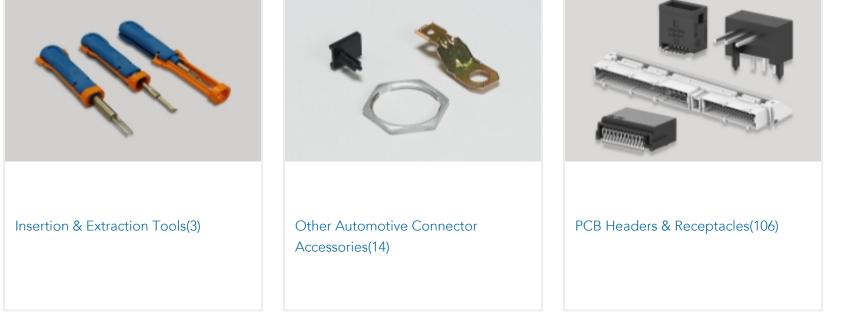


Also in the Series DEUTSCH DTM

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



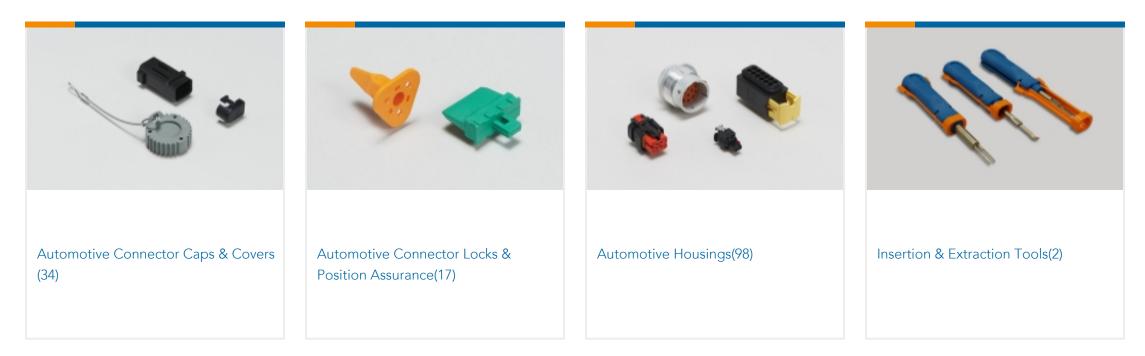



# **Customers Also Bought**



| TE Part #DRB12-102PANE       | TE Part #DTM04-4P-E005 | TE Part #890113-000            | TE Part #42947-2                   |
|------------------------------|------------------------|--------------------------------|------------------------------------|
| REC, 102P, BLK, NON-ENV, A   | DEUTSCH DTM HOUSINGS   | S1048-TAPE-1X100-FT            | RING 12-8 AWG TPBR                 |
| TE                           | =TE                    | E                              | ETE                                |
| TE Part #521206-1            | TE Part #WM-2PB        | TE Part #1060-20-0144          | TE Part #DT04-12PA-P031            |
| POSI-LOK HSG.250-4 POS RAST5 | DEUTSCH DTM WEDGELOCKS | PIN, SF, SIZE 20, 16-22, AU/SN | REC, 12P, GRY, BUSBAR 4X3, GOLD, A |

## Documents

Product Drawings REC, 2P, BLK, N, CAP English CAD Files 3D PDF 3D Customer View Model

ENG\_CVM\_CVM\_DTM04-2P-E005\_A1\_c-dtm04-2p-e005-a1.2d\_dxf.zip

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



English

Customer View Model

ENG\_CVM\_CVM\_DTM04-2P-E005\_A1\_c-dtm04-2p-e005-a1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DTM04-2P-E005\_A1\_c-dtm04-2p-e005-a1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English

Agency Approvals UL Report

English