DT06-3S-PP01 ACTIVE

DEUTSCH | DEUTSCH DT

TE Internal #: DT06-3S-PP01 Housing for Female Terminals, Component-to-Wire, 3 Position, . 394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > DEUTSCH DT Series Housings & Connectors



Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Component-to-Wire

Number of Positions: 3

Centerline (Pitch): 10.01 mm [.394 in]

All DEUTSCH DT Series Housings & Connectors (461)

Features

Product Type Features

Connector & Housing Shape	Triangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Component-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Blank Cavity Position	0
Connector Modification	Enhanced Seal Retention, Terminating Resistor, End Cap, J1939
Number of Positions	3
Electrical Characteristics	

C For support call+1 800 522 6752

Housing for Female Terminals, Component-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Body Material	PAGF
Primary Product Color	Black
Contact Features	
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With

Housing Features

Centerline (Pitch)	10.01 mm[.394 in]
Dimensions	
Product Width	18.71 mm[.737 in]
Product Length	31.19 mm[1.228 in]
Product Height	23.89 mm[.94 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	SAE J2030
Degree of Protection	IP68, IP6К9К
UL Flammability Rating	12mm Flame Test per Standard UL-94

Housing for Female Terminals, Component-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Features

Packaging Quantity	1000
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in component part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable

Halogen Content

Solder Process Capability

Not Low Halogen - contains Br or Cl > 900 ppm.

governmental regulations relevant to your geographic location.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing for Female Terminals, Component-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



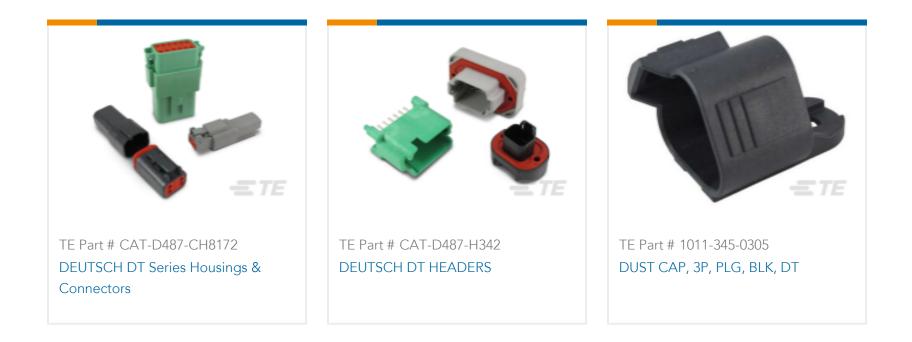


Also in the Series | DEUTSCH DT

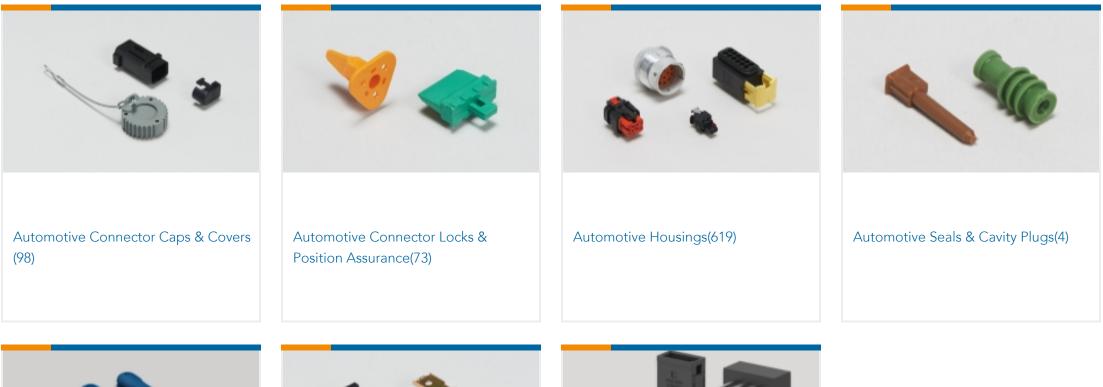







Insertion & Extraction Tools(3)

Other Automotive Connector Accessories(14) PCB Headers & Receptacles(106)

Customers Also Bought



Housing for Female Terminals, Component-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





Documents

Product Drawings

PLG, 3P, BLK, SEAL RET, 120 OHM RESISTOR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT06-3S-PP01_99_c-dt06-3s-pp01-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-PP01_99_c-dt06-3s-pp01-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-PP01_99_c-dt06-3s-pp01-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages **DEUTSCH DT Enhanced Seal Retention Connectors**

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English

Agency Approvals UL Report

Housing for Female Terminals, Component-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



English