

DTP04-4P-E003 ✓ ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTP

TE Internal #: DTP04-4P-E003

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid

[View on TE.com >](#)



Connectors > Automotive Connectors > Connector Housings > DEUTSCH DTP HOUSINGS



Connector & Housing Type: **Housing for Male Terminals**

Mating Pin Diameter: **2.39 mm [.094 in]**

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **6.71 mm [.264 in]**

[All DEUTSCH DTP HOUSINGS \(33\)](#)

Features

Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Connector Modification	End Cap
Number of Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	200 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features



Cable Exit Angle	180°
Body Material	PA GF
Primary Product Color	Gray

Contact Features

Contact Size	Size 12
Contact Type	Pin
Mating Pin Diameter	2.39 mm[.094 in]
Contact Current Rating (Max)	25 A

Mechanical Attachment

Mounting Feature	With
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Centerline (Pitch)	6.71 mm[.264 in]
--------------------	------------------

Dimensions

Product Width	26.92 mm[1.06 in]
Product Length	49.05 mm[1.931 in]
Product Height	26.62 mm[1.048 in]
Row-to-Row Spacing	10.16 mm[.4 in]
Accepts Wire Insulation Diameter Range	3.4 – 4.32 mm[.134 – .17 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Agency/Standard	SAE J2030
Degree of Protection	IP68
UL Flammability Rating	20mm Flame Test per Standard UL-94



Packaging Features

Packaging Quantity	350
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

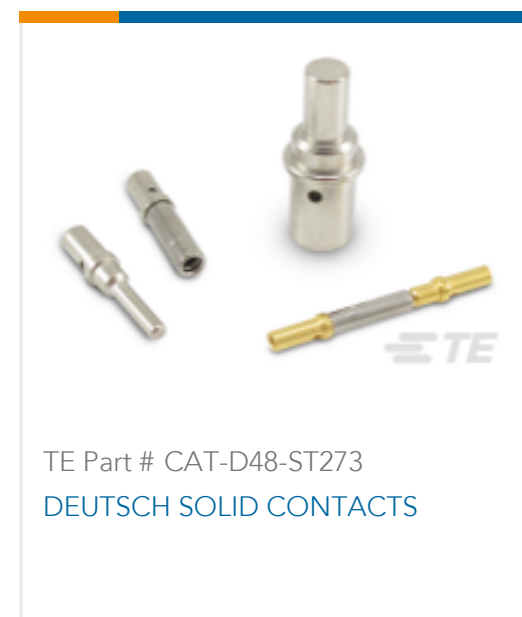


Also in the Series | **DEUTSCH DT**

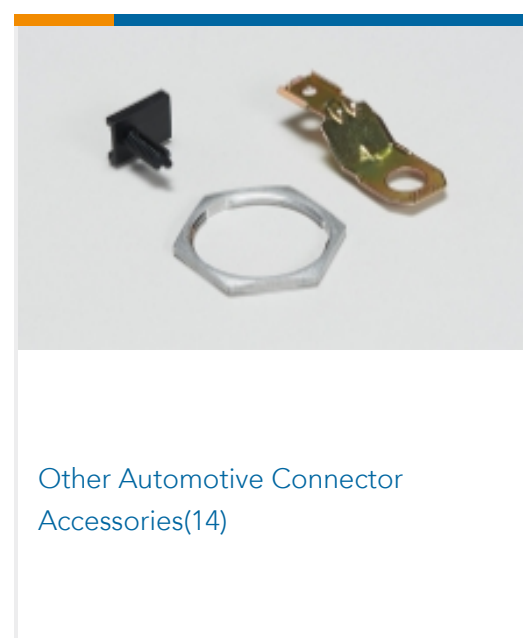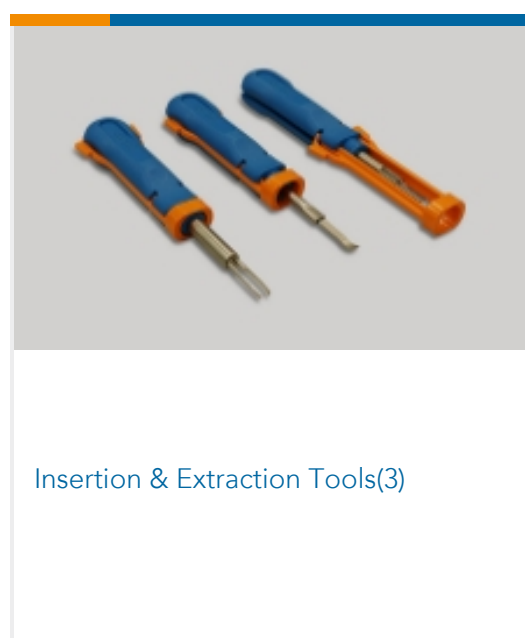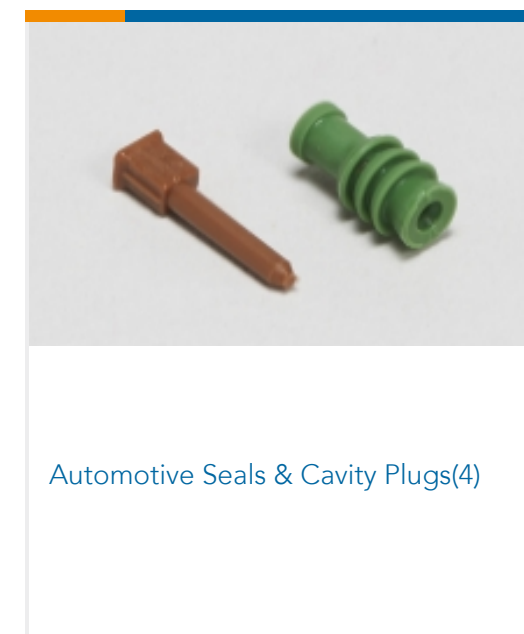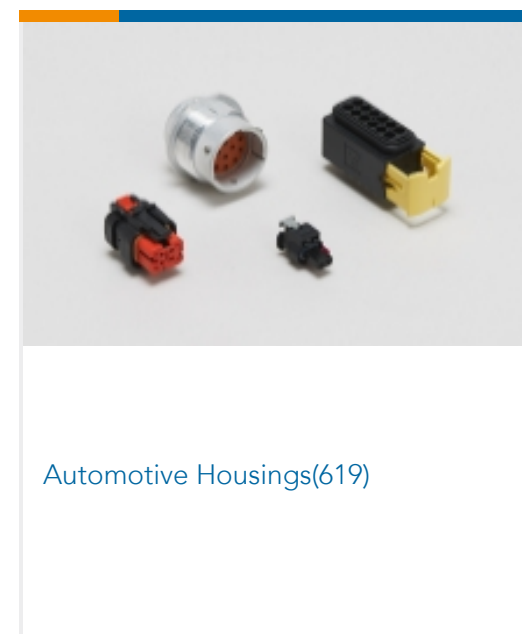


Also in the Series | **DEUTSCH DTP**

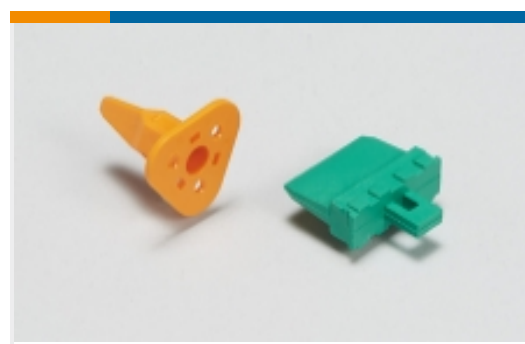


Automotive Connector Locks & Position Assurance(4)

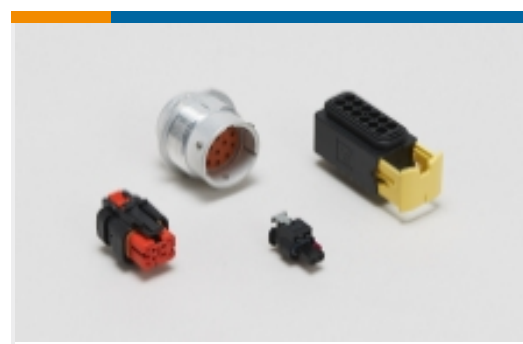

Automotive Housings(33)

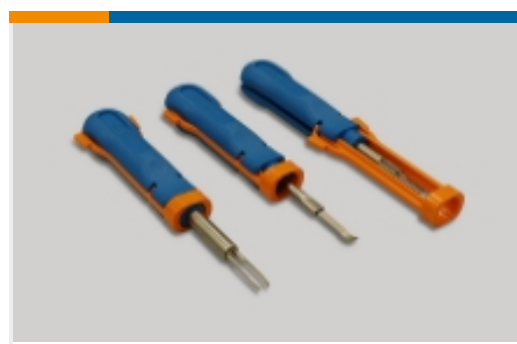

Insertion & Extraction Tools(3)

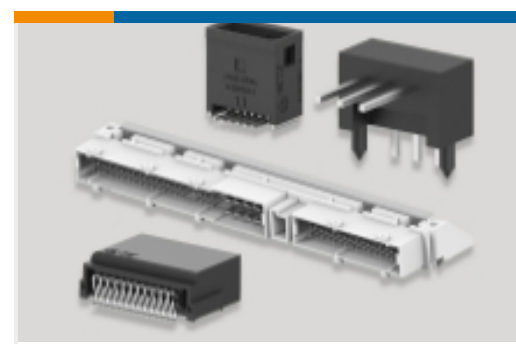


PCB Headers & Receptacles(4)

Customers Also Bought



TE Part #K1146079
Abdeckungs-Set Relais 26-08-54

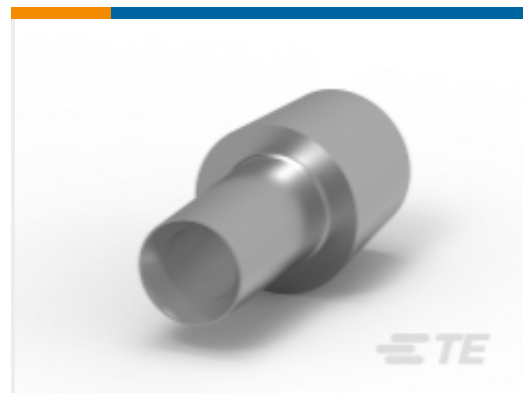

TE Part #HC5728
LEAD CONNECTOR 16MM



TE Part #HC5730
LEAD CONNECTOR 25MM +VE



TE Part #HC5732
LEAD CONNECTOR 35mm +VE



TE Part #HC5733
35MM2 NEG LEAD CONNECTOR 1/4" UNC THREAD



TE Part #HC5739
95MM2 NEGBAT LEAD 1/4" UNC THREAD




TE Part #HC5841
70MM2 BATTTERY CLMP ASSMB NEGATIVE



TE Part #HC5936
BATTERY LEAD CONN. 70mm +VE



TE Part #DT04-12PA-930C
REC, 12P, BLK, N, SEALED FLANGE, A

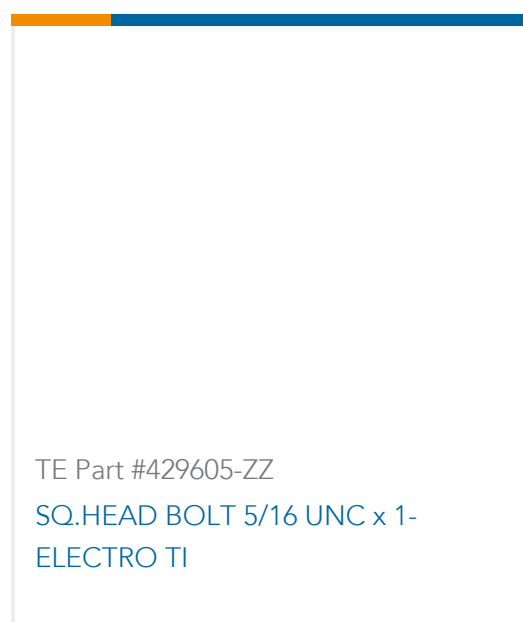

TE Part #429605-ZZ
SQ.HEAD BOLT 5/16 UNC x 1-ELECTRO TI

Documents

Product Drawings

REC, 4P, GRY, N, CAP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTP04-4P-E003_A.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_DTP04-4P-E003_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_DTP04-4P-E003_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Engineering Report](#)

English

Product Environmental Compliance

[MD_DTP04-4P-E003_1106201768_dmtec](#)

English

[MD_DTP04-4P-E003_1106201768_dmtec](#)

English

Agency Approvals

[UL Report](#)

English