




Solderless terminals

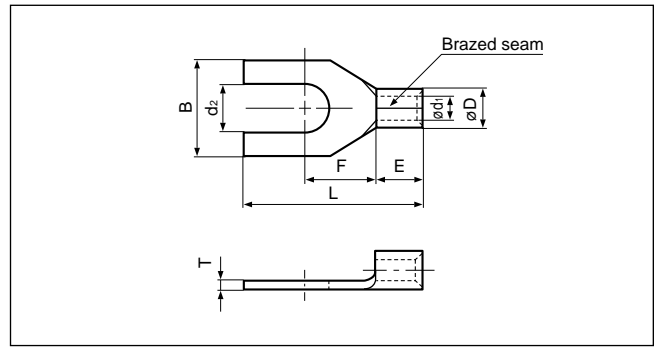

SPADE TONGUE (A type) Non-insulated




Certificate No.: E42024 LR20812




| Applicable Wire AWG#(mm ²) | Stud size | | Part No. | Standard | Dimensions mm (in.) | | | | | | | | Tool No. | Qty/box |
|---|-----------|---------|------------|-------------|---------------------|-------------|-------------|-------------|------------|------------|-----------------|------------|---|---------|
| | American | Metric | | | d ₂ | B | L | F | E | øD | ød ₁ | T | | |
| 26 to 22 (0.2 to 0.5) | 1-2 | 2 | 0.5-2A | | 2.2 (.087) | 4.6 (.181) | 12.8 (.504) | 4.5 (.177) | 4.0 (.157) | 2.0 (.079) | 1.0 (.039) | 0.5 (.020) | YHT-2622 YA-1 YA-2 BCT-0514L | 1,000 |
| | 3-4 | 3 | 0.5-3A | | 3.2 (.126) | 5.0 (.197) | 12.5 (.492) | 6.0 (.236) | | | | | | |
| | 5-6 | 3.5 | 0.5-3.7A | | 3.7 (.146) | 6.4 (.252) | 15.0 (.591) | 7.7 (.303) | | | | | | |
| | 8 | 4 | 0.5-4A | | 2.2 (.087) | 4.6 (.181) | 14.6 (.575) | 4.3 (.169) | | | | | | |
| 22 to 16 (0.25 to 1.65) | 3-4 | 3 | 1.25-C3A | | 3.2 (.126) | 5.6 (.221) | 15.8 (.622) | 6.3 (.248) | 4.8 (.189) | 3.4 (.134) | 1.7 (.067) | 0.8 (.031) | YHT-2210 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 3-4 | 3 | 1.25-B3A | | 3.2 (.126) | 5.8 (.228) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 3-4 | 3 | 1.25-M3A | | 3.2 (.126) | 6.35(.250) | 16.0 (.630) | 8.0 (.315) | | | | | | |
| | 5-6 | 3.5 | 1.25-C3.5A | | 3.7 (.146) | 5.6 (.221) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 1.25-B3.5A | | 3.7 (.146) | 5.8 (.228) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 1.25-N3A | | 3.7 (.146) | 6.2 (.244) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 1.25-YS3A | | 3.7 (.146) | 6.4 (.252) | 15.4 (.606) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 1.25-S3A | | 3.7 (.146) | 7.2 (.283) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 1.25-P3A | | 3.7 (.146) | 7.5 (.295) | 13.8 (.543) | 5.5 (.217) | | | | | | |
| | 8 | 4 | 1.25-YS4A | | 4.3 (.169) | 6.4 (.252) | 15.4 (.606) | 6.3 (.248) | | | | | | |
| | 8 | 4 | 1.25-S4A | | 4.3 (.169) | 7.2 (.283) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 8 | 4 | 1.25-4A | | 4.3 (.169) | 8.5 (.335) | 15.8 (.622) | 7.0 (.276) | | | | | | |
| | 10 | 5 | 1.25-S5A | | 5.3 (.209) | 7.2 (.283) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 10 | 5 | 1.25-M5A | | 5.3 (.209) | 8.5 (.335) | 15.8 (.622) | 7.0 (.276) | | | | | | |
| 10 | 5 | 1.25-5A | 5.3 (.209) | 9.5 (.374) | 15.8 (.622) | 7.0 (.276) | | | | | | | | |
| 1/4 | 6 | 1.25-6A | 6.4 (.252) | 12.0 (.472) | 22.0 (.866) | 11.0 (.433) | | | | | | | | |
| 16 to 14 (1.04 to 2.63) | 3-4 | 3 | 2-N3A | | 3.2 (.126) | 5.9 (.232) | 15.8 (.622) | 6.3 (.248) | 4.8 (.189) | 4.1 (.161) | 2.3 (.091) | 0.8 (.031) | YHT-2210 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 3-4 | 3 | 2-M3A | | 3.2 (.126) | 6.0 (.236) | 14.5 (.571) | 5.0 (.197) | | | | | | |
| | 5-6 | 3.5 | 2-C3.5A | | 3.7 (.146) | 5.6 (.220) | 15.8 (.622) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 2-YS3A | | 3.7 (.146) | 6.4 (.252) | 15.4 (.606) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | 2-S3A | | 3.7 (.146) | 7.2 (.283) | 16.0 (.630) | 6.5 (.256) | | | | | | |
| | 8 | 4 | 2-YS4A | | 4.3 (.169) | 6.4 (.252) | 15.4 (.606) | 6.3 (.248) | | | | | | |
| | 8 | 4 | 2-YM4A | | 4.3 (.169) | 6.8 (.268) | 15.4 (.606) | 6.3 (.248) | | | | | | |
| | 8 | 4 | 2-S4A | | 4.3 (.169) | 7.2 (.283) | 16.0 (.630) | 6.5 (.256) | | | | | | |
| | 8 | 4 | 2-4A | | 4.3 (.169) | 8.5 (.335) | 16.8 (.661) | 7.3 (.287) | | | | | | |
| | 10 | 5 | 2-M5A | | 5.3 (.209) | 8.5 (.335) | 16.8 (.661) | 7.3 (.287) | | | | | | |
| | 10 | 5 | 2-5A | | 5.3 (.209) | 9.5 (.374) | 16.8 (.661) | 7.3 (.287) | | | | | | |
| | 1/4 | 6 | 2-6A | | 6.4 (.252) | 12.0 (.472) | 22.0 (.866) | 11.0 (.433) | | | | | | |
| 12 to 10 (2.63 to 6.64) | 5-6 | 3.5 | 5.5-S3A | | 3.7 (.146) | 7.2 (.283) | 19.5 (.768) | 7.5 (.295) | 6.8 (.268) | 5.6 (.220) | 3.4 (.134) | 1.0 (.039) | YHT-2210 YA-1 YA-2 YA-4 BCT-0514L | 500 |
| | 5-6 | 3.5 | 5.5-3A | | 3.7 (.146) | 9.5 (.374) | 19.5 (.768) | 7.5 (.295) | | | | | | |
| | 8 | 4 | 5.5-S4A | | 4.3 (.169) | 8.5 (.335) | 19.5 (.768) | 7.5 (.295) | | | | | | |
| | 8 | 4 | 5.5-4A | | 4.3 (.169) | 9.5 (.374) | 19.5 (.768) | 7.5 (.295) | | | | | | |
| | 10 | 5 | 5.5-5A | | 5.3 (.209) | 9.5 (.374) | 19.5 (.768) | 7.5 (.295) | | | | | | |
| | 1/4 | 6 | 5.5-6A | | 6.4 (.252) | 13.5 (.532) | 25.5(1.004) | 12.2 (.480) | | | | | | |
| | 5/16 | 8 | 5.5-8A | | 8.4 (.331) | 13.5 (.532) | 25.5(1.004) | 12.2 (.480) | | | | | | |

Note:1) The part numbers indicated in the above table are for products with a brazed seam.
 When ordering products with a butted seam, add the prefix "WS" to the part number (ex. 2-4A -> **WS2-4A**).
 2) Delivery lead times may vary depending on the product. Contact JST for details.

Solderless terminals



SPADE TONGUE (A type) Vinyl-insulated

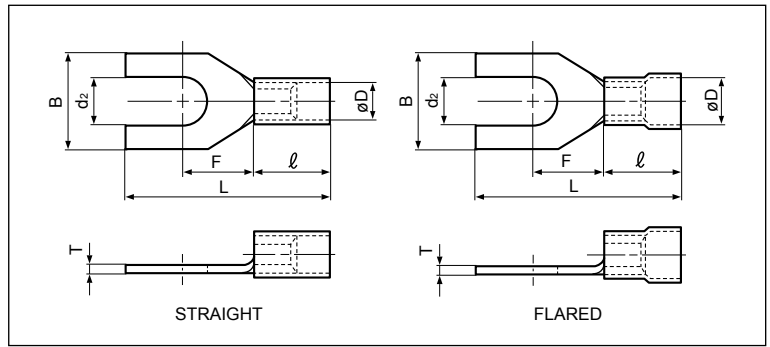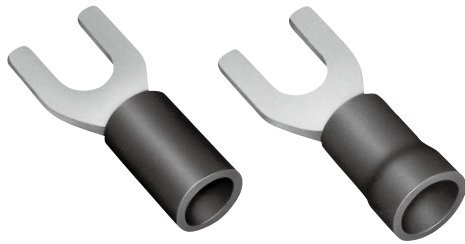

Certificate No.: E42024 LR20812



| Applicable Wire AWG#(mm ²) | Stud size | | Part No. | | Standard | Dimensions mm (in.) | | | | | | | Color | Tool No. | Qty/box | |
|---|-----------|----------|-------------|-------------|-------------|---------------------|-------------|-------------|-------------|----------------|---------------|---------------|---------------|----------|---|-------|
| | American | Metric | Straight | Flared | | d ₂ | B | L | F | ℓ | øD | | | | | T |
| 26 to 22 (0.2 to 0.5) | 3-4 | 3 | V0.5-3A | FV0.5-3A | | 3.2 (.126) | 5.0 (.197) | 16.5 (.650) | 6.0 (.236) | 8.0 | 1.9 | 2.9 | 0.5 | Yellow | YNT-2622 YA-1, YA-2 BCT-0514L | 1,000 |
| | 5-6 | 3.5 | V0.5-3.7A | FV0.5-3.7A | | 3.7 (.146) | 6.4 (.252) | 19.0 (.748) | 7.7 (.303) | (.315) | (.075) | (.114) | (.020) | | | |
| 22 to 16 *(0.25 to 1.65) | 1-2 | 2 | V1.25-2A | FV1.25-2A | | 2.2 (.087) | 4.6 (.181) | 18.8 (.740) | 4.3 (.169) | 9.0 (.354) | 3.2 (.126) | 4.0 (.157) | 0.8 (.031) | Red | YNT-2216 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 3-4 | 3 | V1.25-B3A | FV1.25-B3A | | 3.2 (.126) | 5.8 (.228) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | V1.25-C3.5A | — | | 3.7 (.146) | 5.6 (.220) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | V1.25-N3A | FV1.25-N3A | | 3.7 (.146) | 6.2 (.244) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | V1.25-YS3A | FV1.25-YS3A | | 3.7 (.146) | 6.4 (.252) | 19.6 (.772) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | V1.25-S3A | FV1.25-S3A | | 3.7 (.146) | 7.2 (.284) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | V1.25-YS4A | FV1.25-YS4A | | 4.3 (.169) | 6.4 (.252) | 19.6 (.772) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | V1.25-S4A | FV1.25-S4A | | 4.3 (.169) | 7.2 (.284) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | V1.25-4A | FV1.25-4A | | 4.3 (.169) | 8.5 (.335) | 20.0 (.787) | 7.0 (.276) | | | | | | | |
| | 10 | 5 | V1.25-S5A | FV1.25-S5A | | 5.3 (.209) | 7.2 (.284) | 20.0 (.787) | 6.3 (.248) | | | | | | | |
| | 10 | 5 | — | FV1.25-M5A | | 5.3 (.209) | 8.5 (.335) | 20.0 (.787) | 7.0 (.276) | | | | | | | |
| 10 | 5 | V1.25-5A | FV1.25-5A | 5.3 (.209) | 9.5 (.374) | 20.0 (.787) | 7.0 (.276) | | | | | | | | | |
| 1/4 | 6 | V1.25-6A | FV1.25-6A | 6.4 (.252) | 12.0 (.472) | 26.2(1.032) | 11.0 (.433) | | | | | | | | | |
| 16 to 14 (1.04 to 2.63) | 3-4 | 3 | V2-N3A | FV2-N3A | | 3.2 (.126) | 5.9 (.232) | 20.0 (.787) | 6.3 (.248) | 9.0 (.354) | 3.9 (.154) | 4.5 (.177) | 0.8 (.031) | Blue | YNT-1614 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 5-6 | 3.5 | V2-YS3A | FV2-YS3A | | 3.7 (.146) | 6.4 (.252) | 19.6 (.772) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | V2-S3A | FV2-S3A | | 3.7 (.146) | 7.2 (.284) | 20.2 (.795) | 6.5 (.256) | | | | | | | |
| | 5-6 | 3.5 | V2-3A | — | | 3.7 (.146) | 8.5 (.335) | 21.0 (.827) | 7.3 (.287) | | | | | | | |
| | 8 | 4 | V2-YS4A | FV2-YS4A | | 4.3 (.169) | 6.4 (.252) | 19.6 (.772) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | — | FV2-YM4A | | 4.3 (.169) | 6.8 (.268) | 19.6 (.772) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | V2-S4A | FV2-S4A | | 4.3 (.169) | 7.2 (.284) | 20.2 (.795) | 6.5 (.256) | | | | | | | |
| | 8 | 4 | V2-4A | FV2-4A | | 4.3 (.169) | 8.5 (.335) | 21.0 (.827) | 7.3 (.287) | | | | | | | |
| | 10 | 5 | V2-M5A | — | | 5.3 (.209) | 8.5 (.335) | 21.0 (.827) | 7.3 (.287) | | | | | | | |
| | 10 | 5 | V2-5A | FV2-5A | | 5.3 (.209) | 9.5 (.374) | 21.0 (.827) | 7.3 (.287) | | | | | | | |
| 1/4 | 6 | V2-6A | FV2-6A | 6.4 (.252) | 12.0 (.472) | 26.2(1.032) | 11.0 (.433) | | | | | | | | | |
| 12 to 10 (2.63 to 6.64) | 5-6 | 3.5 | V5.5-S3A | FV5.5-S3A | | 3.7 (.146) | 7.2 (.283) | 26.2(1.032) | 7.5 (.295) | 13.5 (.531) | 5.4 (.213) | 6.8 (.268) | 1.0 (.039) | Yellow | YNT-1210S YA-4 BCT-0514L | 500 |
| | 5-6 | 3.5 | V5.5-3A | FV5.5-3A | | 3.7 (.146) | 9.5 (.374) | 26.2(1.032) | 7.5 (.295) | | | | | | | |
| | 8 | 4 | V5.5-S4A | FV5.5-S4A | | 4.3 (.169) | 8.5 (.335) | 26.2(1.032) | 7.5 (.295) | | | | | | | |
| | 8 | 4 | V5.5-4A | FV5.5-4A | | 4.3 (.169) | 9.5 (.374) | 26.2(1.032) | 7.5 (.295) | | | | | | | |
| | 10 | 5 | V5.5-5A | FV5.5-5A | | 5.3 (.209) | 9.5 (.374) | 26.2(1.032) | 7.5 (.295) | | | | | | | |
| | 1/4 | 6 | V5.5-6A | FV5.5-6A | | 6.4 (.252) | 13.5 (.532) | 32.2(1.268) | 12.2 (.480) | | | | | | | |

- Note: 1) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².
 Examples: If the cross-sectional area of the wire is 0.3 mm², fold the wire in two when crimping the terminal.
 If the cross-sectional area of the wire is 0.5 mm², crimp the terminal onto the wire as it is.
- 2) The part numbers indicated in the above table are for products with a brazed seam.
 When ordering products with a butted seam, add the prefix "WS" to the part number (ex. V2-4A → **VWS2-4A**).
- 3) To order products with nylon insulation, change the "V" in the part number prefix to "N" (ex. V2-4A → **N2-4A**).
 Because nylon absorbs moisture, care must be taken concerning storage.
- 4) Delivery lead times may vary depending on the product. Contact JST for details.

Solderless terminals



SPADE TONGUE (A type) vinyl-insulated (funnel-entry)

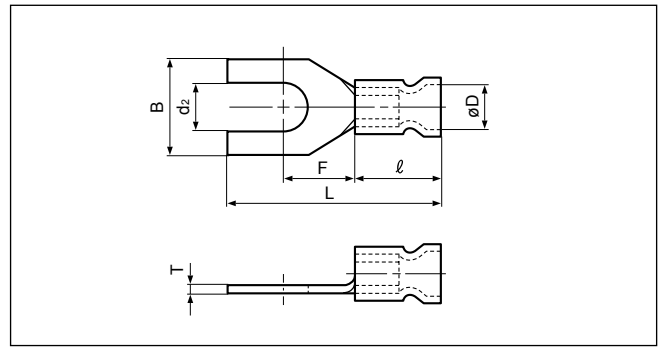


Certificate No.: E42024 LR20812




| Applicable Wire AWG#(mm ²) | Stud size | | Part No. | Standard | Dimensions mm (in.) | | | | | | | Color | Tool No. | Qty/box |
|---|-----------|--------|--------------|----------|---------------------|-------------|-------------|-------------|----------------|---------------|---------------|--------|--|---------|
| | American | Metric | | | d_2 | B | L | F | ℓ | ϕD | T | | | |
| 22 to 16 *(0.25 to 1.65) | 3-4 | 3 | FVX1.25-B3A | | 3.2 (.126) | 5.8 (.228) | 21.8 (.858) | 6.3 (.248) | 10.8 (.425) | 4.0 (.157) | 0.8 (.031) | Red | YNT-2216 YA-1,YA-2 YA-4 BCT-0514L | 1,000 |
| | 5-6 | 3.5 | FVX1.25-N3A | | 3.7 (.146) | 6.2 (.244) | 21.8 (.858) | 6.3 (.248) | | | | | | |
| | 5-6 | 3.5 | FVX1.25-YS3A | | 3.7 (.146) | 6.4 (.252) | 21.4 (.843) | 6.3 (.248) | | | | | | |
| 16 to 14 (1.04 to 2.63) | 8 | 4 | FVX2-YS4A | | 4.3 (.169) | 6.4 (.252) | 21.4 (.843) | 6.3 (.248) | 10.8 (.425) | 4.6 (.181) | 0.8 (.031) | Blue | BCT-0514 YNT-1614 YA-1,YA-2 YA-4 BCT-0514L | 1,000 |
| | 8 | 4 | FVX2-YM4A | | 4.3 (.169) | 6.8 (.268) | 21.4 (.843) | 6.3 (.248) | | | | | | |
| | 8 | 4 | FVX2-4A | | 4.3 (.169) | 8.5 (.335) | 22.8 (.898) | 7.3 (.287) | | | | | | |
| 12 to 10 (2.63 to 6.64) | 8 | 4 | FVX5.5-S4A | | 4.3 (.169) | 8.5 (.335) | 26.7(1.051) | 7.5 (.295) | 14.0 (.551) | 6.8 (.268) | 1.0 (.039) | Yellow | YNT-1210S YA-4 BCT-0514L | 500 |
| | 8 | 4 | FVX5.5-4A | | 4.3 (.169) | 9.5 (.374) | 26.7(1.051) | 7.5 (.295) | | | | | | |
| | 10 | 5 | FVX5.5-5A | | 5.3 (.209) | 9.5 (.374) | 26.7(1.051) | 7.5 (.295) | | | | | | |
| | 5/16 | 8 | FVX5.5-8A | | 8.4 (.331) | 13.5 (.532) | 32.7(1.287) | 12.2 (.480) | | | | | | |

- Note: 1) The part numbers indicated in the above table are for products with a brazed seam.
 When ordering products with a butted seam, add the prefix "WS" to the part number (ex. FVX2-4A → **FVXWS2-4A**).
- 2) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².
 Examples: If the cross-sectional area of the wire is 0.3 mm², fold the wire in two when crimping the terminal.
 If the cross-sectional area of the wire is 0.5 mm², crimp the terminal onto the wire as it is.
- 3) Delivery lead times may vary depending on the product. Contact JST for details.

Solderless terminals



SPADE TONGUE (A type) vinyl-insulated with copper sleeve

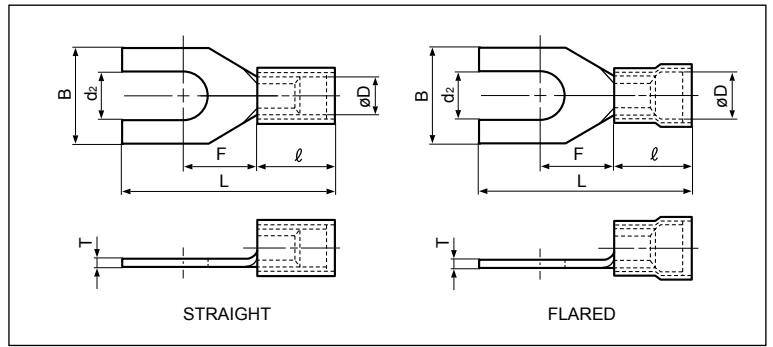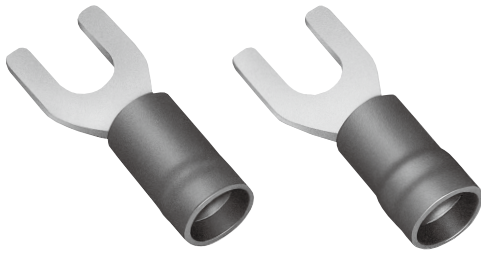

Certificate No.: E42024

| Applicable Wire AWG#(mm ²) | Stud size | | Part No. | | Standard | Dimensions mm (in.) | | | | | | | | Color | Tool No. | Qty/box |
|---|-----------|-----------|-------------|--------------|-------------|---------------------|-------------|-------------|-------------|----------------|---------------|---------------|---------------|--------|---|---------|
| | American | Metric | Straight | Flared | | d ₂ | B | L | F | ℓ | ø D | | T | | | |
| | | | | | | | | | | | Str. | Flid. | | | | |
| 26 to 22 (0.2 to 0.5) | 3-4 | 3 | VD0.5-3A | — | | 3.2 (.126) | 5.0 (.197) | 16.5 (.650) | 6.0 (.236) | 8.0 (.315) | 2.2 (.087) | 2.5 (.098) | 0.5 (.020) | Yellow | YNT-2622 YA-1, YA-2 BCT-0514L | 1,000 |
| | 5-6 | 3.5 | VD0.5-3.7A | — | | 3.7 (.146) | 6.4 (.252) | 19.0 (.748) | 7.7 (.303) | | | | | | | |
| | 5-6 | 3.5 | — | FVD0.5-3.7A | | 3.7 (.146) | 6.4 (.252) | 19.3 (.760) | 7.7 (.303) | | | | | | | |
| 22 to 16 (0.25 to 1.65) | 1-2 | 2 | VD1.25-2A | — | | 2.2 (.087) | 4.6 (.181) | 19.4 (.764) | 4.3 (.169) | 9.6 (.378) | 3.5 (.138) | 4.0 (.157) | 0.8 (.031) | Red | YNT-2216 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 3-4 | 3 | VD1.25-B3A | FVD1.25-B3A | | 3.2 (.126) | 5.8 (.228) | 20.6 (.811) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | VD1.25-N3A | FVD1.25-N3A | | 3.7 (.146) | 6.2 (.244) | 20.6 (.811) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | VD1.25-YS3A | FVD1.25-YS3A | | 3.7 (.146) | 6.4 (.252) | 20.2 (.795) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | VD1.25-S3A | FVD1.25-S3A | | 3.7 (.146) | 7.2 (.284) | 20.6 (.811) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | VD1.25-YS4A | FVD1.25-YS4A | | 4.3 (.169) | 6.4 (.252) | 20.2 (.795) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | VD1.25-S4A | FVD1.25-S4A | | 4.3 (.169) | 7.2 (.284) | 20.6 (.811) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | VD1.25-4A | — | | 4.3 (.169) | 8.5 (.335) | 20.6 (.811) | 7.0 (.276) | | | | | | | |
| | 10 | 5 | VD1.25-S5A | — | | 5.3 (.209) | 7.2 (.284) | 20.6 (.811) | 6.3 (.248) | | | | | | | |
| | 10 | 5 | VD1.25-M5A | — | | 5.3 (.209) | 8.5 (.335) | 20.6 (.811) | 7.0 (.276) | | | | | | | |
| | 10 | 5 | VD1.25-5A | FVD1.25-5A | | 5.3 (.209) | 9.5 (.374) | 20.6 (.811) | 7.0 (.276) | | | | | | | |
| 1/4 | 6 | VD1.25-6A | — | 6.4 (.252) | 12.0 (.472) | 26.8(1.055) | 11.0 (.433) | | | | | | | | | |
| 16 to 14 (1.04 to 2.63) | 3-4 | 3 | VD2-N3A | FVD2-N3A | | 3.2 (.126) | 5.9 (.232) | 20.6 (.811) | 6.3 (.248) | 9.6 (.378) | 4.1 (.161) | 4.7 (.185) | 0.8 (.031) | Blue | YNT-1614 YA-1 YA-2 YA-4 BCT-0514L | 1,000 |
| | 3-4 | 3 | VD2-M3A | — | | 3.2 (.126) | 6.0 (.236) | 19.3 (.760) | 5.0 (.197) | | | | | | | |
| | 5-6 | 3.5 | VD2-YS3A | — | | 3.7 (.146) | 6.4 (.252) | 20.2 (.795) | 6.3 (.248) | | | | | | | |
| | 5-6 | 3.5 | VD2-S3A | FVD2-S3A | | 3.7 (.146) | 7.2 (.284) | 20.8 (.819) | 6.5 (.256) | | | | | | | |
| | 5-6 | 3.5 | VD2-3A | — | | 3.7 (.146) | 8.5 (.335) | 21.6 (.850) | 7.3 (.287) | | | | | | | |
| | 8 | 4 | — | FVD2-YS4A | | 4.3 (.169) | 6.4 (.252) | 20.2 (.795) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | VD2-YM4A | FVD2-YM4A | | 4.3 (.169) | 6.8 (.268) | 20.2 (.795) | 6.3 (.248) | | | | | | | |
| | 8 | 4 | VD2-S4A | FVD2-S4A | | 4.3 (.169) | 7.2 (.284) | 20.8 (.819) | 6.5 (.256) | | | | | | | |
| | 10 | 5 | VD2-M5A | — | | 4.3 (.169) | 8.5 (.335) | 21.6 (.850) | 7.3 (.287) | | | | | | | |
| | 10 | 5 | VD2-5A | FVD2-5A | | 5.3 (.209) | 9.5 (.374) | 21.6 (.850) | 7.3 (.287) | | | | | | | |
| | 1/4 | 6 | — | FVD2-6A | | 6.4 (.252) | 12.0 (.472) | 26.8(1.055) | 11.0 (.433) | | | | | | | |
| 12 to 10 (2.63 to 6.64) | 5-6 | 3.5 | VD5.5-S3A | FVD5.5-S3A | | 3.7 (.146) | 7.2 (.283) | 26.7(1.051) | 7.5 (.295) | 14.0 (.551) | 5.7 (.224) | 6.5 (.256) | 1.0 (.039) | Yellow | YNT-1210S YA-4 BCT-0514L | 500 |
| | 5-6 | 3.5 | VD5.5-3A | FVD5.5-3A | | 3.7 (.146) | 9.5 (.374) | 26.7(1.051) | 7.5 (.295) | | | | | | | |
| | 8 | 4 | VD5.5-S4A | FVD5.5-S4A | | 4.3 (.169) | 8.5 (.335) | 26.7(1.051) | 7.5 (.295) | | | | | | | |
| | 8 | 4 | VD5.5-4A | FVD5.5-4A | | 4.3 (.169) | 9.5 (.374) | 26.7(1.051) | 7.5 (.295) | | | | | | | |
| | 10 | 5 | VD5.5-5A | FVD5.5-5A | | 5.3 (.209) | 9.5 (.374) | 26.7(1.051) | 7.5 (.295) | | | | | | | |
| | 1/4 | 6 | VD5.5-6A | FVD5.5-6A | | 6.4 (.252) | 13.5 (.532) | 32.7(1.287) | 12.2 (.480) | | | | | | | |
| | 5/16 | 8 | VD5.5-8A | — | | 8.4 (.331) | 13.5 (.532) | 32.7(1.287) | 12.2 (.480) | | | | | | | |

- Note: 1) The part numbers indicated in the above table are for products with a brazed seam.
 When ordering products with a butted seam, add the prefix "WS" to the part number (ex. VD2-4A → **VDWS2-4A**).
 2) To order products with nylon insulation, change the "V" in the part number prefix to "N" (ex. VD2-4A → **ND2-4A**).
 Because nylon absorbs moisture, care must be taken concerning storage.
 3) Delivery lead times may vary depending on the product. Contact JST for details.