


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

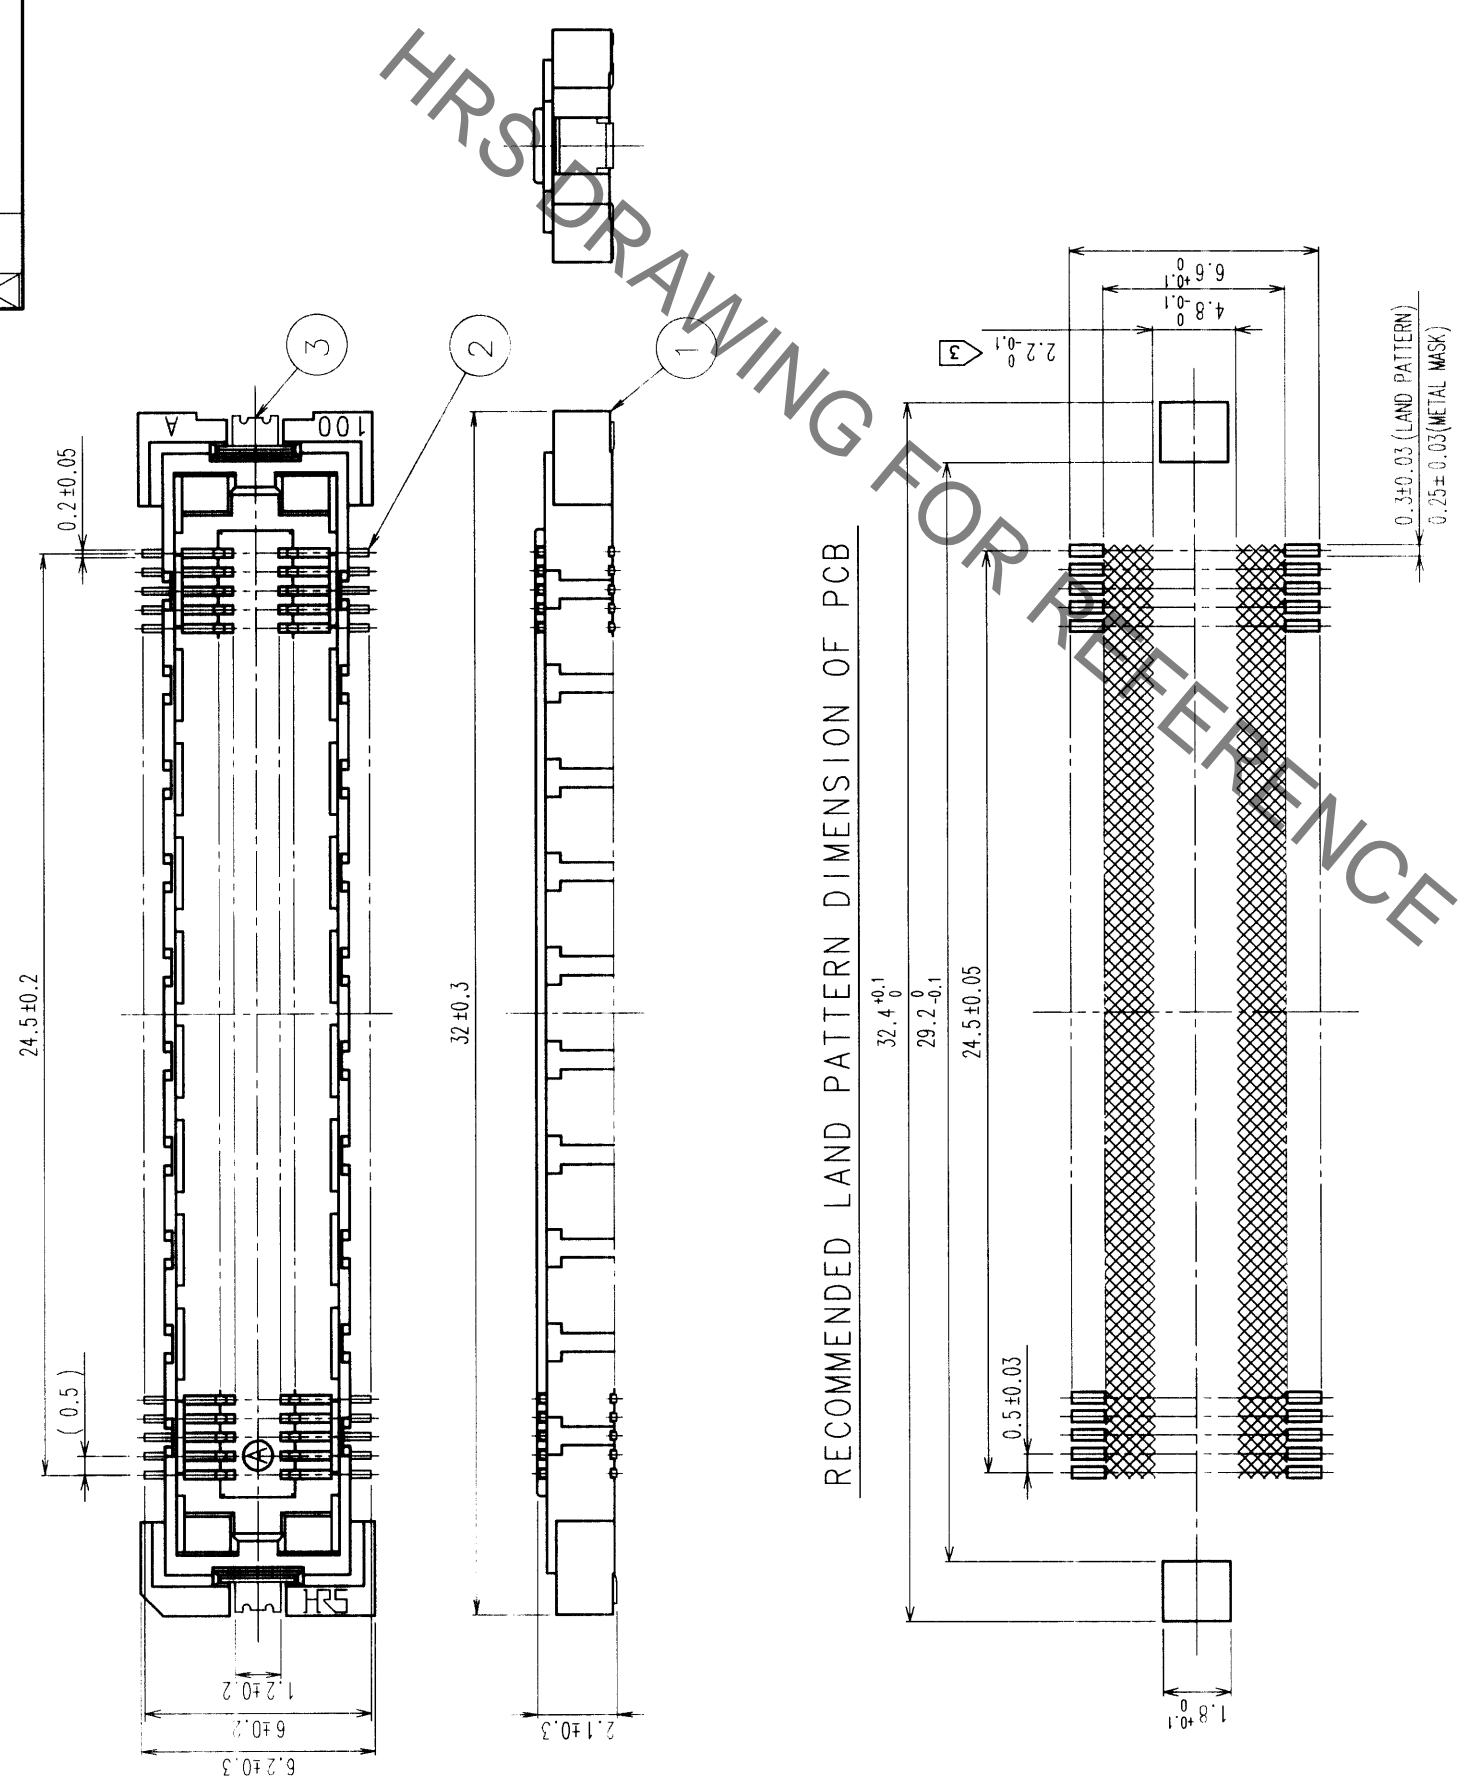

HRS DRAWING FOR REFERENCE

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)

CONTACT AREA: GOLD (0.1μm) OVER NICKEL		DRAWN		CHECKED		DESIGNED		TIN PLATED	
2	PHOSPHOR BRONZE	3	PHOSPHOR BRONZE	3	PHOSPHOR BRONZE	3	PHOSPHOR BRONZE	3	PHOSPHOR BRONZE
1	LCP	3	UL94V-0	3	UL94V-0	3	UL94V-0	3	UL94V-0
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	NO.
CL	CL	CL	CL	CL	CL	CL	CL	CL	CL
DRAWING NO.		PART NO.		APPROVED		RELEASED		DATE	
EDC3-152645		FX11B-100S-SV		J. Fujimura		00.01.17		00.01.17	
SCALE		UNITS		mm		mm		mm	
5 : 1		5 : 1		5 : 1		5 : 1		5 : 1	
HRS		HIROSE ELECTRIC CO., LTD.		HRS		HIROSE ELECTRIC CO., LTD.		HRS	
DRAWING NO.		PART NO.		CODE NO.		CODE NO.		CODE NO.	
EDC3-152645		FX11B-100S-SV		CL573-0753-0		CL573-0753-0		CL573-0753-0	
UNITS		UNITS		UNITS		UNITS		UNITS	
5 : 1		5 : 1		5 : 1		5 : 1		5 : 1	
mm		mm		mm		mm		mm	
mm		mm		mm		mm		mm	

TO PCK