

NOTE:
1. RETENTION FORCE IN BODY TO BE 1/2 LB MIN.

TCMD-XX-XX-XX




No OF POSITIONS PER ROW
-02 THRU -25

OPTION
-SR: STRAIN RELIEF
(NOT FOR SALE AS A COMPONENT, SOLD AS A CABLE ASSEMBLY ONLY)


LEAD STYLE
-01: USE T-1S14-01-T
-02: USE T-1S14-01-F

DO NOT SCALE FROM THIS PRINT

FIG. 1
(TCMD-T0-01 SHOWN)

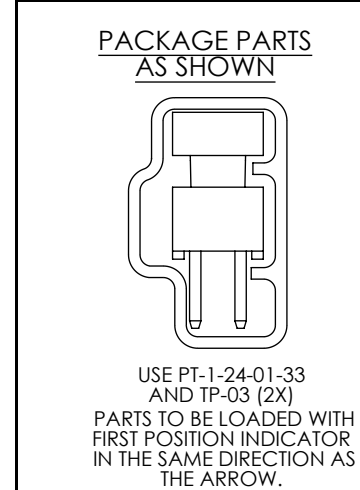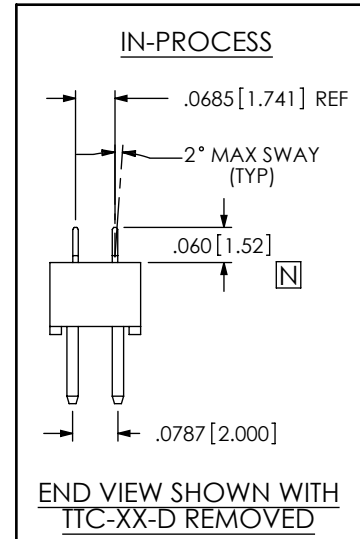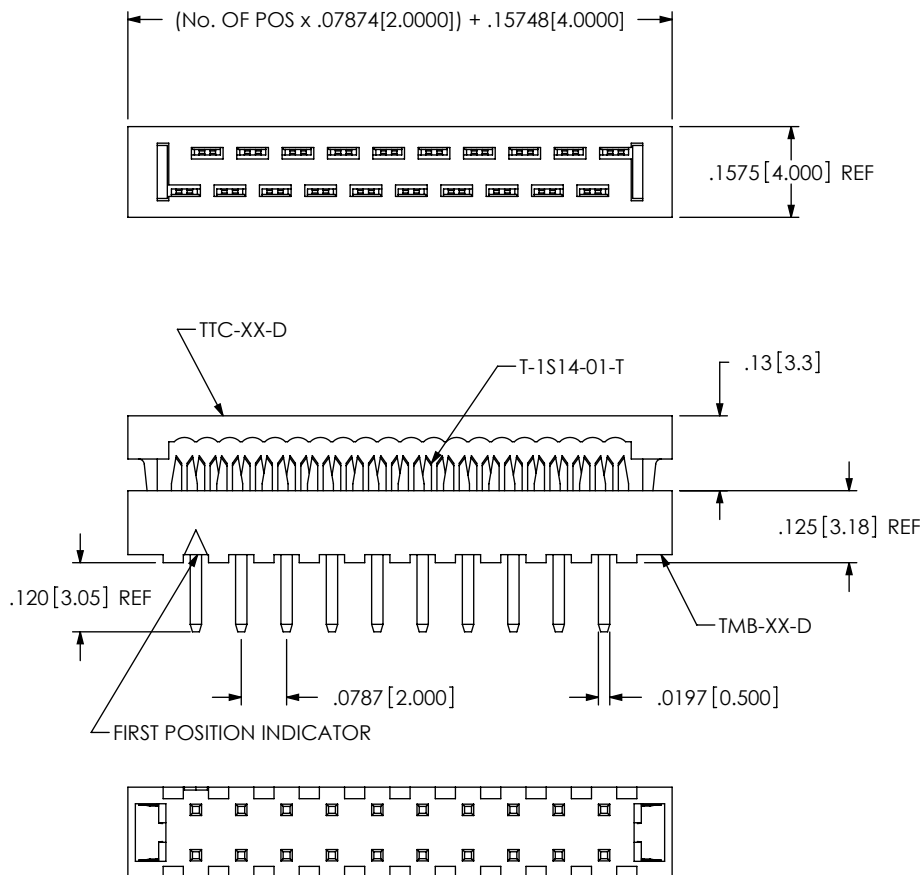

-SR: STRAIN RELIEF
(SAME AS FIG. 1, DIFFERENT AS SHOWN)

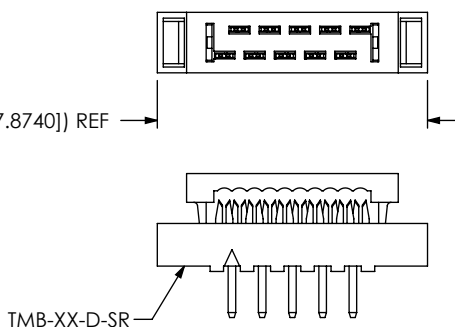

PARTS TO BE LOADED WITH FIRST POSITION INDICATOR TOWARD ARROW.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: $\pm .01$ [.3] 2°
.XXX: $\pm .005$ [.13]
.XXXX: $\pm .0020$ [.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 3:1
INSULATOR: VALOX 420 SEO. COLOR: BLACK
CONTACT OR TERMINAL: PHOS BRONZE, ALLOY 510
GRADE A SPRING TEMPER

DESCRIPTION: 2MM MALE IDC ASSEMBLY

DWG. NO. TCMD-XX-XX-XX

BY: B RAY 11/26/2007 SHEET 1 OF 1