


SPECIFICATIONS

Current Rating: 3A AC/DC
 Raing : AC,DC 250V
 Withstand Voltage : 1000V AC/Minute
 Insulation Resistance : 500 Megohsm Mln.
 Temperature Range : -25°C To +85°C
 Material : Nylon 66,UL 94V-0

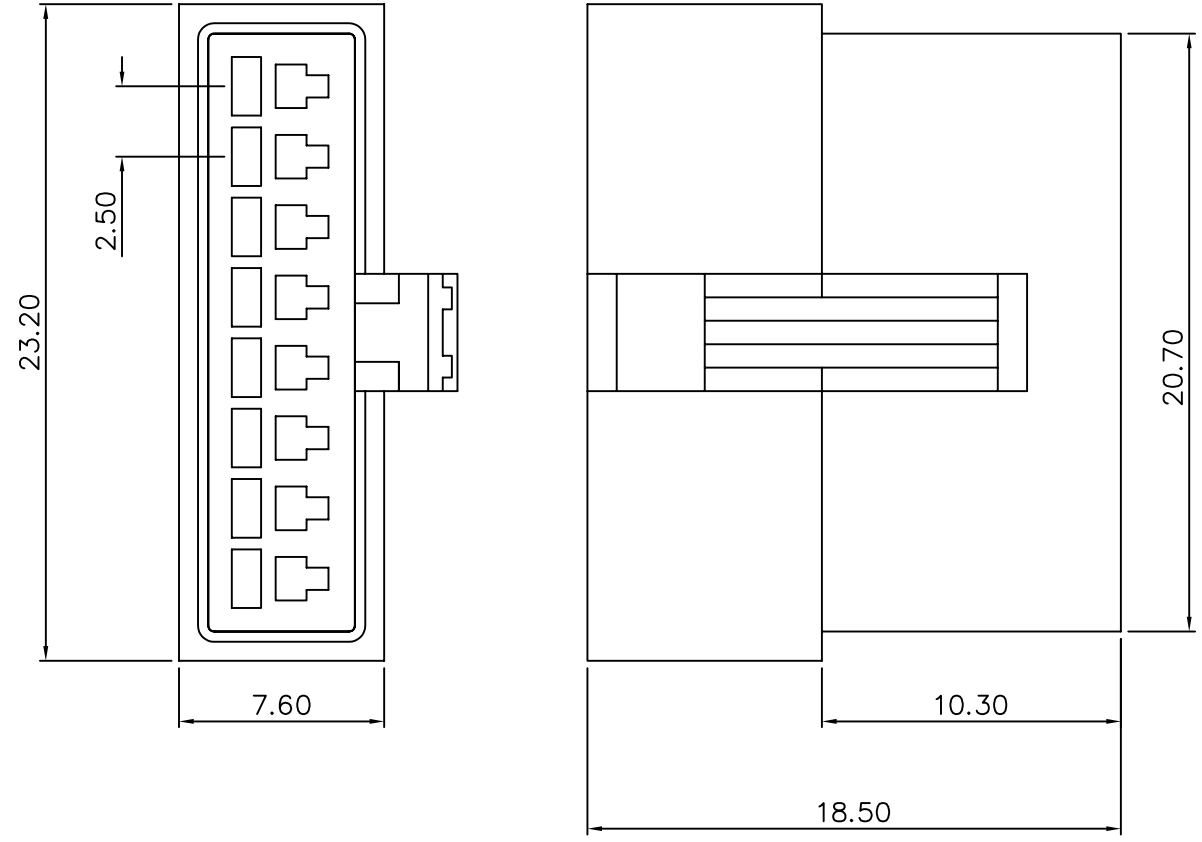

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART No. △ SM08P		MEI							
DRAWING No. SM08P		LHC							
SCALE		REV.		UNIT		NO. REV.	REVISIONS	CHK	DATE
NONE		A1		mm					
						△ A1	SM08S → SM08P	BECKY	2004/07/21
						△ A0	NEW RELEASE		