
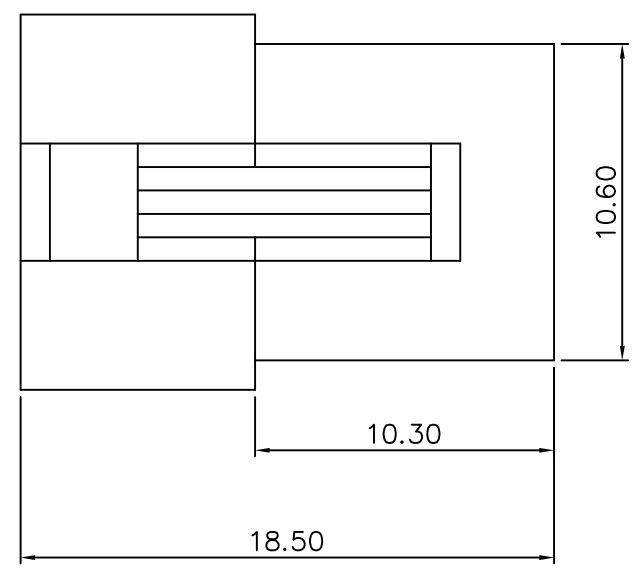


**SPECIFICATIONS**  
 Current Rating: 3A AC/DC  
 Raing : AC,DC 250V  
 Withstand Voltage : 1000V AC/Minute  
 Insulation Resistance : 500 Megohsm Mln.  
 Temperature Range : -25°C To +85°C  
 Material : Nylon 66,UL 94V-0

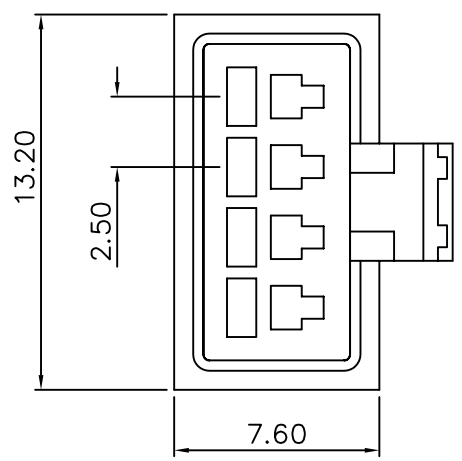

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART No. △ SM04P		MEI							
DRAWING No. SM04P		LHC							
SCALE		REV.		UNIT		NO.REV.	REVISIONS	CHK	DATE
NONE		A1		mm		△ A1	SM04S → SM04P	BECKY	2004/07/21
						△ A0	NEW RELEASE		