

#### AMP | AMP MCP Connector System

TE Internal #: 1-1718484-1 Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 25 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, Black, AMP MCP Connector System

#### View on TE.com >





Connector & Housing Type: Housing for Female Terminals Mating Tab Width: 1.5 mm, 2.8 mm [ .059 in, .11 in ] Connector System: Wire-to-Board, Wire-to-Device Number of Positions: 25

Centerline (Pitch): 4 mm, 5 mm [.157 in, .197 in ]

#### All AMP MCP, UNSEALED CONNECTOR HOUSING (187)



## Features

#### **Product Type Features**

Connector & Housing Shape	Rectangular	
Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Board, Wire-to-Device	
Sealable	No	
Hybrid Connector	Yes	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	25	
	3	
Number of Rows	3	
Number of Rows Electrical Characteristics	3	
	3 36 VDC	

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 25 Position, .157 in / . 197 in [4 mm / 5 mm] Centerline, Black, AMP MCP Connector System



## **Body Features**

Cable Exit Angle	180°	
Body Material	PBT GF	
Primary Product Color	Black	
Connector Code	A	
Contact Features		
Contact Size	1.5K, 2.8mm	
Contact Type	Receptacle	
Mating Tab Width	1.5 mm, 2.8 mm[.059 in][.11 in]	
Mechanical Attachment		
Mounting Feature	Without	
Terminal Position Assurance	No	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	

#### Housing Features

Centerline (Pitch)	4 mm, 5 mm[.157 in][.197 in]
Dimensions	
Product Width	26 mm[1.02 in]
Product Length	42.3 mm[1.66 in]
Product Height	24.3 mm[.956 in]
Row-to-Row Spacing	4.2 mm, 8.1 mm[.165 in][.318 in]
Usage Conditions	
Operating Temperature (Max)	120 °C[248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	900
Packaging Method	Box
Other	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 25 Position, .157 in / . 197 in [4 mm / 5 mm] Centerline, Black, AMP MCP Connector System



Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**



# Also in the Series AMP MCP Connector System

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 25 Position, .157 in / . 197 in [4 mm / 5 mm] Centerline, Black, AMP MCP Connector System



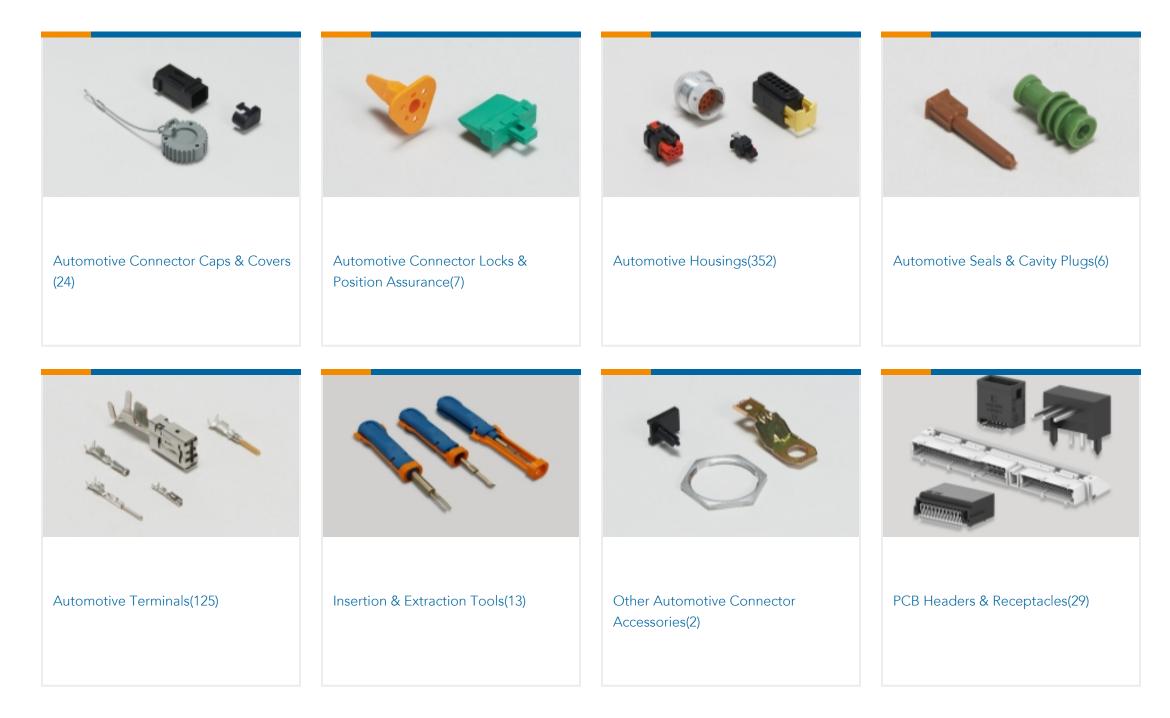

# Customers Also Bought



PLG, 64P, BLK, E, B	AMP MCP, UNSEALED CONNECTOR HOUSING	1X6 Fem unsealed LP assy Key B w /CPA	REC, 33P, BLK, N, RNG, 20, P
TE Part #2317001-1 26POS,MCON 1.2,REC HSG ASSY,SLD	TE Part #2358789-2 MACROS_GM E2UB JCSB SquibLok cable 180D	TE Part #2358789-3 MACROS_GM E2UB JCSB SquibLok cable 180D	TE Part #2359441-1 7POS,AMP MCP 2.8,REC HSG,UNSLD

TE Part #936568-2 SPT 2P PLUG ASSY BLK

## Documents

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 25 Position, .157 in / . 197 in [4 mm / 5 mm] Centerline, Black, AMP MCP Connector System



Product Drawings CARRIER FOR RECEPTACLE INSERTS

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1718484-1\_D\_c-1-1718484-1-d.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1718484-1\_D\_c-1-1718484-1-d.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-1718484-1\_D\_c-1-1718484-1-d.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

German

Product Environmental Compliance Product Compliance

English

#### Product Compliance

English