



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **5.08 mm [ .2 in ]**

Features

Product Type Features

|                                   |              |
|-----------------------------------|--------------|
| Rectangular Power Connector Type  | Housing      |
| Connector & Housing Type          | Plug         |
| Connector System                  | Wire-to-Wire |
| Sealable                          | No           |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Positions | 4 |
| Number of Rows      | 1 |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Contact Features

|                                  |         |
|----------------------------------|---------|
| Contact Layout                   | Inline  |
| Contact Retention Within Housing | Without |
| Contact Type                     | Socket  |



Termination Features

|                                    |       |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

Mechanical Attachment

|                         |                            |
|-------------------------|----------------------------|
| Panel Mount Feature     | Without                    |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 5.08 mm[.2 in] |
| Housing Color      | Natural        |
| Housing Material   | Nylon          |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Identification Marking

|                                |      |
|--------------------------------|------|
| Circuit Identification Feature | With |
|--------------------------------|------|

Industry Standards

|                        |                               |
|------------------------|-------------------------------|
| UL Flammability Rating | UL 94V-2                      |
| Glow Wire Rating       | Standard Part - Not Glow Wire |
| UL Rating              | Certified, Recognized         |
| Agency/Standard Number | E28476                        |
| CSA File Number        | LR16455                       |
| VDE Tested             | No                            |
| Agency/Standard        | CSA, UL                       |

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Method   | Package |
| Packaging Quantity | 4000    |

Other

|              |                   |
|--------------|-------------------|
| For Use With | Pin (Cap) Housing |
|--------------|-------------------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2022 (223)<br>Candidate List Declared Against: JAN 2022 (223)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 770846-1  
04P CMNL HDR ASSY R/A BLK HT

TE Part # 60619-5  
CMNL SOK AUBR L/P

TE Part # 60617-5  
CMNL SOK AUBR L/P

TE Part # 60618-5  
CMNL PIN AUBR L/P

TE Part # 60617-4  
CMNL SOK PTPPHBZ L/P

TE Part # 61174-1  
CMNL PIN L/P PTBR

TE Part # 61173-1  
CMNL SOK 30-22 PTBR L/P

TE Part # 60619-1  
CMNL SOK PTPBR L/P



TE Part # 60620-1  
CMNL PIN 20-14 TPBR L/P



TE Part # 60617-1  
CMNL SOK SNBR L/P



TE Part # 1-480426-0  
04P CMNL CAP HSG F/H NATL



TE Part # 794236-1  
04P CMNL HDR ASSY V0



TE Part # 174804-1  
M-N-L PIN HDR W/FIX BELT H 4P



TE Part # 60620-4  
CMNL PIN 20-14 TPPHBZ L/P



TE Part # 1586515-2  
04P CMNL HDR ASSY PC UL94 LF



TE Part # 163304-2  
MATENLOK SOCKET SDW



TE Part # 163305-2  
MATENLOK PIN SDW



TE Part # 60619-4  
CMNL SOK PTPHBZ L/P



TE Part # 350211-1  
04P CMNL HDR ASSY PC



TE Part # 1586627-1  
04P CMNL HDR VRT W/DH LF

Also in the Series | Commercial MATE-N-LOK




Connector Contacts(26)



Crimp Wire Pins, Tabs & Ferrules(3)



Insertion & Extraction Tools(5)

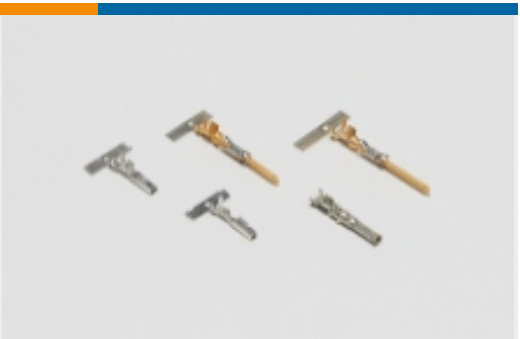

Power Contacts(129)



Rectangular Caps & Covers(2)



Rectangular Connector Housings(17)



Rectangular Connector Seals(1)



Rectangular Power Connectors(170)



Standard Circular Connectors(4)



Standard Rectangular Connectors(10)



Wire-to-Board Connector Contacts(1)

Customers Also Bought



TE Part #T4161220005-005  
RPC-M12-MR-5CON-PUR-5.0SH



TE Part #60620-1  
CMNL PIN 20-14 TPBR L/P



TE Part #163304-2  
MATENLOK SOCKET SDW



TE Part #163305-2  
MATENLOK PIN SDW



TE Part #1-480305-0  
03P CMNL CAP HSG F/H NATL




TE Part #1-480319-0  
02P CMNL CAP HSG NATL



TE Part #61314-1  
CMNL SOK 24-18 TPBR



TE Part #2-1879353-2  
RR02 5% 33K AMMO

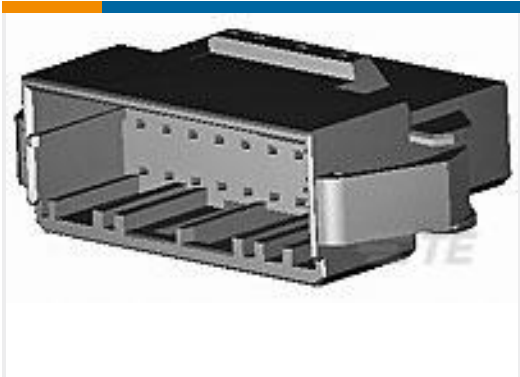

TE Part #2-1903131-4  
DYNAMIC 1200D TAB HSG 8P P/M  
BLACK Y



TE Part #1-480287-0  
12P CMNL PLUG HSG M/M NATL

Documents

Product Drawings

04P CMNL PLUG HSG F/H NATL

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_1-480424-0\_AG.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1-480424-0\\_AG.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-480424-0\\_AG.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT\\_SHELL\\_PIN\\_SOCKET\\_CONNECTORS\\_STANDARD\\_DENSITY](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD\\_1-480424-0\\_013020191136\\_dmtec](#)

English

[MD\\_1-480424-0\\_013020191136\\_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[Agency Approval Document](#)

English