


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
11/18/99	-	ISSUED		NT	DG

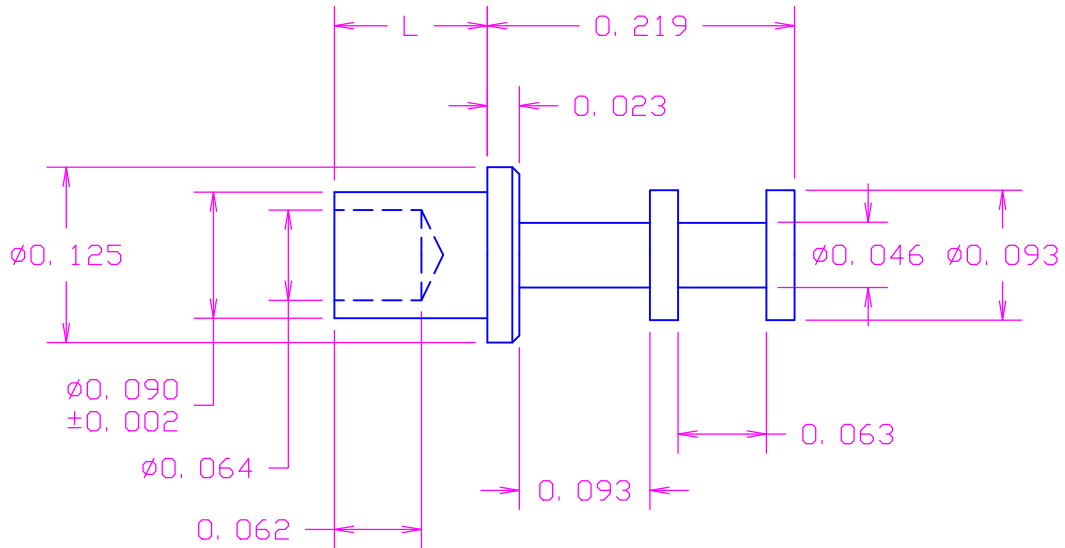

RECOMMENDED MOUNTING HOLE .094 DIA. (#3/32 DRILL)

MATERIAL: BRASS PER ASTM B16,

ALLOY C 36000, 1/2 HARD

FINISH(XX): (01)- .0003"MIN. SILVER PER QQ-S-365,


TYPE II, GRADE A WITH NON-CHROMATE PRESERVATIVE

(03)- .000010"MIN. GOLD PER MIL-G-45204,

TYPE II, GRADE C, OVER .0001"MIN. NICKEL

PART NUMBER:	L
10-209-1-XX	.078
10-209-2-XX	.109
10-209-3-XX	.141
10-209-4-XX	.172
10-209-6-XX	.234
10-209-8-XX	.297

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD		ELECTRONICS CORPORATION
DECIMAL ± .005	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL ± 1/64	TITLE TERMINAL		
ANGULAR ± 5°	DATE 11/18/99	DRAWING NUMBER 10-209-X-XX PLATING	