

product: DELPHI PN 15396853
 material: CUNISI
 surface: F.SN3
 material thickness: 0,38 mm
 cross section [mm²]: 1,5 | 2,5

strip length: 4,50 mm
 cable type: FLRY-B
 insulation ø [mm]: 2,20 - 3,00
 seal:

**Uncontrolled
 Copy**
 For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-B	1,5	30 x 0,26	2,30	200	1,80	2,85	3,25	3,70		
FLRY-B	2,5	50 x 0,26	2,85	250	2,00	2,85	3,45	3,75		

core:
 C-2.75-3.5-19
 DPN 10713702


insulation:
 I-3.50-3.0-12
 DPN 10713832

anvil:

two piece anvil:
 AC-2.75-3.75
 DPN 10764131
 AI-3.50-4.4-0.3-A
 DPN 10770087

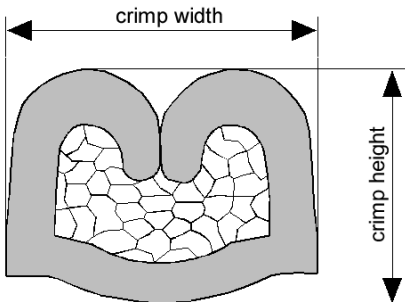


DELPHI PN 15396853

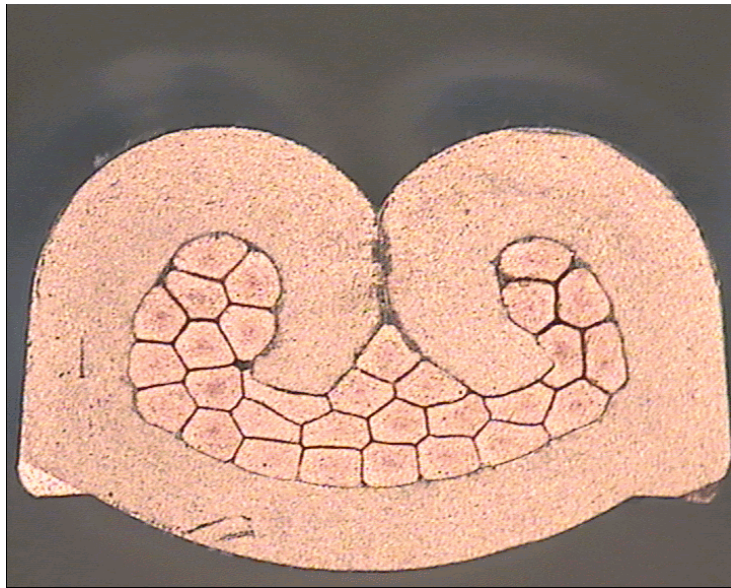

cable:
1,50 mm² = 30 x 0,26 mm

crimp height:
1,80 mm

crimp width:
2,85 mm

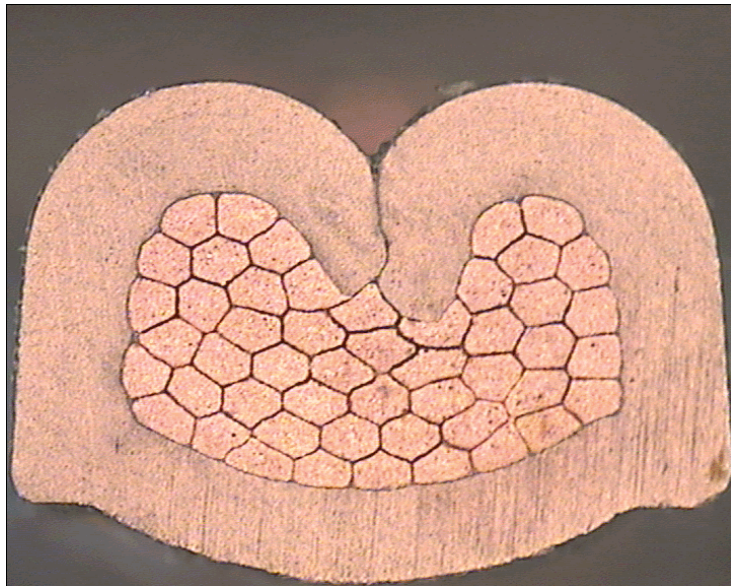

cable:
2,50 mm² = 50 x 0,26 mm

crimp height:
2,00 mm

crimp width:
2,85 mm