




Terminals & Splices > Quick Disconnects

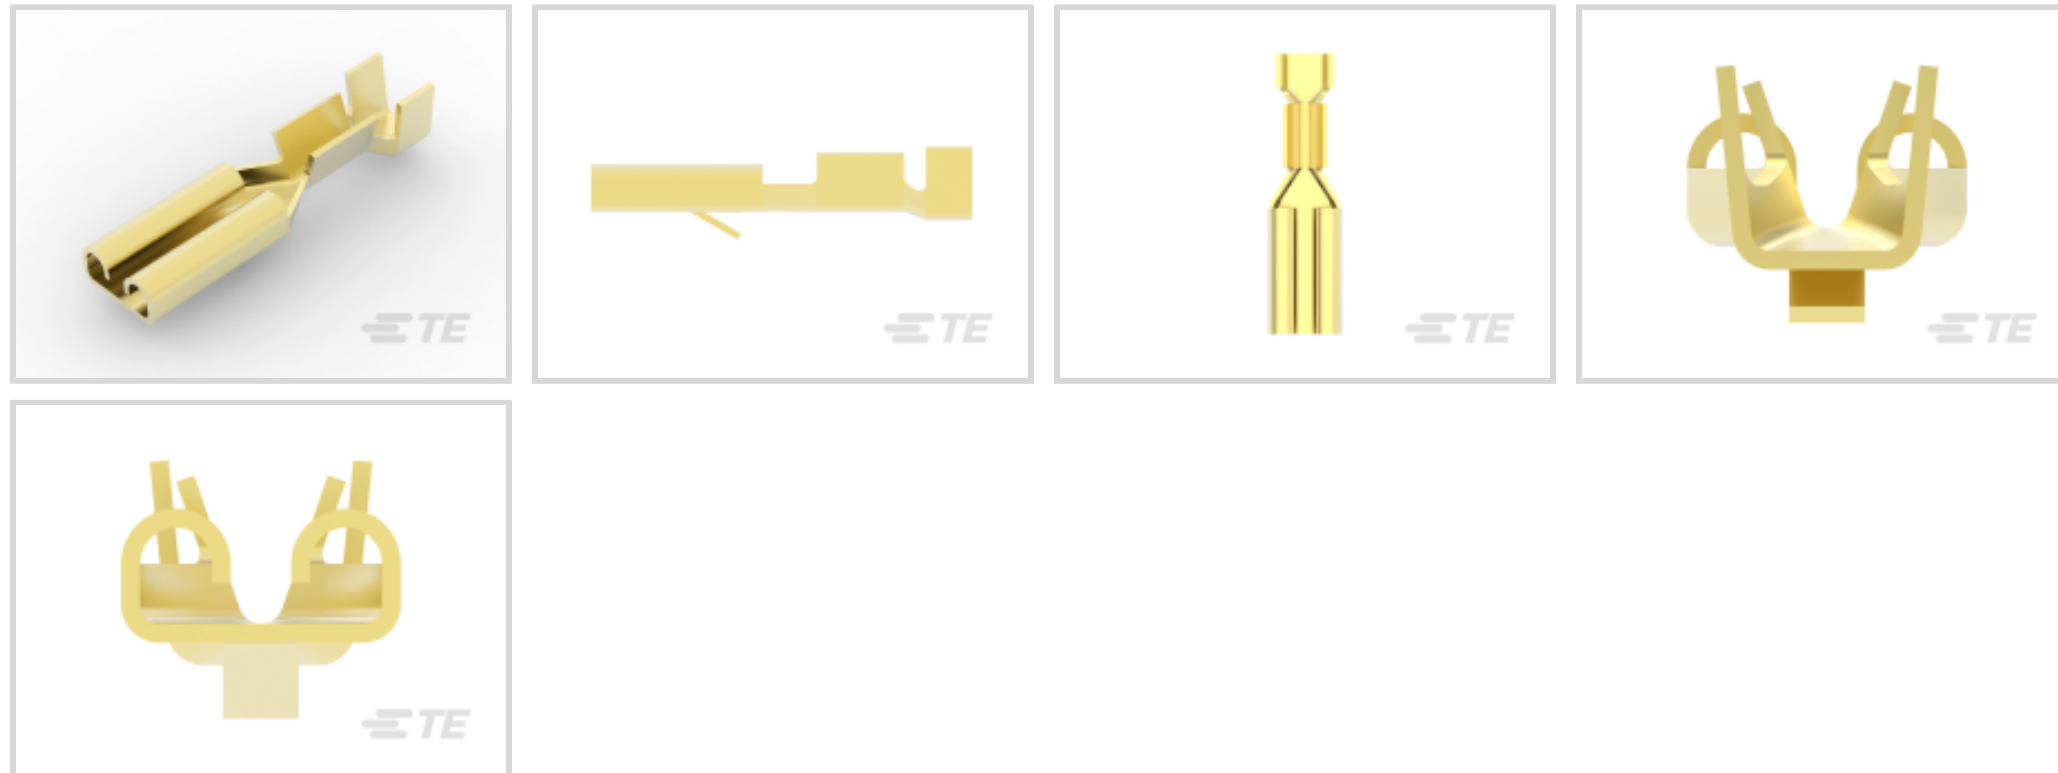

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .51 mm²

Mating Tab Width: 2.8 mm [.11 in]

Mating Tab Thickness: .51 mm [.02 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm [.11 in]
Mating Tab Thickness	.51 mm [.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

Mating Retention Type	Locking Lance
-----------------------	---------------

Wire Insulation Support	With
-------------------------	------

Dimensions

Accepts Wire Insulation Diameter Range	1.3 – 2 mm [.051 – .078 in]
--	-----------------------------

Overall Length	14 mm [.551 in]
----------------	-----------------

Receptacle Terminal Stock Thickness	.25 mm [.01 in]
-------------------------------------	-----------------

Wire Size	.32 – .51 mm ²
-----------	---------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]
-----------------------------	-----------------------------

Packaging Features

Packaging Quantity	10000
--------------------	-------

Packaging Method	Strip/Reel
------------------	------------

Other

Comment	According to DIN 46340, Part 1
---------	--------------------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1579007-4
EXTRACTION TOOL



TE Part # 4-1579007-3
EXTRACTION TOOL KIT



TE Part # 63509-1
FF 187 REC 20-16AWG TPBR



TE Part # 2-2150182-1
OCEAN_2.0_Applicator-E-055F090F



TE Part # 2-2150182-2
OCEAN_2.0_Applicator-E-055F090F



TE Part # 2150182-1
OCEAN_2.0_Applicator-E-055F090F



TE Part # 2150182-2
OCEAN_2.0_Applicator-E-055F090F



TE Part # 574868
DAHT TAPER PIN FASTON 24-22 ASSY

REPRESENTATION ONLY




TE Part # 63580-1
FF 125 REC 22-18AWG TPBR



TE Part # 7-2150182-1
OCEAN_2.0_Applicator-E-055F090F



TE Part # 7-2150182-2
OCEAN_2.0_Applicator-E-055F090F



TE Part # 7-2150182-7
OCEAN_2.0_SPARE_PART_KIT-055F090F

KIT

REPRESENTATION ONLY



TE Part # 734520-1
.110 FAST.HANDTOOL

Also in the Series | FASTIN-FASTON 110



Automotive Housings(1)




Automotive Terminals(4)



Crimp Terminal Housings(34)



Insertion & Extraction Tools(3)

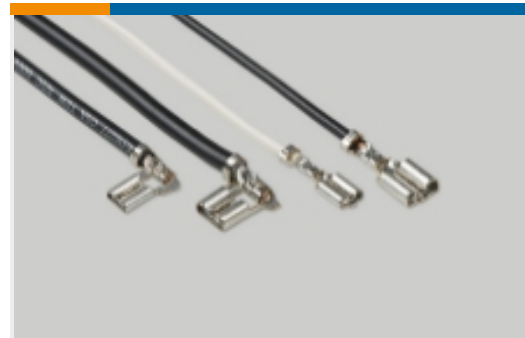


Quick Disconnects(83)


Customers Also Bought




TE Part #2227023-1
CAGE ASSY PRESS FIT, SFP

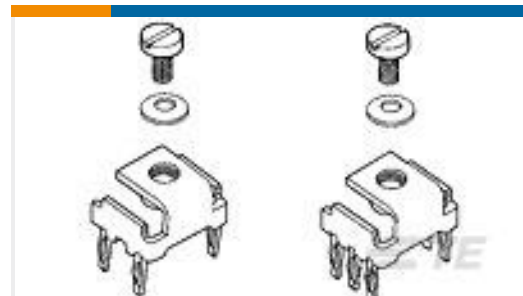


TE Part #216907-1
.250 POWER TERM.A.P

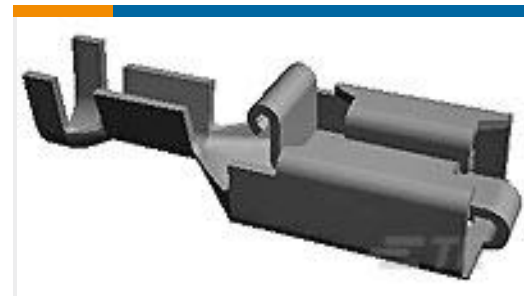


TE Part #1-160759-2
250 PL MKI REC. 20-15AWG PTPB

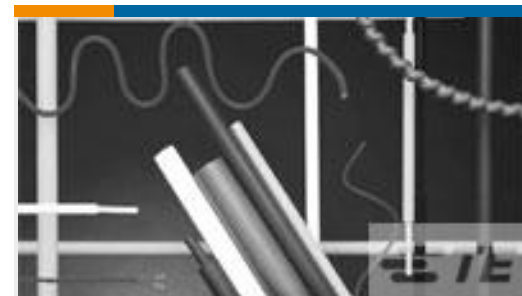


TE Part #5069794007
CGPT-1.2/0.6-0-SP

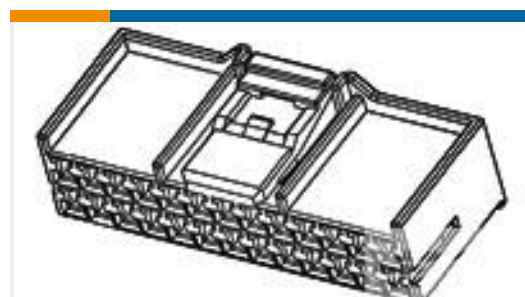


TE Part #936201-1
090III 16P PLUG ASSY

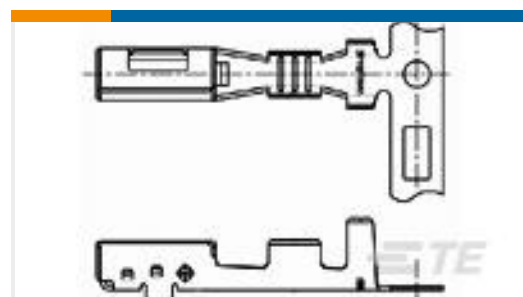

TE Part #1743655-1
090III MLC REC(M) CONT

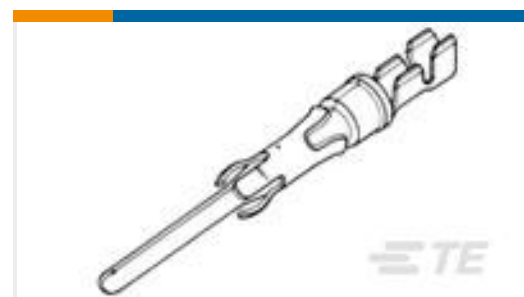


TE Part #164161-9
.062 PIN ASSY.3+

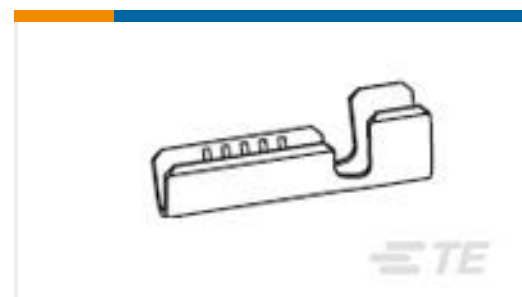

TE Part #160644-3
SPLICE 20-15 AWG .016 TPBR



TE Part #215598-1
4P.CI-2 PIN HSG.

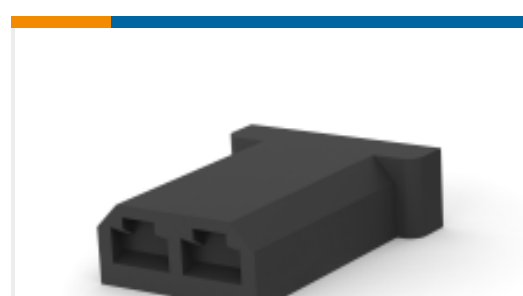

TE Part #925014-1
FF 110 HOUSING RECEPTACLE PA
6.6 BLACK



Documents

Product Drawings

[FF 110 SR. REC 22-20AWG TPBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_160366-2_AS_c-160366-2-as.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_160366-2_AS_c-160366-2-as.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_160366-2_AS_c-160366-2-as.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Environmental Compliance

[TE Material Declaration](#)

English