


AMPMODU

TE Internal #: 1658525-6 Ribbon Cable Connectors, Wire-to-Board, 10 Position, .1 in [2.54 mm] Centerline, Vertical, Through Hole - Solder, Insulation Displacement (IDC), 2 Row

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors

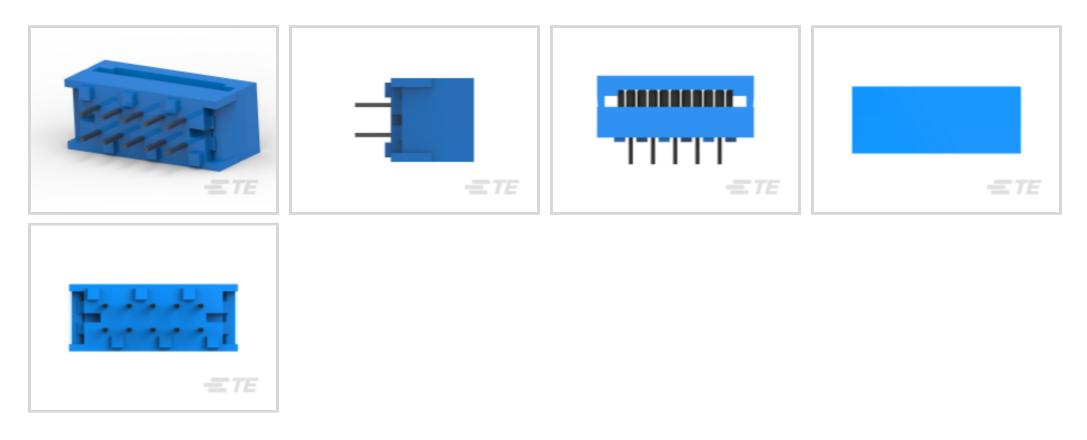

Connector System: Wire-to-Board

Number of Positions: 10

Centerline (Pitch): 2.54 mm [.1 in]

PCB Mount Retention: Without

PCB Mount Orientation: Vertical

Features

E T E connectivity

Product Type Features

Ribbon Cable Connector Header Type	Shrouded
Connector Product Type	Connector Assembly
Connector System	Wire-to-Board
Connector & Housing Type	Plug
Connector & Contact Terminates To	Printed Circuit Board, Wire & Cable
Configuration Features	
Number of Positions	10
PCB Mount Orientation	Vertical
Number of Rows	2
Contact Features	
PCB Contact Termination Area Plating Material Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin

Ribbon Cable Connectors, Wire-to-Board, 10 Position, .1 in [2.54 mm] Centerline, Vertical, Through Hole - Solder, Insulation Displacement (IDC), 2 Row



PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.36 mm[.014 in]
Rectangular Termination Post & Tail Width	.46 mm[.018 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
PCB Mount Retention	Without
Mating Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Color	Blue
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application

Signal

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Ribbon Cable Connectors, Wire-to-Board, 10 Position, .1 in [2.54 mm] Centerline, Vertical, Through Hole - Solder, Insulation Displacement (IDC), 2 Row



Solder Process Capability


Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



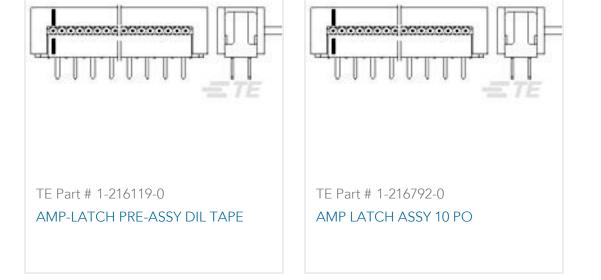


Customers Also Bought



Ribbon Cable Connectors, Wire-to-Board, 10 Position, .1 in [2.54 mm] Centerline, Vertical, Through Hole - Solder, Insulation Displacement (IDC), 2 Row



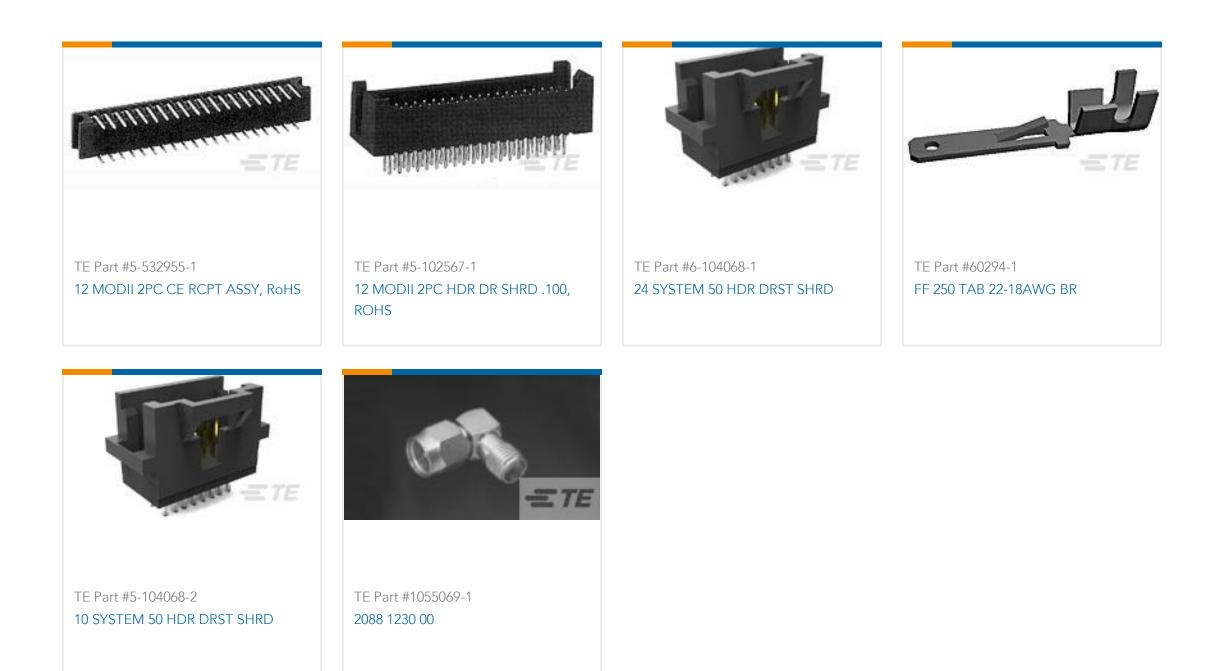

Documents

Product Drawings 622-1053LF, PCB IDC, LEAD FREE

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1658525-6_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1658525-6_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1658525-6_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Ribbon Cable Interconnect Solutions

English

Product Environmental Compliance MD_1658525-6_03112013651_dmtec

English

MD_1658525-6_03112013651_dmtec

English

Ribbon Cable Connectors, Wire-to-Board, 10 Position, .1 in [2.54 mm] Centerline, Vertical, Through Hole - Solder, Insulation Displacement (IDC), 2 Row

