




Terminals & Splices > Quick Disconnects

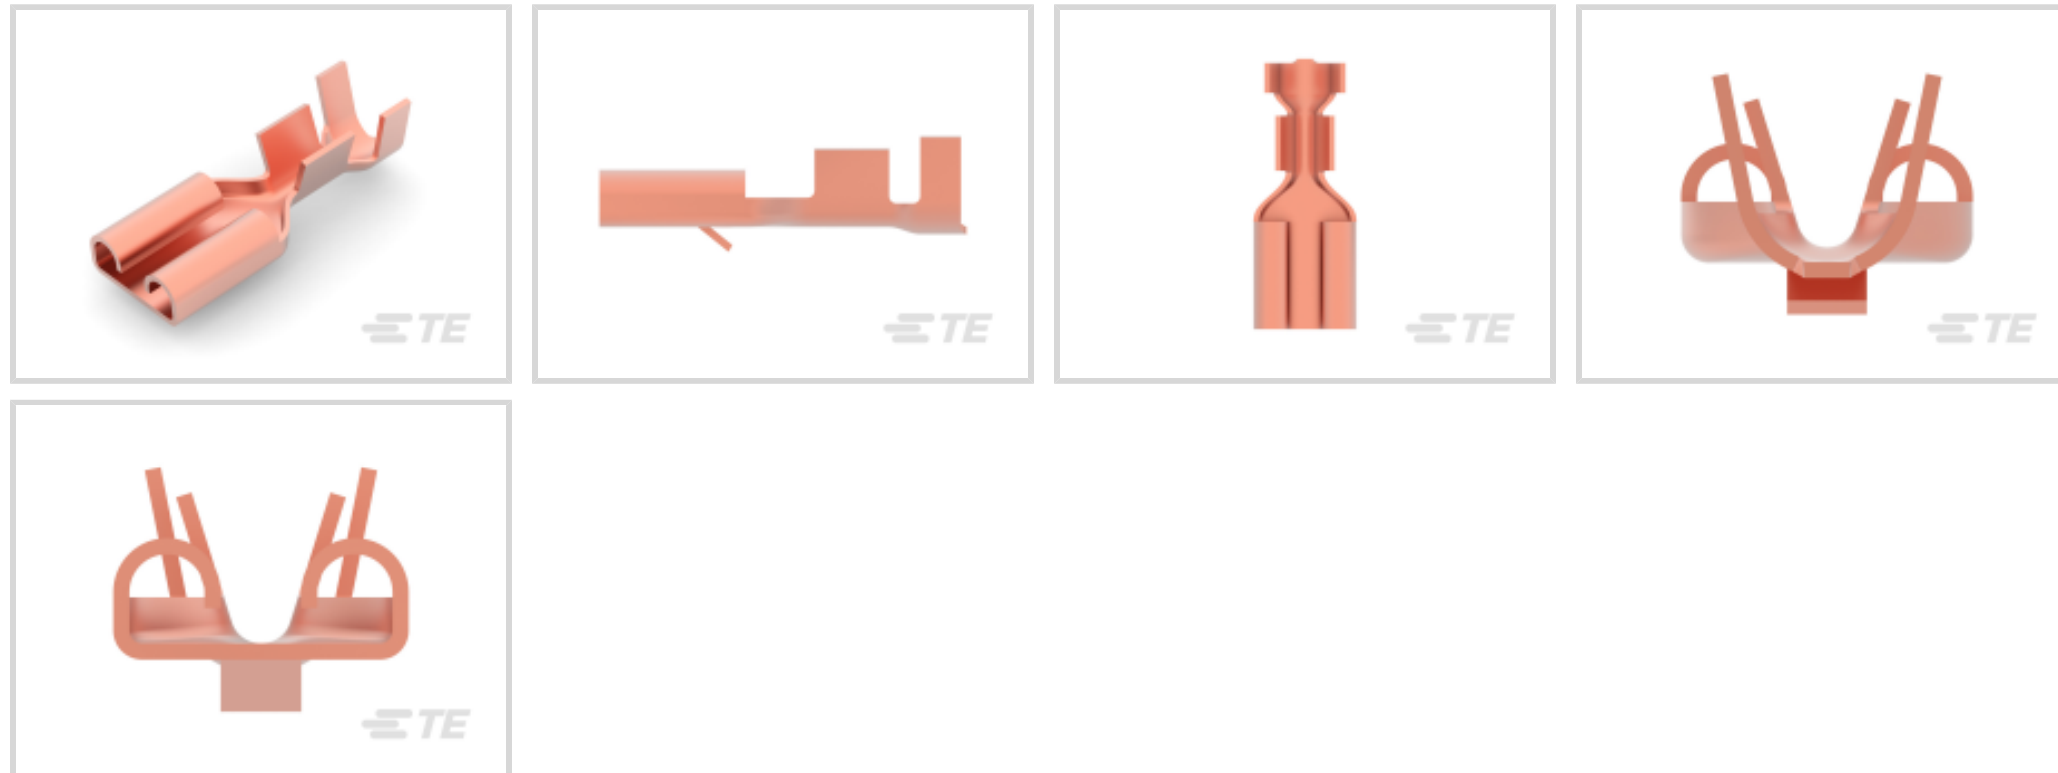

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1.03 – 2.62 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Unplated
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

	.057 in
Mating Retention Type	Locking Lance
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	3 – 4 mm [.118 – .157 in]
Overall Length	19.2 mm [.755 in]
Receptacle Terminal Stock Thickness	.41 mm [.016 in]
Wire Size	1.03 – 2.62 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Other

Comment	Reeled with paper cover
---------	-------------------------

Product Compliance











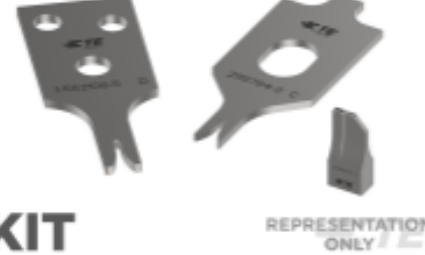
[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 151667-4 FF 375 REC TERMINAL 11-10 AWG PBR</p>	 <p>TE Part # 160950-3 FF 250 REC TPBR SOLDERING</p>	 <p>TE Part # 2-2150235-1 OCEAN_2.0_Applicator-E-110F180F</p>	 <p>TE Part # 2-2150235-2 OCEAN_2.0_Applicator-E-110F180F</p>
 <p>TE Part # 2150235-1 OCEAN_2.0_Applicator-E-110F180F</p>	 <p>TE Part # 2150235-2 OCEAN_2.0_Applicator-E-110F180F</p>	 <p>TE Part # 281197-5 FF 187 REC 1.0-2.5MM2 PTBR (RE REELING)</p>	 <p>TE Part # 281197-6 FF 187 REC 1.0-2.5MM2 PTBR</p>
 <p>TE Part # 7-2150235-1 OCEAN_2.0_Applicator-E-110F180F</p>	 <p>TE Part # 7-2150235-2 OCEAN_2.0_Applicator-E-110F180F</p>	 <p>KIT REPRESENTATION ONLY</p> <p>TE Part # 7-2150235-7 OCEAN_2.0_SPARE_PART_KIT- 110F180F</p>	

Also in the Series | **FASTIN-FASTON 250**




Crimp Terminal Housings(218)



Insertion & Extraction Tools(2)



PCB Terminals(2)

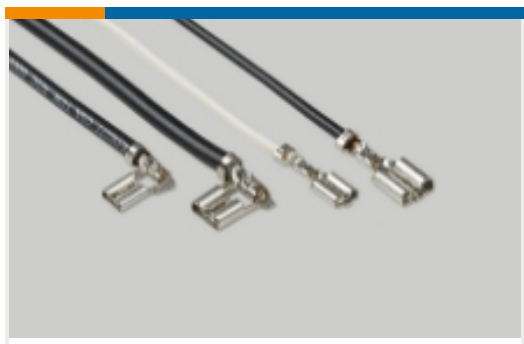

Quick Disconnects(255)


Customers Also Bought



TE Part #1744525-3
EP 03P RA-HDR ASY NO 2 PIN




TE Part #917688-4
SIGNAL DOUBLE LOCK PLUG HSG 4P
YELLOW

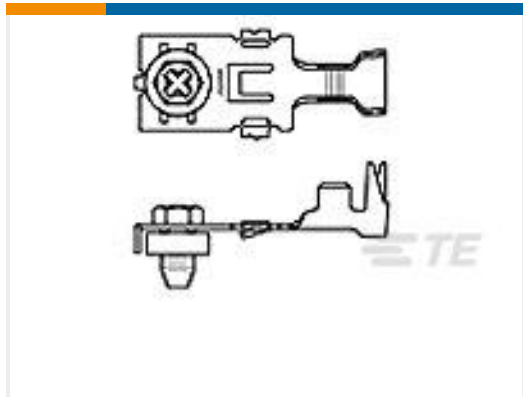

TE Part #520936-1
POWER RING 250 ASY 16-10 AWG NL



TE Part #2232957-1
250 POSITIVE REC EX MK-2

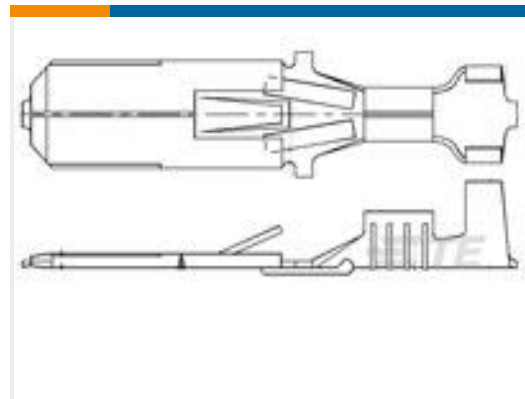

TE Part #280081-1
FF 250 TAB 18-13 AWG BR



TE Part #1-2232826-3
SGI2.0 header assembly TH 3P,key A,
NTL



TE Part #1-2232979-3
SGI2.0 PLUG ASSEMBLY 3P,KEY A



TE Part #171370-6
CLUSTER BLOCK HSG 66 0023



TE Part #2232511-5
3P, RAST 5 TAB HEADER, THV



TE Part #284932-8
DUOPLUG STD FEMALE CONN., 8
POS.

Documents

Product Drawings

[FF 250 REC 0.5-2.5MM2 PB](#)

CAD Files

[3D PDF](#)

[3D](#)

Customer View Model

[ENG_CVM_CVM_160824-6_M_c-160824-6-m.2d_dxf.zip](#)

English



Customer View Model

[ENG_CVM_CVM_160824-6_M_c-160824-6-m.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_160824-6_M_c-160824-6-m.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[EB**General Application Specification for Open Barrel Terminals](#)

English

[Application Specification](#)

English