


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1703901000](#)
Status: **Active**
Overview: Impact Backplane Connector and Cable Assembly System
Description: Impact 85 Ohm Plus 4 Pair Mezzanine Receptacle, Stack Height 18.00mm, Unguided, 10 Columns, 120 Circuits, Lead Free

Documents:

3D Model	Application Specification AS-76060-990-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-4001-001 (PDF)
3D Model (PDF)	Symbol Footprint Data SYM-170390-1000 (PDF)
Product Specification PS-170540-999-001 (PDF)	RoHS Certificate of Compliance (PDF)

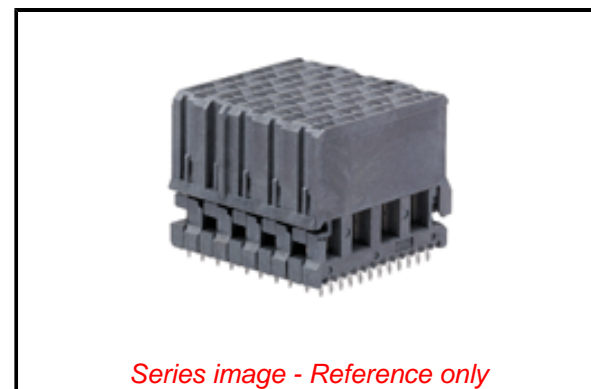

Series image - Reference only

Agency Certification

UL E29179

General

Product Family	Backplane Connectors
Series	170390
Application	Mezzanine
Application Tooling Documents	TM-622018799
Component Type	PCB Receptacle
Electrical Model	Yes
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	887191271712

Physical

Circuits (Loaded)	120
Circuits (maximum)	120
Color - Resin	Gray
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	9.262/g
Number of Columns	10
Number of Pairs	4
Number of Rows	12
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.35mm, 1.90mm
Pitch - Termination Interface	1.35mm, 1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +85°C

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[170390](#) Series

Mates With

[170335](#) Impact 85 Ohm Plus Vertical Header

Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	85Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990-001
Electrical Model Document	EE-170390-0318
Packaging Specification	PK-70873-4001-001
Product Specification	PS-170540-999-001
S-Parameter Model	SP-170390-0025
Sales Drawing	SD-170390-0001-001
Symbol/Footprint Data	SYM-170390-1000

This document was generated on 07/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION