

## Positive Lock | Positive Lock 250

TE Internal #: 170266-2

Quick Disconnects, Receptacle, 12 - 10 AWG Wire Size, 3.31 - 5.26 mm<sup>2</sup> Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass,

Positive Lock 250

View on TE.com >



Terminals & Splices > Quick Disconnects











Quick Disconnect Terminal Type: Receptacle

Wire Size: 3.31 – 5.26 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## **Features**

# **Product Type Features**

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Discrete Wire
Insertion Force	Low

### **Contact Features**

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Mechanical Attachment

Mating Retention Type	Dimple	



Extraction Force	7 – 100 Newton
Wire Insulation Support	With
Dimensions	
Accepts Wire Insulation Diameter Range	3.81 – 5.08 mm[.15 – .2 in]
Overall Length	23 mm[.905 in]
Receptacle Terminal Stock Thickness	.6 mm[.023 in]
Wire Size	3.31 – 5.26 mm <sup>2</sup>
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Industry Standards	
UL Rating	Recognized
Packaging Features	
Packaging Quantity	1000
Packaging Method	Loose Piece/Carton

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts









# Also in the Series | Positive Lock 250



Automotive Terminals(1)




Crimp Terminal Housings(203)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)

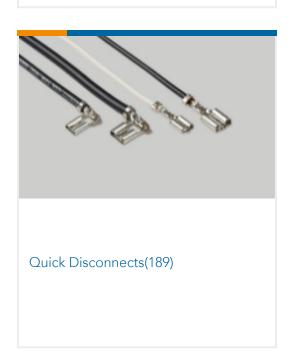

Customers Also Bought

Quick Disconnects, Receptacle, 12 – 10 AWG Wire Size, 3.31 – 5.26 mm<sup>2</sup> Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, Positive Lock 250







TE Part #440055-4 2.0MM,HDR,4POS,R/A















### **Documents**

## **Product Drawings**

POSITIVE LOCK RECEPTACLE ELECTRO TPBR

Japanese

#### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_170266-2\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_170266-2\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_170266-2\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

Quick Disconnects, Receptacle, 12 – 10 AWG Wire Size, 3.31 – 5.26 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, Positive Lock 250



**Product Specification** 

English

1-Position, Positive Lock Connector

English