




Power Double Lock

TE Internal #: 179861-6  
Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4  
Position, .256 in [6.5 mm] Centerline, Wire & Cable, UL 94V-0,  
Power Double Lock

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

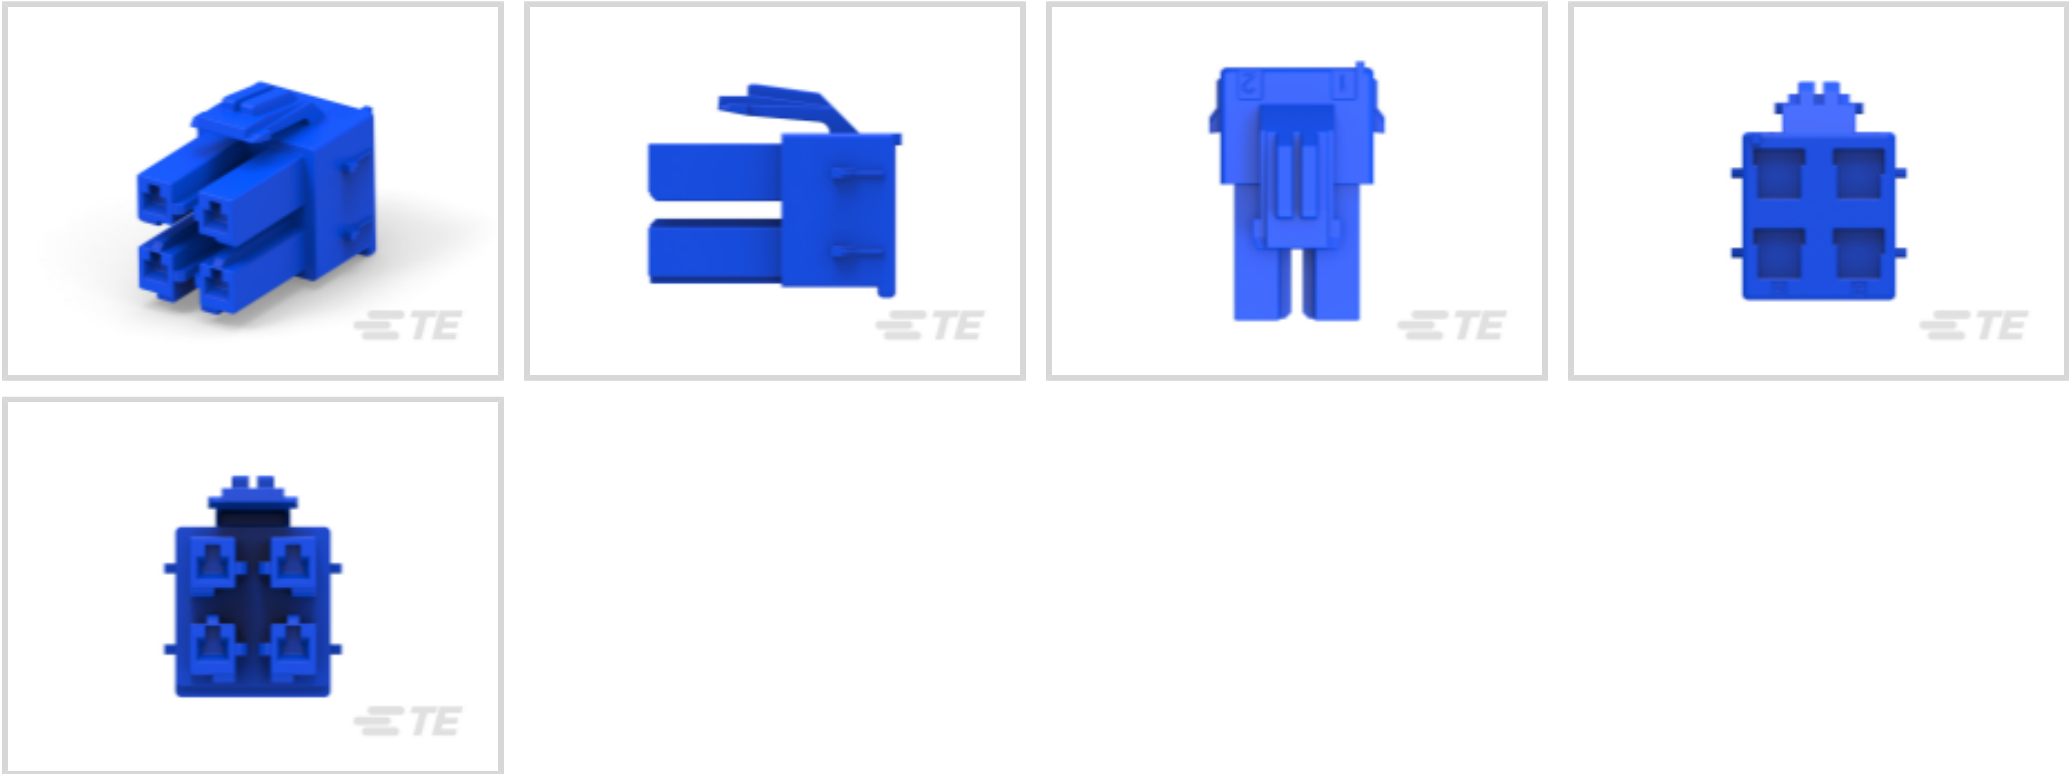

Rectangular Power Connector Type: **Housing**  
Connector & Housing Type: **Plug**  
Connector System: **Wire-to-Wire**  
Number of Positions: **4**  
Centerline (Pitch): **6.5 mm [ .256 in ]**

[All STD Temp Power Double Lock Plug \(68\)](#)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Power Positions	4
Number of Signal Positions	0
Number of Rows	2

Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------



Contact Features

Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	6.5 mm[.256 in]
Housing Color	Blue
Housing Material	Nylon 6/6

Dimensions

Row-to-Row Spacing	6.5 mm[.256 in]
--------------------	-----------------

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Method	Bag
Packaging Quantity	200

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223)











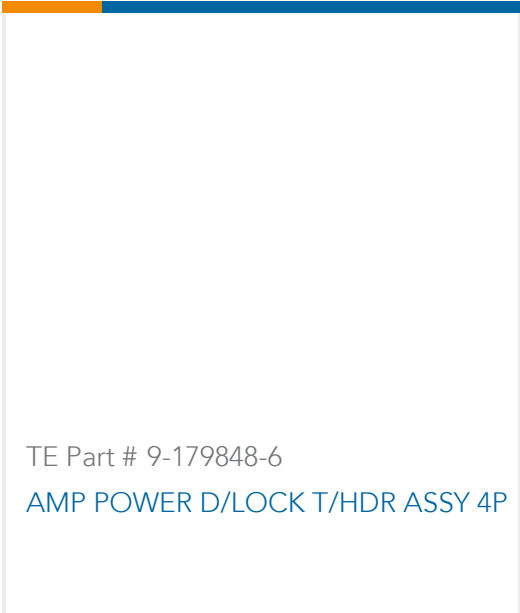
SVHC > Threshold:  
Not Yet Reviewed

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

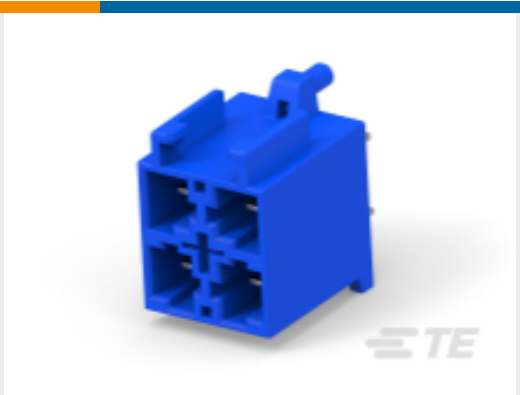 <p>TE Part # CAT-P87024-R2435 Power Double Lock Receptacle</p>	 <p>TE Part # 179593-1 AMP POWER D/LOCK RECCONT. L/P</p>	 <p>TE Part # 179592-2 POWER D/LOCK REC CONT. H/P L/P</p>	 <p>TE Part # 179592-1 AMP POWER D/LOCK REC CONT. L/P</p>
 <p>TE Part # 179593-2 POWER D/LOCK REC CONT. H/P L/P</p>	 <p>TE Part # 179848-6 AMP POWER D/LOCK T/HDR ASSY 4P</p>	 <p>TE Part # 1-179848-6 PDL 4P HDR 6.5 DR V/T ASSY BLU</p>	 <p>TE Part # 179859-6 AMP POWER D/LOCK TAB HDR 4P V</p>
 <p>TE Part # 9-179848-6 AMP POWER D/LOCK T/HDR ASSY 4P</p>			




Also in the Series | Power Double Lock



Connector Contacts(1)



Insertion & Extraction Tools(2)

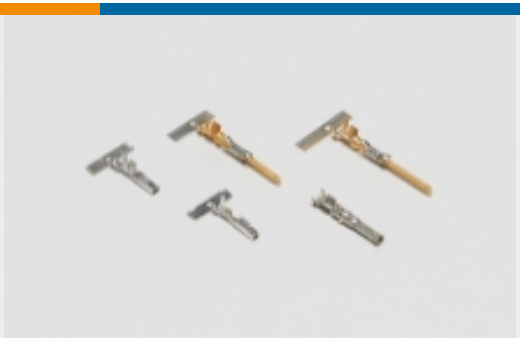

Power Contacts(23)



Rectangular Connector Locking(14)



Rectangular Power Connectors(284)

Customers Also Bought



TE Part #177912-1  
POWER D/LOCK CAP HSG 10P NATU.




TE Part #917687-1  
2.5 SIGNAL D/LOCK PLUG HSG 3P



TE Part #917764-1  
2.5 SIGNAL D/LOCK TAB CONT. L




TE Part #1-480426-0  
04P CMNL CAP HSG F/H NATL

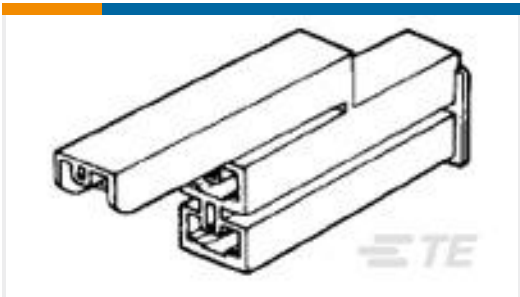


TE Part #1-172075-1  
3 POS PL 187(4.8 MM) HOUSING NATURAL



TE Part #61116-1  
CMNL PIN 24-18 PTBR

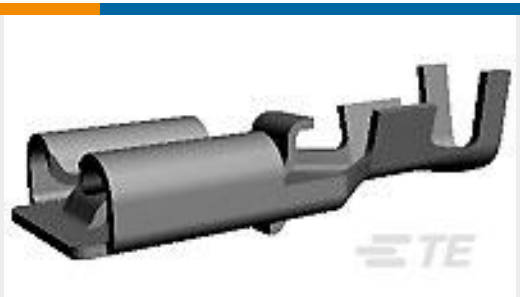


TE Part #179975-1  
250 PL EX REC. 15-10AWG PTBR

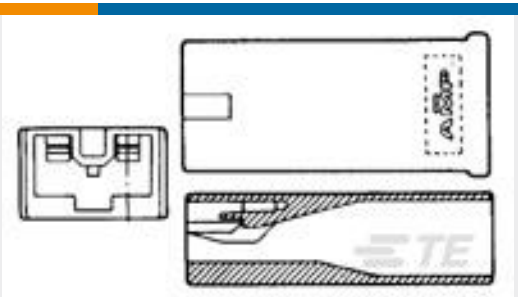

TE Part #179970-1  
250 HSG. PL EX REC.



TE Part #177900-1  
POWER DBL LOCK PLUG HSG 4P

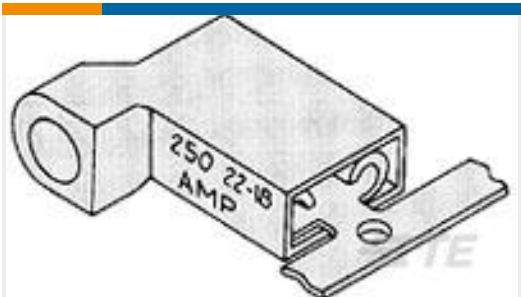

TE Part #3-520132-2  
ULTRAFAST 250 ASSY FLAG REC 16-14 TPBR



Documents

Product Drawings

AMP POWER D/LOCK PLUG HSG 4P

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_179861-6\_P.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_179861-6\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_179861-6\_P.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

Product Specifications

Product Specification

English

Agency Approvals

UL Report

English