177912-1 - ACTIVE

Power Double Lock

TE Internal #: 177912-1 Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wireto-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Cap



Rectangular Power Connector Type: Housing Connector & Housing Type: Cap

Connector System: Wire-to-Panel, Wire-to-Wire

Number of Positions: 10

Centerline (Pitch): 3.96 mm [.156 in]

All STD Temp Power Double Lock Cap (33)



Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Сар
Connector System	Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	10
Number of Rows	2
Electrical Characteristics	
Operating Voltage	300 VAC
Contact Features	
Contact Layout	Matrix

Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wire-to-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock



Contact Retention Within Housing	Without
Contact Type	Tab
Termination Features	
Termination Method to Wire & Cable	Crimp
Wire/Cable Type	Discrete Wire
Wire Type	Stranded
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	Nylon 6/6
Dimensions	
Row-to-Row Spacing	4.6 mm[.181 in]
Panel Thickness	.8 – 2 mm[.031 – .078 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	UL
Packaging Features	
Packaging Method	Bag
Packaging Quantity	100
Other	
For Use With	Contacts: 177916 or 177917, Double Lock Plate 177921-1, Plug: 177904

Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wire-to-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Canability	Not applicable for solder process capability

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wire-to-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock



TE Part # 5-177904-1 POWER D/LOCK PLUG HSG 10P

Also in the Series | Power Double Lock

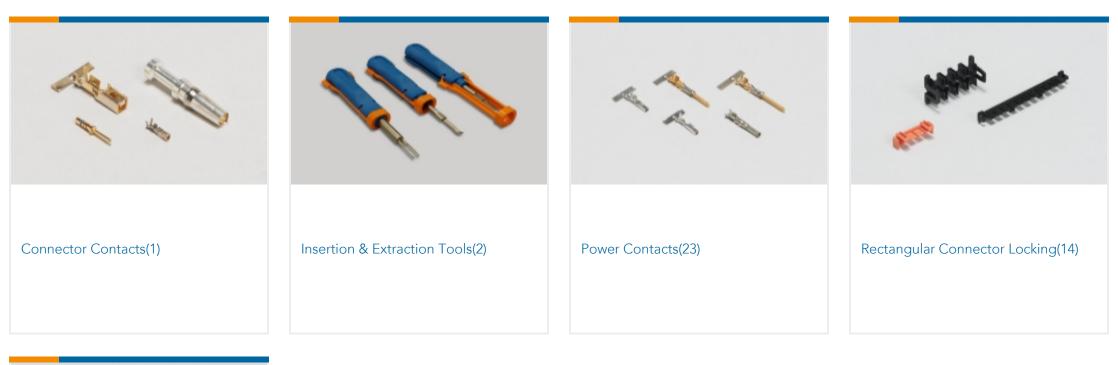



Rectangular Power Connectors(284)

Customers Also Bought



Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wire-to-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock





Documents

Product Drawings POWER D/LOCK CAP HSG 10P NATU.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_177912-1_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_177912-1_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_177912-1_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

1773458-5_POWER_DBL_LOCK_(PDL)_CONNECTORS

English

Product Specifications

Product Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

AMP POWER DOUBLELOCK CONNECTOR SERIES

Rectangular Power Connectors, Housing, Cap, Wire-to-Panel / Wire-to-Wire, 10 Position, .156 in [3.96 mm] Centerline, Wire & Cable, Power Double Lock



English
Agency Approvals
UL Report
English