DO NOT SCALE	METRIC	THIRD ANGLE PROJECTION
DIMENSIONS IN mm		

NOTES:

1. CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS. FOR CABLE REQUIREMENTS SEE APPLICATION SPECIFICATION 114-19022.
2. INDICATION OF FIRST CABLE POSITION REFERRING TO CORRESPONDING CONTACT POSITION (BLACK INK MARKS)
3. SOLDER-TINES FOR 0,8 ±0,1 DIA. HOLES.
4) PRODUCT SPECIFICATION 108-19033

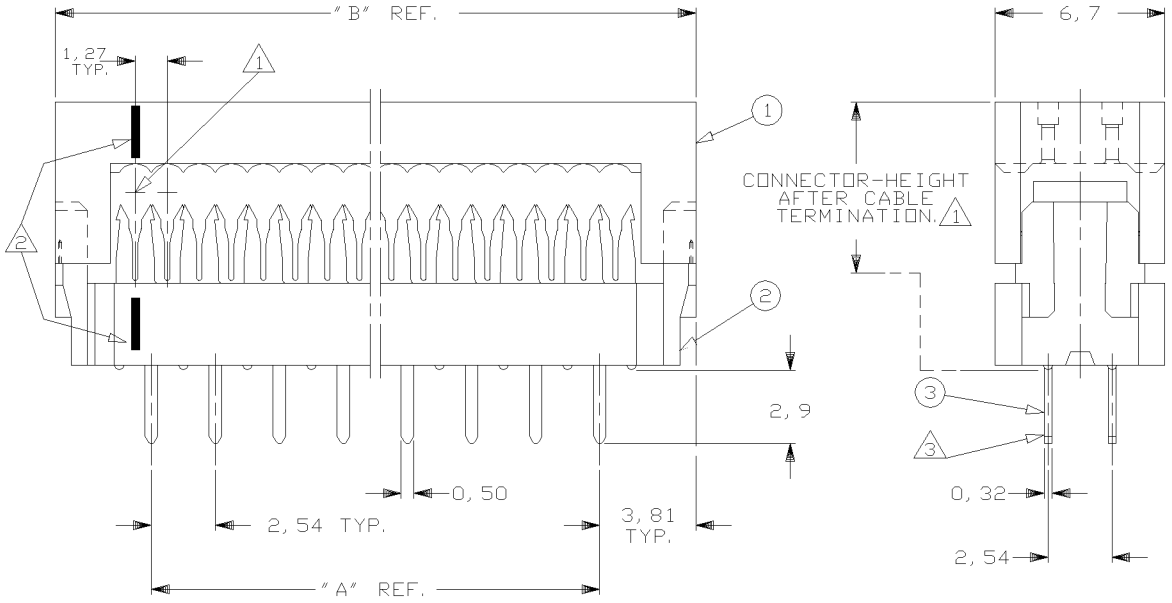

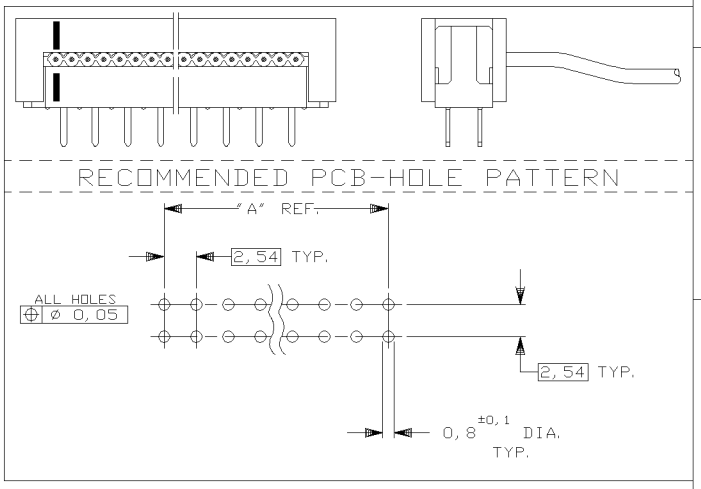

86,36	78,74	64	6-216093-4	B
81,28	73,66	60	6-216093-0	B
68,58	60,96	50	5-216093-0	B
60,96	53,34	44	4-216093-4	B
55,88	48,26	40	4-216093-0	B
48,26	40,64	34	3-216093-4	B
38,10	30,48	26	2-216093-6	B
30,48	22,86	20	2-216093-0	B
25,40	17,78	16	1-216093-6	B
22,86	15,24	14	1-216093-4	B
17,78	10,16	10	1-216093-0	B
12,70	5,08	6	216093-6	B
DIM. "B" REF.	DIM. "A" REF.	NR. OF POS.	PARTNUMBER	PART REV.

B2	REVISED FOR ET00-0243-04	A. V.	R. M.	21MAR2005
B1	REVISED PER ET00-0023-04	D. C.	C. T.	09FEB2004
B	-	-	-	22MAY1989
LTR.	REVISION RECORD	DR.	CHK.	DATE

③ CONTACTS	PHOSPHORBRONZE	3,0-5,1µm TIN WITH ENTIRE NICKEL UNDERCOATING
② HOUSING AND COVER / ① HOUSING	THERMOPLASTIC POLYESTER	GREY
COMPONENT NAME	MATERIAL	PLATING / COLOUR

CUSTOMER DRAWING

FOR REFERENCE ONLY

WILL NOT BE UPDATED

tyco Electronics

AMP ITALIA S.pA.
Corso F. lli Cervi, 15
COLLEGNO (TORINO)

~~THIS DRAWING IS UNPUBLISHED~~ RELEASED FOR PUBLICATION 22-8,1988

© COPYRIGHT 1988 BY AMP-HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED.
AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

DR. W. R. VERBEET.	DATE 22-8'88	WIRE RANGE SEE NOTE 1	NAME AMP-LATCH 2,54 DIL-PLUG CONNECTOR WITHOUT RETENTION LEGS.
CHK. R. VERSTIJNEN.	DATE 23-8'88	INSUL. RANGE SEE NOTE 1	
APP. L. v SOEST.	DATE 23-8'88	SIZE A3 / SHEET 1 OF 1	DWG. No. C-216093 / REV. LTR. B2

8 7 6 5 4 3 2 1