



⊕ 0.3 Y Z

ロック
LOCK



ターミナル装着状態図
TERMINAL ASSEMBLY DRAWING


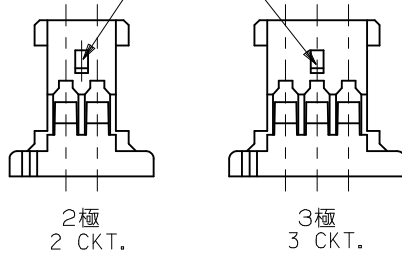


注記 NOTES

1. 嵌合相手: 53779-**10, 53780-**10
MATES: 53779-**10, 53780-**10
2. 適合ターミナル: 50641-8***
APPLICABLE TERMINAL: 50641-8***
3. 偶数極の製品に適用。
APPLY EVEN CIRCUIT PRODUCTS.
4. 材料: PBTP, UL94V-0
MATERIAL

22.50	40.72	38.72	37.72	36.25	51146-3000	30
22.50	38.22	36.22	35.22	33.75	-2800	28
22.50	35.72	33.72	32.72	31.25	-2600	26
22.50	33.22	31.22	30.22	28.75	-2400	24
22.50	30.72	28.72	27.72	26.25	-2200	22
22.50	28.22	26.22	25.22	23.75	-2000	20
21.25	26.97	24.97	23.97	22.50	-1900	19
20.00	25.72	23.72	22.72	21.25	-1800	18
18.75	24.47	22.47	21.47	20.00	-1700	17
17.50	23.22	21.22	20.22	18.75	-1600	16
16.25	21.97	19.97	18.97	17.50	-1500	15
15.00	20.72	18.72	17.72	16.25	-1400	14
13.75	19.47	17.47	16.47	15.00	-1300	13
12.50	18.22	16.22	15.22	13.75	-1200	12
11.25	16.97	14.97	13.97	12.50	-1100	11
10.00	15.72	13.72	12.72	11.25	-1000	10
8.75	14.47	12.47	11.47	10.00	-0900	9
7.50	13.22	11.22	10.22	8.75	-0800	8
6.25	11.97	9.97	8.97	7.50	-0700	7
5.00	10.72	8.72	7.72	6.25	-0600	6
3.75	9.47	7.47	6.47	5.00	-0500	5
2.50	8.22	6.22	5.22	3.75	-0400	4
	6.97	4.97	3.97	2.50	-0300	3
	5.72	3.72	2.72	1.25	51146-0200	2

51146-**00	E	D	C	B	A	PLASTIC BAG	CKT.
MODEL NO.						ORDER No. オーダー番号	

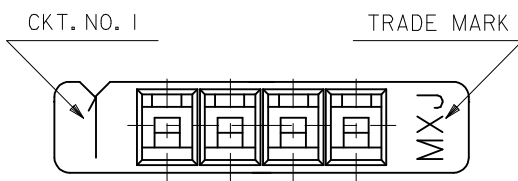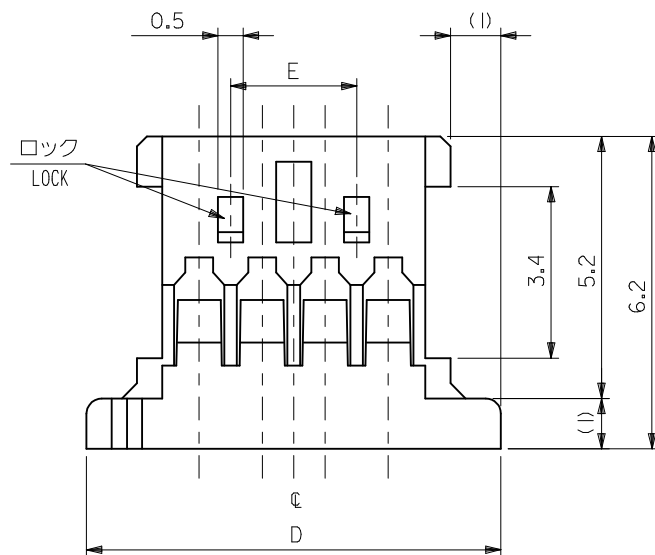

REVISED EC NO: J2009-0744 DRWN: MABEI 2008/09/24 CHKD: THARUYAMA 2008/09/24 APPR: NUKITA 2008/09/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±0.2	DRAWN BY Y. MIZUNO	DATE '95/12/25	TITLE 1.25 WIRE TO BOARD CONN. HOUSING		
	10 OVER 30 UNDER	±0.25	CHECKED BY Y. MIZUNO	DATE '96/08/20	MOLEX INCORPORATED		
	30 OVER	±0.3	APPROVED BY M. FUKUSHIMA	DATE '96/08/20	DOCUMENT NO. SD-51146-001		
	ANGULAR ±3 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		SHEET NO. 1 OF 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					