

PRODUCT NUMBER


71600-YXXLF

LEAD FREE, SEE NOTE 6

TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2


OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1
NOTE 5

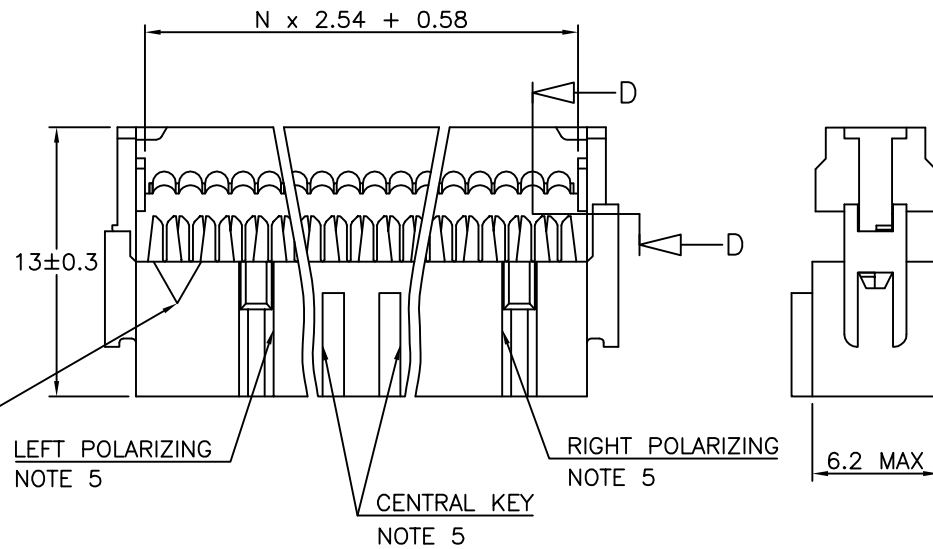

NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.
- 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.
- 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.
- 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT
- 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT
- 6 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.
PACKAGING SPECIFICATION AS PER GS-14-920.

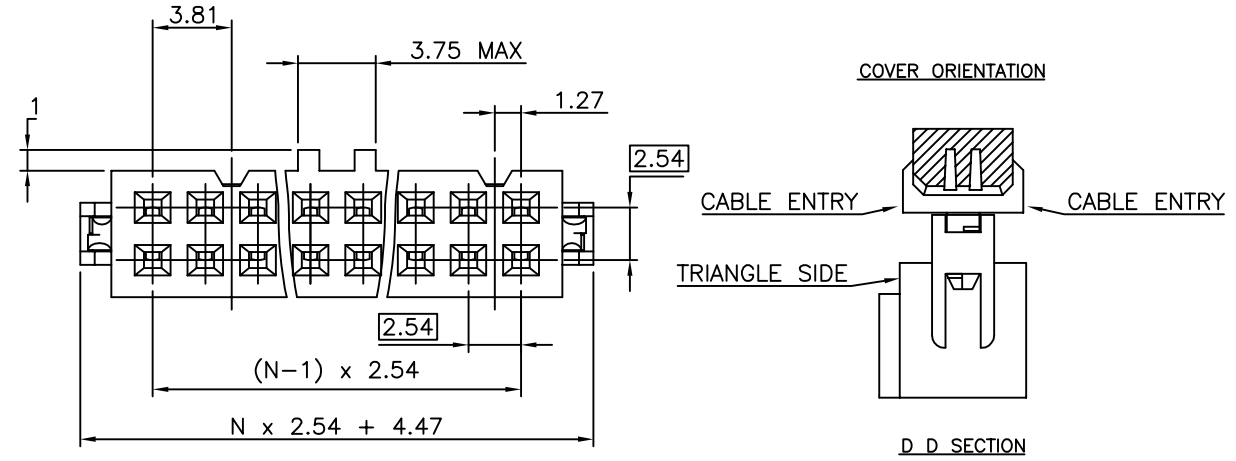

mat'l. code SEE NOTES		surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family 2.54MM IDC
ltr	ecn no	dr	date	tolerances unless otherwise specified	title
AP	F12-0046	LMU	12.04.25	angles linear	QUICKIE III FEM 0.76µm Au
AJ	F05-0171	LMU	05.04.07	X.X ±0.3 X.XX ±0.13 X.XXX ±0.05	scale 5:1
AK	F05-0180	LMU	05.04.22	dr	D.LE 01.01.24
AL	F06-0270	LMU	06.09.12	engr	P.NZ 01.01.24
AM	F06-0274	LMU	06.09.25	chr	JF.N 01.01.24
AN	F09-0233	LMU	09.12.15	appd	P.NZ 01.01.24
sheet index	revision sheet	AP	AE		
	1	2			



dwg no 71600 sheet 1 of 2 size A3
type CUSTOMER Drawing


CORE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	18
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


CATALOGUE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	18
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64

PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


624
304
204 / 224
004
DASHES NOT AVAILABLE




WITHOUT STRAIN RELIEF

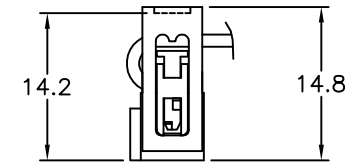


WITH LOW PROFILE STRAIN RELIEF

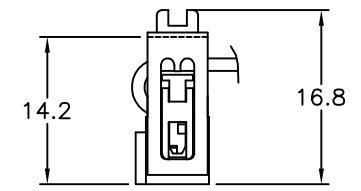

WITH STANDARD STRAIN RELIEF

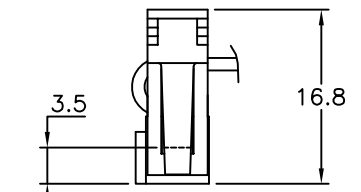

WITH LATCHING STRAIN RELIEF

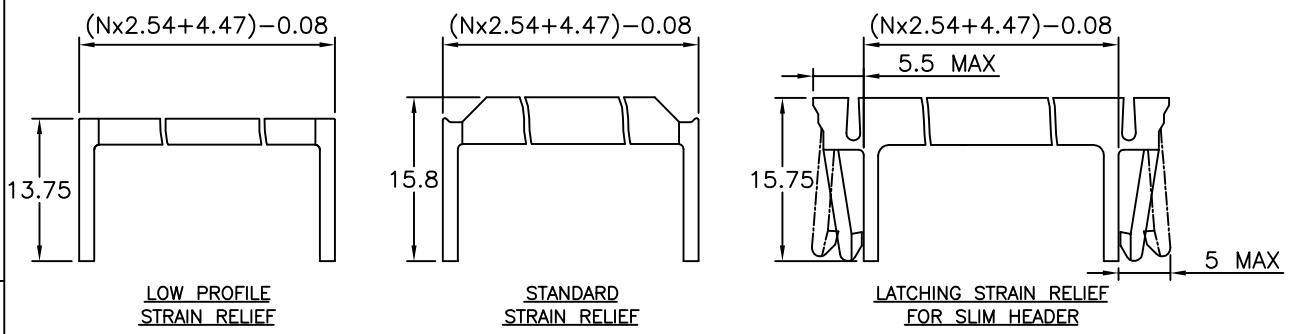

LOW PROFILE STRAIN RELIEF

STANDARD STRAIN RELIEF

LATCHING STRAIN RELIEF FOR SLIM HEADER

71600-6YYLF	●					●
71600-3YYLF		●	●			
71600-2YYLF	●				●	
71600-1YYLF	●			●		
71600-0YYLF	●		●			
PRODUCT NUMBER	WITH	WITHOUT	STANDARD	WITHOUT	LOW PROFILE	LATCHING
	CENTRAL KEY		STRAIN RELIEF			

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101		mm		QUICKIE	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
X	F70666	AAN	97.11.05	angles	linear	mm		IDC RECEPT DR	
Y	F10121	DLE	01.01.24			scale N/A			
AA	F10199	GCO	01.04.26						
AB	F03019	DLE	03.01.23	dr	D.LE	01.01.24	dwg no		
AC	F05-0180	LMU	05.04.22	engr	P.NZ	01.01.24	sheet 2 of - size		
AD	F06-0270	LMU	06.09.12	chr	JF.N	01.01.24	71600 A3		
AE	F06-0274	LMU	06.09.25	appd	P.NZ	01.01.24	type CUSTOMER Drawing		
sheet index	revision sheet								

FCi
 FCiconnect.com
 Copyright FCi