

Positive Lock | Positive Lock 250

TE Internal #: 926523-1

Crimp Terminal Housings, Receptacle, Receptacle, 3 Position, Straight, UL 94V-0, Black, Polyamide 6.6 GF, Mating Alignment,

Positive Lock 250

View on TE.com >



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: Receptacle
Housing Type: Receptacle
Number of Positions: 3
Terminal Orientation: Straight

UL Flammability Rating: UL 94V-0

Features

Product Type Features

Terminal Orientation

Contact Mating Retention

Product Type Features	
Product Type	Terminal Housing
Sealable	No
Housing Type	Receptacle
Insulated	No
Configuration Features	
Number of Positions	3
Body Features	
Number of Rows	1
Primary Product Color	Black
Contact Features	
Terminal Type	Receptacle

Straight

Without



Mechanical Attachment

Mating Alignment	With
Crimp Terminal Housing Mounting Style	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Polyamide 6.6 GF
Centerline (Pitch)	8.3 mm[.326 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	5000
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 926330-1
PL 250 REC HSG 6P NYLON BLACK



TE Part # 1-154719-0
PL 250 REC HSG 1P NYLON NAT



TE Part # 926646-1
PL 250 REC HSG 8P NYLON BLACK



TE Part # 926526-1
PL MKI 250 REC HSG 5P NYLON
BLACK



TE Part # 927076-1
PL HOUSING 0.6 PA 6.6 + PE-GF13
BLACK



TE Part # 4-154719-0
POSITIVE LOCK (PL) RECEPTACLE



TE Part # 1-926522-1
PL 250 REC HSG 2P NYLON BLACK



TE Part # 926330-3 6P POS-LOCK BU GEH



TE Part # 100100-1 2 POS POSITIVE LOCK (PL) HOUSING



TE Part # 926524-1
PL 2P HOUSING PA6.6 ZYTEL 101
BLACK

Also in the Series | Positive Lock 250



Automotive Terminals(1)



Crimp Terminal Housings(203)




Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)



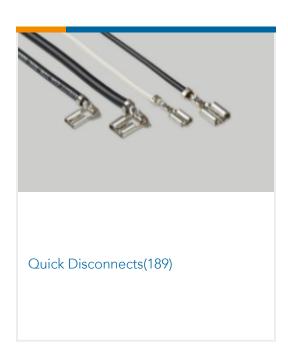

Customers Also Bought



Documents

Product Drawings
3P.POS.LOCK HSG

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_926523-1_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_926523-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_926523-1_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.